

ESB40 installation contactors

40 A AC-1 / AC-7a

AC / DC operated



ESB40

2CDC221003R0010

Description

The ESB40 installation contactors are used for the control of single and three-phases loads up to 40 A. Due to their DC solenoid actuator, the ESB40 can be connected to AC or DC voltages. This provides the following benefits:


Hum-free operating system, no vibration, silent in operation, low power consumption, integrated high overvoltage protection. You can choose between a various N.O. and N.C. contacts combinations.

Main accessories: Auxiliary contact blocks EH04.

Ordering details

Main contacts	Width in number of modular spacings	Rated control circuit voltage V AC/DC	Type	Order code	Pkg qty	Weight (1 pc)
					pcs	kg
	3	12	ESB40-40-12AC/DC	GHE3491102R1004	3	0.405
		24	ESB40-40-24AC/DC	GHE3491102R0001	3	0.405
		42	ESB40-40-42AC/DC	GHE3491102R0002	3	0.405
		48	ESB40-40-48AC/DC	GHE3491102R0003	3	0.405
		110	ESB40-40-110AC/DC	GHE3491102R0004	3	0.405
		230	ESB40-40-230AC/DC	GHE3491102R0006	3	0.405
		400	ESB40-40-400AC/DC	GHE3491102R0007	3	0.400
	3	415	ESB40-40-415AC/DC	GHE3491102R0008	3	0.395
		24	ESB40-22-24AC/DC	GHE3491302R0001	3	0.405
		230	ESB40-22-230AC/DC	GHE3491302R0006	3	0.405
	3	24	ESB40-31-24AC/DC	GHE3491602R0001	3	0.405
		230	ESB40-31-230AC/DC	GHE3491602R0006	3	0.405
	3	24	ESB40-30-24AC/DC	GHE3491502R0001	3	0.385
		230	ESB40-30-230AC/DC	GHE3491502R0006	3	0.385
		400	ESB40-30-400AC/DC	GHE3491502R0007	3	0.385
	3	24	ESB40-20-24AC/DC	GHE3491402R0001	3	0.370
		230	ESB40-20-230AC/DC	GHE3491402R0006	3	0.370

Main dimensions mm, inches

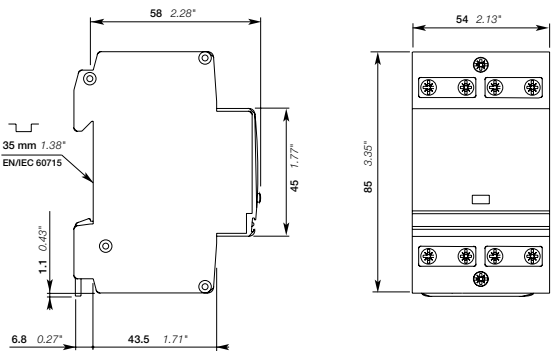

ESB40

2CDC222003R0014