

ESB63 installation contactors

63 A AC-1 / AC-7a

AC / DC operated



ESB63

2CDC221002F0010

Description

The ESB63 installation contactors are used for the control of single and three-phases loads up to 63 A. Due to their DC solenoid actuator, the ESB63 can be connected to AC or DC voltages. This provides the following benefits:


Hum-free operating system, no vibration, silent in operation, low power consumption, integrated high overvoltage protection. You can choose between a various N.O. and N.C. contacts combinations.

Main accessories: Auxiliary contact blocks EH04.

Ordering details

Main contacts	Width in number of modular spacings	Rated control circuit voltage V AC/DC	Type	Order code	Pkg qty	Weight (1 pc)
					pcs	kg
	3	12	ESB63-40-12AC/DC	GHE3691102R1004	3	0.405
		24	ESB63-40-24AC/DC	GHE3691102R0001	3	0.405
		42	ESB63-40-42AC/DC	GHE3691102R0002	3	0.405
		48	ESB63-40-48AC/DC	GHE3691102R0003	3	0.405
		110	ESB63-40-110AC/DC	GHE3691102R0004	3	0.405
		230	ESB63-40-230AC/DC	GHE3691102R0006	3	0.405
		400	ESB63-40-400AC/DC	GHE3691102R0007	3	0.400
	3	415	ESB63-40-415AC/DC	GHE3691102R0008	3	0.405
		400	ESB63-22-400AC/DC	GHE3691302R0007	3	0.405
	3	110	ESB63-31-110AC/DC	GHE3691602R0004	3	0.405
		230	ESB63-31-230AC/DC	GHE3691602R0006	3	0.405
	3	230	ESB63-30-230AC/DC	GHE3691502R0006	3	0.385
		400	ESB63-30-400AC/DC	GHE3691502R0007	3	0.385
	3	24	ESB63-20-24AC/DC	GHE3691402R0001	3	0.370
		230	ESB63-20-230AC/DC	GHE3691402R0006	3	0.370
	3	230	ESB63-11-230AC/DC	GHE3691802R0006	3	0.370

Main dimensions mm, inches

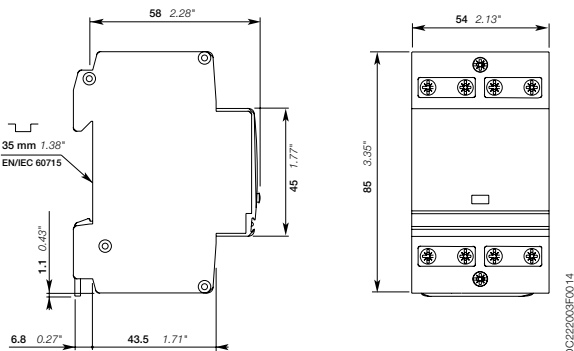

ESB63

2CDC222003F0014