# Product data sheet

Specifications





advanced touchscreen panel, Harmony GTO, stainless, 640 x 480pixels VGA, 10.4inch TFT, 96MB

HMIGTO5315

Product availability: Non-Stock - Not normally stocked in distribution facility

### Price\*: 4,895.00 USD

### Main

Range Of Product	Harmony GTO Advanced touchscreen panel			
Product Or Component Type				
Display Colour	65536 colours			
Display Size	10.4 inch			
Supply	External source			
Operating System	Harmony			
Battery Type	Lithium internal RAM 100 days 5 day(s) 10 year(s)			
Provided Equipment	1 protective cover			

### Complementary

e emprementar y						
Terminal Type	Touchscreen display					
Display Type	Backlit colour TFT LCD					
Display Resolution	640 x 480 pixels VGA					
Touch Sensitive Zone	1024 x 1024					
Touch Panel	Resistive film, 1000000 cycles					
Backlight Lifespan	50000 hours white 77 °F (25 °C)					
Brightness	16 levels by touch panel 16 levels by software					
Character Font	Chinese (simplified Chinese) Japanese (ANK, Kanji) Taiwanese (traditional Chinese) Korean ASCII					
[Us] Rated Supply Voltage	24 V DC					
Supply Voltage Limits	19.228.8 V					
Inrush Current	30 A					
Maximum Power Consumption In W	<ul> <li>In 12 W when power is not supplied to external devices</li> <li>7 W when backlight is OFF</li> <li>8 W when backlight is dimmed</li> <li>17 W</li> </ul>					

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Local Signalling	Status LED green, steady offline					
	Status LED green, steady operating					
	Status LED orange, flashing software starting up					
	Status LED red, steady power supply (ON)					
	Status LED clear, faded power supply (OFF) COM2 LED yellow, steady data is being transmitted COM2 LED yellow, faded no data transmission					
	SD card LED green, steady card is inserted					
	SD card LED green, faded card is not inserted or is not being accessed					
Software Designation	Vijeo Designer configuration software >= V6.1					
Memory Description	Flash EPROM, 96 MB					
Data Backed Up	512 KB internal RAM SRAM)					
Data Storage Equipment	SD card, <= 32 GB					
	SDHC card, <= 32 GB					
Downloadable Protocols	Schneider Electric Modicon Modbus					
	Schneider Electric Modicon Uni-TE					
	Schneider Electric Modicon Modbus Plus					
	Schneider Electric Modicon FIPWAY					
	Mitsubishi Melsec third party protocols					
	Omron Sysmac third party protocols					
	Rockwell Automation Allen-Bradley third party protocols					
	Siemens Simatic third party protocols					
	Schneider Electric Modicon Modbus TCP					
Integrated Connection Tune						
Integrated Connection Type	COM1 serial link SUB-D 9 RS232C 2400115200 bps					
	COM2 serial link RJ45 RS485 2400115200 bps					
	COM2 serial link RJ45 RS485 187.5 kbps Siemens MPI					
	Ethernet RJ45 10BASE-T/100BASE-TX					
	Ethernet RJ45 IEEE 802.3					
	USB 2.0 type A					
	USB 2.0 type mini B					
Product Mounting	Flush mounting					
Fixing Mode	by 8 nuts					
	by 4 L brackets					
Front Material	Stainless steel 304					
Enclosure Material	РРТ					
Type Of Cooling	Natural convection					
Width	12.46 in (316.5 mm)					
Height	10.18 in (258.5 mm)					
Depth	2.24 in (57 mm)					
Net Weight	5.51 lb(US) (2.5 kg)					

# Environment

Standards	IEC 61131-2 IEC 61000-6-2 UL 508			
Product Certifications	C-tick cULus CE KCC UKCA UKEX			
Ambient Air Temperature For Operation	32131 °F (055 °C)			
Ambient Air Temperature For Storage	-4140 °F (-2060 °C)			
Relative Humidity	1090 % without condensation			
Operating Altitude	< 6561.68 ft (2000 m)			

Ip Degree Of Protection	IP20 IEC 60529 rear panel) IP66K IEC 60529 front panel) IP66K DIN 40050-9 front panel)					
Nema Degree Of Protection         NEMA 4X front panel (indoor use)						
Shock Resistance	147 m/s <sup>2</sup> 3 chocks in each direction X, Y and Z IEC 61131-2					
Vibration Resistance         3.5 mm 59 Hz) - X, Y, Z directions for 10 cycles (approx. 100 min)           1 gn 9150 Hz) - X, Y, Z directions for 10 cycles (approx. 100 min)						
Resistance To Electrostatic Discharge	6 kV contact discharge IEC 61000-4-2 level 3					

# Ordering and shipping details

Category	US10MC222569			
Discount Schedule	0MC2			
Gtin	3595864150291			
Returnability	No			
Country Of Origin	ID			

# **Packing Units**

Unit Type Of Package 1	PCE		
Number Of Units In Package 1	1		
Package 1 Height	7.09 in (18.000 cm)		
Package 1 Width	11.81 in (30.000 cm)		
Package 1 Length	13.98 in (35.500 cm)		
Package 1 Weight	7.58 lb(US) (3.439 kg)		
Unit Type Of Package 2	P12		
Number Of Units In Package 2	20		
	30		
Package 2 Height	45.28 in (115.000 cm)		
Package 2 Height Package 2 Width			
	45.28 in (115.000 cm)		

# **Contractual warranty**

Warranty

18 months

# Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance



Rohs Exemption Information

## **Certifications & Standards**


Reach Regulation	REACh Declaration					
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)					
China Rohs Regulation	China RoHS declaration					
Environmental Disclosure	Product Environmental Profile					
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.					
Weee Circularity Profile						

# Product data sheet

### **Dimensions Drawings**

#### Dimensions

#### **External Dimensions**

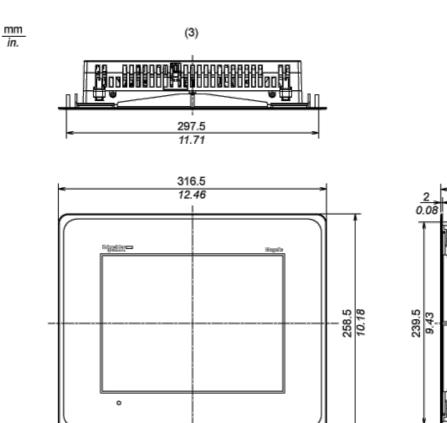




- 1 Front
- 2 Right Side
- 3 Top

### Installation with Installation Fasteners


57 2.24

(2)

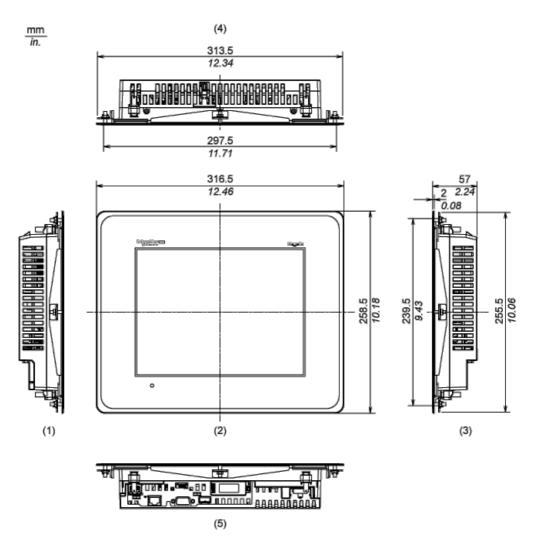

- 1 Left Side
- 2 Front
- 3 Right Side
- 4 Тор
- 5 Bottom

#### **Dimensions with Cables**

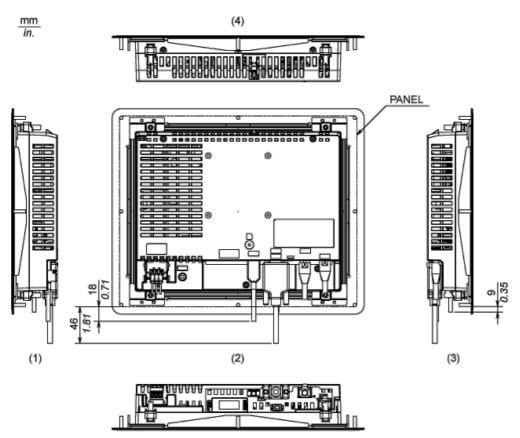

(5)


- 1 Left Side
- 2 Rear
- 3 Right Side
- 4 Top
- 5 Bottom

# Product data sheet

Mounting and Clearance

#### Mounting


### **Panel Cut Dimensions**

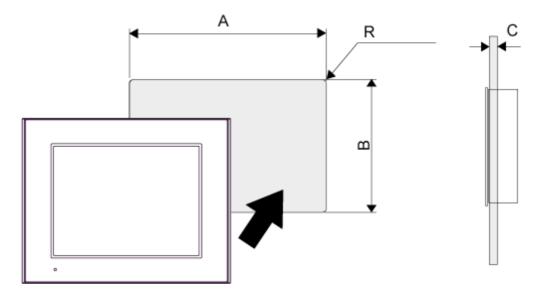


A		В		С		R	
mm	in.	mm	in.	mm	in.	mm	in.
298 (+1, -0)	11.73 (+0.04, -0)	240 (+1, -0)	9.45 (+0.04, -0)	1.65	0.060.2	3 max.	0.12 max.

### Installation Fastener Dimensions










#### Installation Requirements

#### **Mounting Angle**



When installing the panel in a slanted position with an incline more than  $30^{\circ}$ , the ambient temperature must not exceed 40 °C (104 °F). You may need to use forced air cooling (fan,A/C) to ensure the ambient operating temperature is  $40^{\circ}$ C or less (104 °F or less).

#### Clearance

