Specifications



Rack PC 4U Performance HMIRSP HDD, AC 6 slots, Windows 7 for EcoStruxure Hybrid

HMIRSPHXA67P1

① Discontinued

Discontinued on: Oct 12, 2021

() To be end-of-service on: Jun 30, 2025

Main

Range of Product	Harmony iPC	
Product or Component Type	Industrial rack PC	
Device short name	Rack PC 4U Performance	
Range Compatibility	IDisplay	
Processor name	Intel Xeon quad-core 1225 3.1 GHz L3 cache 8 MB	
Storage slots	1 internal slot (SATA3) 4 hot swap trays (SATA2)	
Data storage equipment	500 GB Internal enterprise hard disk - hot swap	
Memory description	Up to 32 GB RAM DDR3 internal 4 16 GB RAM DDR3 internal 2 by default)	

Complementary

complementary		
3 PCI		
4 PCI express 16x		
DVD-RW		
Intel HD Graphics 2500		
2048 x 1536 pixels		
1255 ms		
2 fans with speed control		
1 VGA		
1 DVI video port		
2 USB 3.0 port		
1 COM1 serial link - male SUB-D 9 - RS232		
1 audio micro input		
1 audio line output		
4 USB 2.0 port		
4 COM1 serial link (optional) - male SUB-D 9		
2 Ethernet - RJ45 10/100/1000 Mbit/s)		
Case open		
Windows 7 64 bits Ultimate - multi-language		
Vijeo Designer run time demo run time demo license not included		
EcoStruxure Operator Terminal Expert run time demo license not included		
PES license not included		
ATX		
100240 V AC power supply		
500 W		

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Mounting Support	19" rack	
Depth	23.7 in (601.4 mm)	
Height	6.8 in (172.7 mm)	
Width	19.0 in (482 mm)	
Net Weight	45.9 lb(US) (20.8 kg)	

Environment

Product certifications	ccc	
	EAC	
	CULus	
Standards	CSA 22-2 No 60950-1-07	
	EN 55011: class A group 1	
	EN 60950-1	
	EN 61000-6-2	
	EN 61000-6-4	
	FCC part 15	
	UL 60950-1	
Quality labels	CE	
Directives	2006/95/EC - low voltage directive	
	2004/108/EC - electromagnetic compatibility	
IP degree of protection	IP40 conforming to IEC 60529	
Ambient air temperature for storage	-4140 °F (-2060 °C) IEC 60068-2-2	
Relative Humidity	1085 % non-condensing IEC 60068-2-78	
Ambient air temperature for operation	32.000000000104.000000000 °F (040 °C) IEC 60068-2-2	
Vibration resistance	0.002 g²/Hz 5500 Hz) operating IEC 60068-2-64	
	2 gn 5500 Hz) not operating IEC 60068-2-6	
Shock resistance	10 gn 11 ms IEC 60068-2-27	

Ordering and shipping details

Category	22575-MAGELIS MC3	
Discount Schedule	MC3	
GTIN	3606480684319	
Returnability	No	
Country of origin	CN	

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	7.0 in (17.7 cm)	
Package 1 Width	23.6 in (60.0 cm)	
Package 1 Length	19.0 in (48.2 cm)	
Package 1 Weight	45.9 lb(US) (20.8 kg)	

Contractual warranty

Warranty

18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Well-being performance

Reach Free Of Svhc	
Mercury Free	
Rohs Exemption Information	Yes
Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
California Proposition 65	"WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov"

Product data sheet


Dimensions Drawings

Dimensions


Top View



Front View



Side View

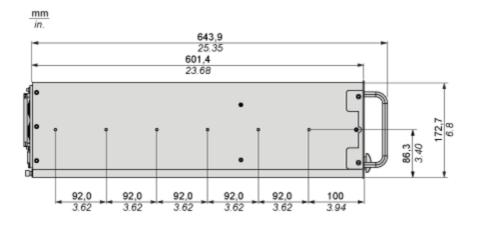

Product data sheet

Mounting and Clearance

Mounting

Unit Designed for M4 Screws

