Product data sheet

Specifications





() Discontinued

integrated drive ILA with servo motor - 24..48V - Ethernet Powerlink- indus conn

ILA2P572TC1A0

() Discontinued on: Nov 9, 2020

() End-of-service on: Nov 30, 2020

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

in and		
Range of Product	Lexium integrated drive	
Product or Component Type	Motion integrated drive	
Device short name	ILA	
Motor Type	AC Synchronous Servo Motor	
Number of motor poles	6	
Phase	Single phase	
[Us] rated supply voltage	24 V 48 V	
Network type	DC	
Communication interface	Ethernet Powerlink, Integrated	
Length	6.4 in (163.8 mm)	
Winding type	High speed of rotation and medium torque	
Electrical Connection	Industrial connector	
Holding brake	Without	
Gear box type	Without	
Nominal speed	3000 rpm 24 V 5100 rpm 48 V	
Nominal torque	5.04 lbf.in (0.57 N.m)	

Complementary

• •	
Transmission Rate	100 Mbits
Mounting Support	Flange
Motor flange size	2.2 in (57 mm)
Number of motor stacks	2
Centring collar diameter	2.0 in (50 mm)
Centring collar depth	0.06 in (1.6 mm)
Number of mounting holes	4
Mounting holes diameter	0.2 in (5.2 mm)
Circle diameter of the mounting holes	2.6 in (66.6 mm)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Feedback type	Single turn encoder	
Shaft end	Untapped	
Second shaft	Without second shaft end	
Shaft diameter	0.4 in (9 mm)	
Shaft length	0.8 in (20 mm)	
Supply voltage limits	1855.2 V	
Current consumption	7500 mA maximum continuous 9000 mA peak	
Associated fuse rating	16 A	
Commissioning interface	RS485 Modbus TCP 9.6, 19.2 and 38.4 kbauds)	
Input/output type	4 signals (each be used as input or output)	
Voltage state 0 guaranteed	-34.5 V	
Voltage state 1 guaranteed	1530 V	
Discrete input current	10 mA at 24 V safety input 2 mA at 24 V 24 V signal interface	
Discrete output voltage	2325 V	
Maximum switching current	100 mA per output 200 mA total	
Protection Type	Overload of output voltage Safe torque off Short circuit of the output voltage	
Peak stall torque	7.52 lbf.in (0.85 N.m)	
Continuous stall torque	5.04 lbf.in (0.57 N.m)	
Speed feedback resolution	16384 points/turn	
Accuracy error	+/- 0.05 °	
Rotor inertia	0.173 kg.cm ²	
	-	
Maximum radial force Fr	107 N	
Maximum radial force Fr Maximum axial force Fa	107 N 104 N force pressure) 104 N tensile force)	
	104 N force pressure)	
Maximum axial force Fa	104 N force pressure) 104 N tensile force)	
Maximum axial force Fa	104 N force pressure) 104 N tensile force) 20000 h bearing	

Environment

Standards	EN 61800-3:2001, second environment EN 61800-3 : 2001-02 EN/IEC 50178 IEC 61800-3, Ed 2 EN 50347 EN/IEC 61800-3 IEC 60072-1	
Product Certifications	UL TÜV cUL	
Ambient air temperature for operation	104131 °F (4055 °C) with power derating of 2 % per °C) 32104 °F (040 °C) without derating)	
Permissible ambient air temperature around the device	221 °F (105 °C) power amplifier 230 °F (110 °C) motor	

Ambient Air Temperature for Storage	-13158 °F (-2570 °C)	
Operating altitude	<= 3280.84 ft (1000 m) without derating	
Relative humidity	1585 % without condensation	
Vibration resistance	20 m/s² 10500 Hz) 10 cycles EN/IEC 60068-2-6	
Shock resistance	150 m/s² 1000 shocks EN/IEC 60068-2-29	
IP degree of protection	IP41 shaft bushing: conforming to EN/IEC 60034-5 IP54 total except shaft bushing: conforming to EN/IEC 60034-5	

Ordering and shipping details

Category	18288 - LEXIUM INTEGRATED DRIVES II	
Discount Schedule	PC56	
GTIN	3606485187792	
Returnability	No	
Country of origin	DE	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.5 in (11.5 cm)
Package 1 Width	7.5 in (19 cm)
Package 1 Length	15.6 in (39.5 cm)
Package 1 Weight	4.4 lb(US) (2 kg)

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free
Rohs Exemption Information Yes
Pvc Free


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Integrated Drive without Holding Brake


Dimensions

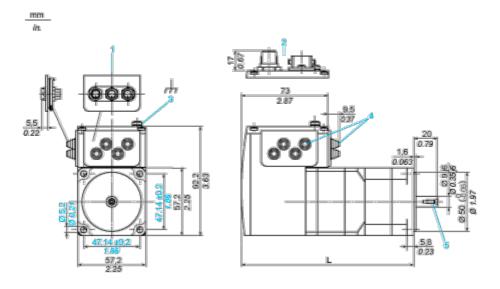

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries $\emptyset = 3 \dots 9 \text{ mm}/0.12 \dots 0.35 \text{ in.}$
- 5 Centring hole DIN 332 DS M3
- L 163.8 mm/6.45 in.


Connections and Schema

Connection Example with 4 I/O Signals

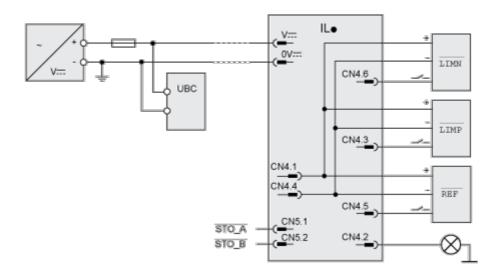

Performance Curves

Torque Characteristics



- X Speed of rotation in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 48 V
- 2 Continuous torque