Product data sheet






brushless DC motor, Lexium ILA ILE ILS, 24..48 V, EtherNet/IP interface, L = 122mm, w/o gearbox

ILE2K661PB1A0

! Discontinued on: Oct 9, 2023



Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Lexium integrated drive	
Product or Component Type	Motion integrated drive	
Device short name	ILE	
Motor Type	Brushless DC motor	
Number of motor poles	6	
Phase	Single phase	
[Us] rated supply voltage	48 V 24 V	
Network type	DC	
Communication interface	Ethernet/IP, Integrated	
Length	4.8 in (122 mm)	
Winding type	Medium speed of rotation and medium torque	
Electrical Connection	Printed circuit board connector	
Holding brake	Without	
Gear box type	Without	
Reduction ratio	1:1	
Nominal speed	4800 rpm 24 V 6000 rpm 48 V	
Nominal torque	2.30 lbf.in (0.26 N.m) 24 V 2.30 lbf.in (0.26 N.m) 48 V	

Complementary

Transmission Rate	125, 250, 500 kbauds
Mounting Support	Flange
Motor flange size	2.6 in (66 mm)
Number of motor stacks	1
Centring collar diameter	1.6 in (40 mm)
Centring collar depth	0.08 in (2 mm)
Number of mounting holes	4
Mounting holes diameter	0.2 in (4.4 mm)
Circle diameter of the mounting	2.90 in (73.54 mm)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Life Is On Schneider Jul 3, 2024

Feedback type	BLDC encoder
Shaft end	Untapped
Second shaft	Without second shaft end
Shaft diameter	0.3 in (8 mm)
Shaft length	1.0 in (25 mm)
Supply voltage limits	1855.2 V
Current consumption	7000 mA peak 5500 mA maximum continuous
Associated fuse rating	16 A
Commissioning interface	RS485 Modbus TCP 9.6, 19.2 and 38.4 kbauds)
Input/output type	4 signals (each be used as input or output)
Voltage state 0 guaranteed	-34.5 V
Voltage state 1 guaranteed	1530 V
Discrete input current	10 mA at 24 V on/STO_A safety input 3 mA at 24 V on/STO_B safety input 2 mA at 24 V 24 V signal interface
Discrete output voltage	2325 V
Maximum switching current	100 mA per output 200 mA total
Protection Type	Safe torque off Overload of output voltage Short circuit of the output voltage
Maximum supply current	0.1 A power stage disabled) 6.8 A 24 V 3.8 A 48 V
Nominal output power	131 W 24 V 163 W 48 V
Peak stall torque	3.81 lbf.in (0.43 N.m) 24 V 3.81 lbf.in (0.43 N.m) 48 V
Continuous stall torque	2.48 lbf.in (0.28 N.m)
Detent torque	0.71 lbf.in (0.08 N.m)
Speed feedback resolution	12 points/turn
Accuracy error	+/- 0.5 °
Rotor inertia	0.17 kg.cm²
Maximum mechanical speed	7000 rpm 6500 rpm
Maximum radial force Fr	80 N
Maximum axial force Fa	30 N force pressure) 30 N tensile force)
Service life in hours	20000 h bearing
marking	CE
Type of cooling	Natural convection
Net Weight	3.09 lb(US) (1.4 kg)

Environment

Otherwise	
Standards	EN 50347
	EN 61800-3:2001, second environment
	EN/IEC 50178
	IEC 61800-3, Ed 2
	IEC 60072-1
	EN/IEC 61800-3
	EN 61800-3 : 2001-02
Product Certifications	cUL
	TÜV
	UL
Ambient air temperature for	104131 °F (4055 °C) with power derating of 2 % per °C)
operation	32104 °F (040 °C) without derating)
Permissible ambient air	221 °F (105 °C) power amplifier
temperature around the device	230 °F (110 °C) motor
Ambient Air Temperature for Storage	-13158 °F (-2570 °C)
Operating altitude	<= 3280.84 ft (1000 m) without derating
Relative humidity	1585 % without condensation
Vibration resistance	20 m/s² 10500 Hz) 10 cycles EN/IEC 60068-2-6
Shock resistance	150 m/s² 1000 shocks EN/IEC 60068-2-29
IP degree of protection	IP41 shaft bushing: conforming to EN/IEC 60034-5
	IP54 total except shaft bushing: conforming to EN/IEC 60034-5

Ordering and shipping details

Category	US1PC5618288	
Discount Schedule	PC56	
GTIN	3606485204673	
Returnability	No	
Country of origin	DE	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.1 in (8.0 cm)
Package 1 Width	7.3 in (18.5 cm)
Package 1 Length	14.0 in (35.5 cm)
Package 1 Weight	3.7 lb(US) (1.7 kg)

Contractual warranty

Warranty 18 months

Sustainability Screen Premium*

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

Ø	Mercury Free	
	Rohs Exemption Information	Yes
	Pvc Free	


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Integrated Drive without Gearing


Dimensions

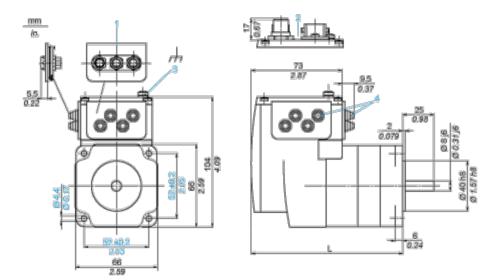

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries $\emptyset = 3 \dots 9 \text{ mm/0.12} \dots 0.35 \text{ in.}$
- L 122 mm/4.80 in.

Connections and Schema

Connection Example with 4 I/O Signals

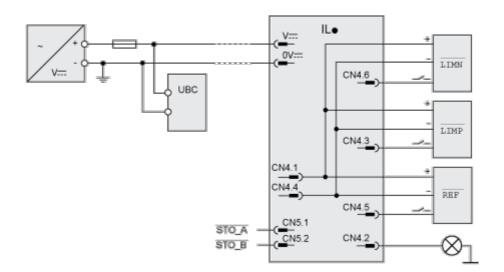


Product data sheet

ILE2K661PB1A0

Performance Curves

Torque Characteristics



- X Speed of rotation in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 48 V