# **Product datasheet**

Specifications





# brushless dc motor 24..48 V -Ethernet Powerlink interface-L=140mm- w/o gearbox

ILE2P662PB1A0

() Discontinued on: 15 Jun 2023

Discontinued - Service only

() To be end-of-service on: 31 Dec 2026

## Main

Range of product	Lexium integrated drive
Product or component type	Motion integrated drive
Device short name	ILE
Motor type	Brushless DC motor
Number of motor poles	6
Network number of phases	Single phase
[Us] rated supply voltage	48 V 24 V
network type	DC
Communication interface	Ethernet Powerlink, integrated
Length	140 mm
Winding type	Medium speed of rotation and medium torque
Electrical connection	Printed circuit board connector
Holding brake	Without
Gear box type	Without
Reduction ratio	1:1
Nominal speed	3100 rpm at 24 V 5000 rpm at 48 V
Nominal torque	0.5 N.m at 24 V 0.5 N.m at 48 V

## Complementary

Transmission rate	100 Mbits
mounting support	Flange
Motor flange size	66 mm
Number of motor stacks	2
Centring collar diameter	40 mm
Centring collar depth	2 mm
Number of mounting holes	4
Mounting holes diameter	4.4 mm
Circle diameter of the mounting holes	73.54 mm

Feedback type	BLDC encoder
Shaft end	Untapped
Second shaft	Without second shaft end
Shaft diameter	8 mm
Shaft length	25 mm
Supply voltage limits	1855.2 V
Current consumption	7000 mA peak 5500 mA maximum continuous
Associated fuse rating	16 A
Commissioning interface	RS485 Modbus TCP (9.6, 19.2 and 38.4 kbauds)
Input/output type	4 signals (each be used as input or output)
Voltage state 0 guaranteed	-34.5 V
Voltage state 1 guaranteed	1530 V
Discrete input current	10 mA at 24 V on/STO_A for safety input 3 mA at 24 V on/STO_B for safety input 2 mA at 24 V for 24 V signal interface
Discrete output voltage	2325 V
Maximum switching current	100 mA per output 200 mA total
Protection type	Safe torque off Overload of output voltage Short circuit of the output voltage
Maximum supply current	0.1 A (power stage disabled) 7 A at 48 V 9.5 A at 24 V
Nominal output power	162 W at 24 V 262 W at 48 V
Peak stall torque	0.8 N.m at 24 V 0.8 N.m at 48 V
Continuous stall torque	0.54 N.m
Detent torque	0.106 N.m
Speed feedback resolution	12 points/turn
Accuracy error	+/- 0.5 °
Rotor inertia	0.34 kg.cm <sup>2</sup>
Maximum mechanical speed	5000 rpm 7000 rpm
Maximum radial force Fr	80 N
Maximum axial force Fa	30 N (force pressure) 30 N (tensile force)
Service life in hours	20000 h bearing
marking	CE
Type of cooling	Natural convection
Net weight	1.75 kg

# Environment

Standards	EN/IEC 61800-3 IEC 60072-1 EN 61800-3:2001, second environment EN 61800-3 : 2001-02 EN/IEC 50178 IEC 61800-3, Ed 2 EN 50347
Product certifications	UL cUL TÜV
Ambient air temperature for operation	4055 °C (with power derating of 2 % per °C) 040 °C (without derating)
Permissible ambient air temperature around the device	105 °C power amplifier 110 °C motor
Ambient air temperature for storage	-2570 °C
Operating altitude	<= 1000 m without derating
Relative humidity	1585 % without condensation
Vibration resistance	20 m/s² (f= 10500 Hz) 10 cycles conforming to EN/IEC 60068-2-6
Shock resistance	150 m/s <sup>2</sup> 1000 shocks conforming to EN/IEC 60068-2-29
IP degree of protection	IP41 shaft bushing: conforming to EN/IEC 60034-5 IP54 total except shaft bushing: conforming to EN/IEC 60034-5

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	18.5 cm
Package 1 Length	35.5 cm
Package 1 Weight	1.95 kg

# **Contractual warranty**

Warranty

18 months

# Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

## Well-being performance



## **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

## **Product datasheet**

### **Dimensions Drawings**

#### Integrated Drive without Gearing


#### Dimensions

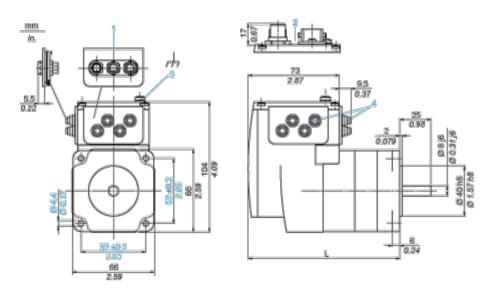

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries  $\emptyset = 3 \dots 9 \text{ mm/0.12} \dots 0.35 \text{ in.}$
- L 140 mm/4.80 in.


Connections and Schema

### Connection Example with 4 I/O Signals

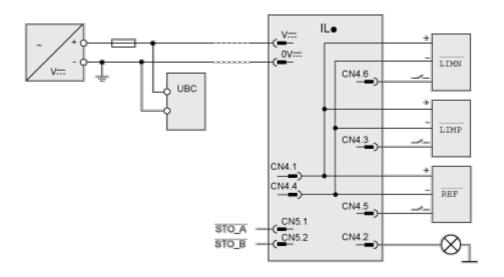

#### Performance Curves

#### **Torque Characteristics**



- X Speed of rotation in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 48 V