



(!) Discontinued

integrated drive ILS with stepper motor - 24..36 V - Profibus DP - 5 A

ILS1B851PB1F0

! Discontinued on: 31 Dec 2022

! To be end-of-service on: 31 Dec 2026

Main

Range of product	Lexium integrated drive	
Product or component type	Motion integrated drive	
Device short name	ILS	
Motor type	3-phase stepper motor	
Number of motor poles	6	
Network number of phases	Single phase	
[Us] rated supply voltage	36 V 24 V	
network type	DC	
Communication interface	Profibus DP, integrated	
Length	187.3 mm	
Winding type	Medium speed of rotation and medium torque	
Electrical connection	Printed circuit board connector	
Holding brake	With	
Gear box type	Without	
Nominal speed	200 rpm at 24 V 400 rpm at 36 V	
Nominal torque	2 N.m	
Holding torque	6 N.m holding brake 2 N.m	

Complementary

Transmission rate	9.6, 19.2, 45.45, 93.75, 187.5, 500, 1500, 3000, 6000 and 12000 kbauds	
mounting support	Flange 85 mm	
Motor flange size	85 mm	
Number of motor stacks	1	
Centring collar diameter	60 mm	
Centring collar depth	2 mm	
Number of mounting holes	4	
Mounting holes diameter	6.5 mm	
Circle diameter of the mounting holes	99 mm	

-		
Feedback type	Index pulse	
Shaft end	Untapped	
Second shaft	Without second shaft end	
Shaft diameter	12 mm	
Shaft length	30 mm	
Supply voltage limits	1840 V	
Current consumption	5000 mA maximum	
Associated fuse rating	10 A	
Input/output type	4 signals (each be used as input or output)	
Voltage state 0 guaranteed	-34.5 V	
Voltage state 1 guaranteed	1530 V	
Discrete input current	10 mA at 24 V on/STO_A for safety input 3 mA at 24 V on/STO_B for safety input 2 mA at 24 V for 24 V signal interface	
Discrete output voltage	2325 V	
Maximum switching current	100 mA per output 200 mA total	
Protection type	Safe torque off Short circuit of the output voltage Overload of output voltage	
Peak stall torque	2 N.m	
Continuous stall torque	2 N.m	
Speed feedback resolution	20000 points/turn	
Accuracy error	+/- 6 arc min	
Rotor inertia	1.3 kg.cm²	
Maximum mechanical speed	2000 rpm	
Maximum radial force Fr	100 N	
Maximum axial force Fa	170 N (tensile force) 30 N (force pressure)	
Service life in hours	20000 h bearing	
Brake pull-in power	22 W	
Brake release time	40 ms	
Brake application time	20 ms	
marking	CE	
Type of cooling	Natural convection	

Environment

Standards	EN 61800-3 : 2001-02		
	EN/IEC 50178		
	EN 50347		
	EN 61800-3:2001, second environment		
	EN/IEC 61800-3		
	IEC 61800-3, Ed 2		
	IEC 60072-1		
Product certifications	cUL		
	UL		
	TÜV		

Ambient air temperature for operation	5065 °C (with power derating of 2 % per °C) 050 °C (without derating)	
Permissible ambient air temperature around the device	105 °C power amplifier 110 °C motor	
Ambient air temperature for storage	-2570 °C	
Operating altitude	<= 1000 m without derating	
Relative humidity	1585 % without condensation	
Vibration resistance	20 m/s² (f= 10500 Hz) 10 cycles conforming to EN/IEC 60068-2-6	
Shock resistance	150 m/s² 1000 shocks conforming to EN/IEC 60068-2-29	
IP degree of protection	IP41 shaft bushing: conforming to EN/IEC 60034-5 IP54 total except shaft bushing: conforming to EN/IEC 60034-5	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	22 cm
Package 1 Width	19.5 cm
Package 1 Length	40 cm
Package 1 Weight	5.382 kg
Unit Type of Package 2	S06
Number of Units in Package 2	9
Package 2 Height	73.5 cm
Package 2 Width	60 cm
Package 2 Length	80 cm
Package 2 Weight	43.6 kg
Package 3 Height	73.5 cm

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

	Mercury Free	
②	Rohs Exemption Information	Yes
	Pvc Free	

Certifications & Standards


Circularity Profile	End of Life Information
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Environmental Disclosure	Product Environmental Profile
China Rohs Regulation	China RoHS declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Reach Regulation	REACh Declaration

19 Aug 2024

Dimensions Drawings

Integrated Drive with Holding Brake


Dimensions

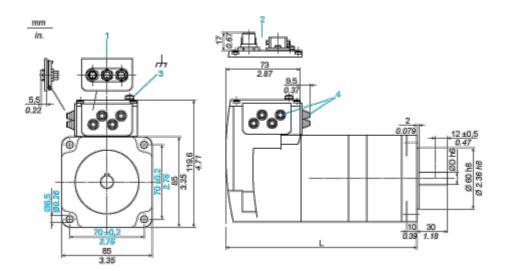

- 1 Accessories: I/O signal insert with industrial connectors
- 2 Option: industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries $\emptyset = 3 \dots 9 \text{ mm/0.12} \dots 0.35 \text{ in.}$
- L 187.3 mm/7.37 in.
- D 12 mm/0.47 in.

Connections and Schema

Connection Example with 4 I/O Signals

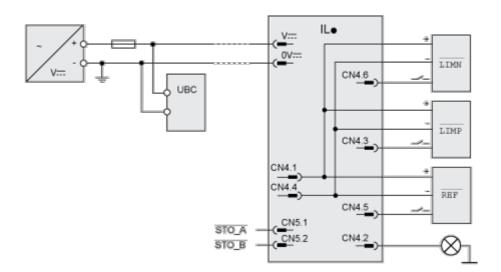


Product datasheet

ILS1B851PB1F0

Performance Curves

Torque Characteristics



- X Speed of rotation in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 36 V