

ø16 LB Series Selector Switches

Selector Switches

Solder/Tab Terminal

Package Quantity: 1

Part No. / Shape	LB ① S -②③ T ④⑤								
	Knob Operator			Lever Operator					
	Round	Square	Rectangular	Round	Square	Rectangular			
② Operator Position			③ Contact		Part No.				
					Gold Contact		Silver Contact		
90° 2-position	Maintained			SPDT	LB ① S -2 T 1	LB ① S -2 T 5			
				DPDT	LB ① S -2 T 2	LB ① S -2 T 6			
				3PDT	LB ① S -2 T 3	LB ① S -2 T 7			
45° 3-position	Maintained			DPDT	LB ① S -3 T 2	LB ① S -3 T 6			
				3PDT	LB ① S -3 T 3	LB ① S -3 T 7			
	Spring return two-way			DPDT	LB ① S -3 T 2	LB ① S -3 T 6			
				3PDT	LB ① S -3 T 3	LB ① S -3 T 7			

- Lever operators also available. To specify, see Part Number Development below.
- PC board terminals available for gold contacts. To specify, see Part Number Development below.
- 2-position spring return from right, 3-position spring return from right, 3-position spring return from left also available. To specify, see Part Number Development below.
- For contact operation, see page 48.

Part Number Development

LB

①**S**-②③**T**④⑤

① Shape

Code	Shape
1	Round
2	Square
3	Rectangular

② Operator Position

2-position	
Operator Position	
2 Maintained	21 Spring return from right

3-position

Operator Position			
3 Maintained	31 Spring return from right	32 Spring return from left	33 Spring return two-way

③ Operator

Code	Operator Shape
Blank	Knob
L	Lever

④ Contacts


Code	Contact
1	Gold/SPDT (90° 2-position only)
2	Gold/DPDT
3	Gold/3PDT
5	Silver/SPDT (90° 2-position only)
6	Silver/DPDT
7	Silver/3PDT

⑤ Others

Code	Specification	Part No. Example
Blank	Solder/Tab Terminal	—
V	PC Board Terminal (Gold Contact Only)	LB1S-2T1V

Flush Silhouette LB Series
Flush Silhouette LBW Series
ø16 LB Series
UP Series

Dimensions

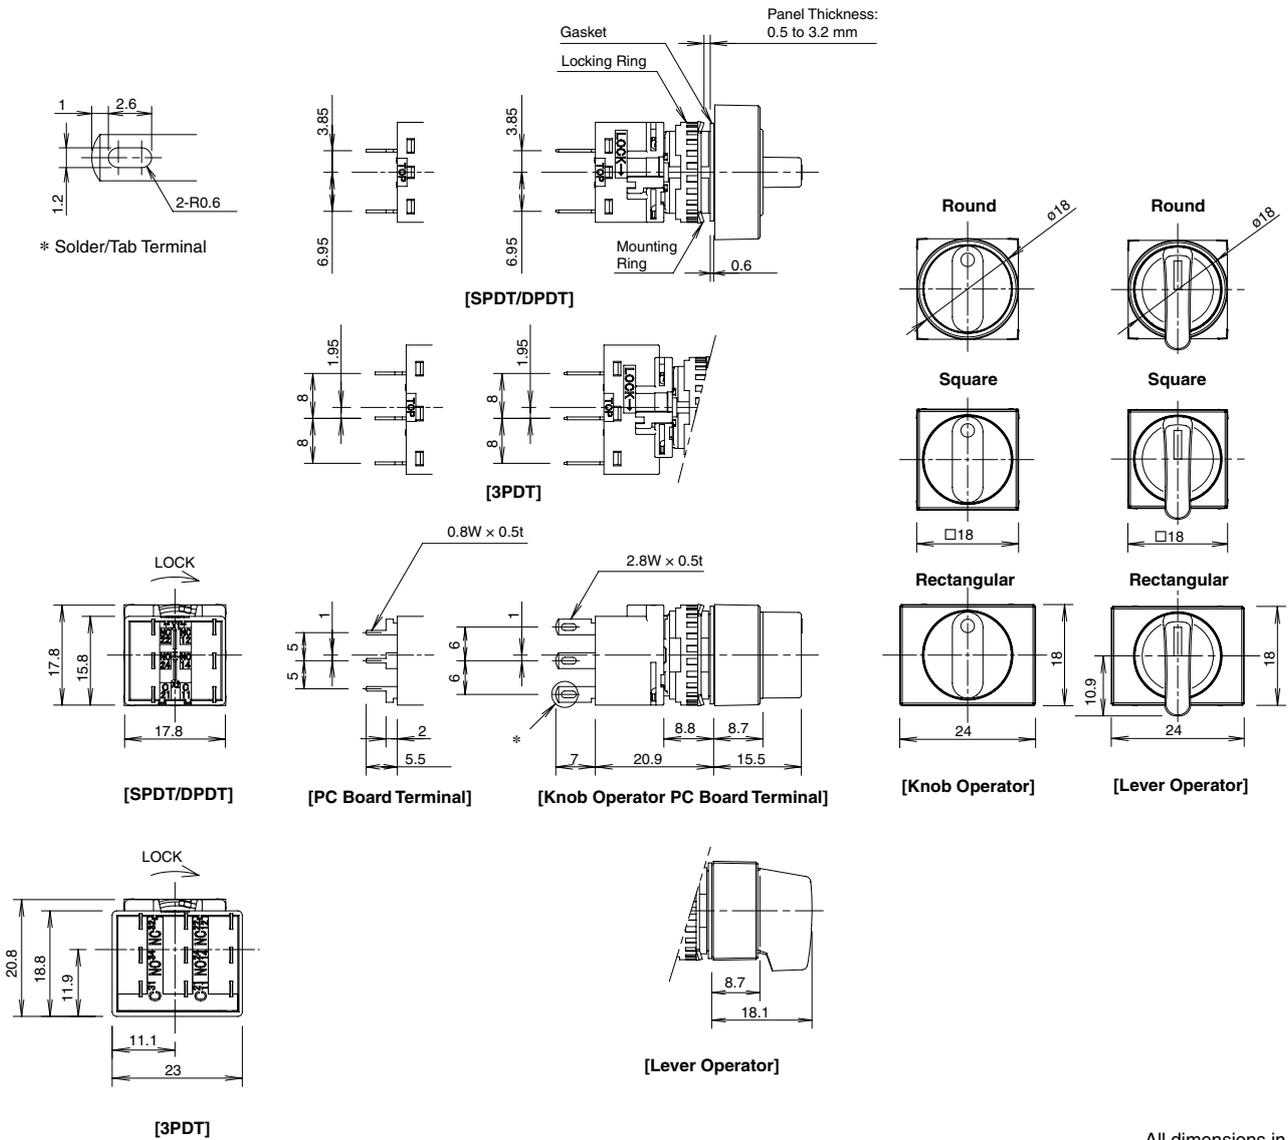


Illuminated Pushbutton
Pilot Light
Pushbutton
Selector
Illuminated Selector
Key Selector
Lever Switch
Buzzer
Accessories
Maintenance Parts
Panel Cut-out
Instructions


All dimensions in mm.

Terminal Arrangement (Bottom View)

SPDT/DPDT Contacts




3PDT Contacts



Mounting Hole Layout

Round (LB1/LB2/LB3/LB4)



*1: 24 mm for rectangular units, 23.2 mm for 3PDT

*2: 21 mm for 3PDT

Note: When using terminal cover, see dimensions on page 58.

- For details on pc board and circuit design, see page 50.
- For details on single board mounting, see page 51.