

Product data sheet

Specifications



IEC contactor, TeSys Deca, nonreversing, 95A, 60HP at 480VAC, 3 phase, 3 pole, 3 NO, 24VDC coil, open style

LC1D95BD

Product availability: Stock - Normally stocked in distribution facility

Price*: 526.00 USD

Main

Range	TeSys
Range Of Product	TeSys Deca
Product Or Component Type	Contactor
Device Short Name	LC1D
Contactor Application	Resistive load Motor control
Utilisation Category	AC-3 AC-3e AC-4 AC-1
Poles Description	3P
[Ue] Rated Operational Voltage	Power circuit <= 690 V AC 25...400 Hz
[Ie] Rated Operational Current	95 A (at <140 °F (60 °C)) at <= 440 V AC-3 for power circuit 125 A (at <140 °F (60 °C)) at <= 690 V AC-1 for power circuit 95 A (at <140 °F (60 °C)) at <= 440 V AC-3e for power circuit
[Uc] Control Circuit Voltage	24 V DC

Complementary

Motor Power Kw	25 kW at 220...230 V AC 50 Hz (AC-3) 45 kW at 380...400 V AC 50 Hz (AC-3) 45 kW at 415...440 V AC 50 Hz (AC-3) 55 kW at 500 V AC 50 Hz (AC-3) 45 kW at 660...690 V AC 50 Hz (AC-3) 15 kW at 400 V AC 50 Hz (AC-4) 25 kW at 220...230 V AC 50 Hz (AC-3e) 45 kW at 380...400 V AC 50 Hz (AC-3e) 45 kW at 415...440 V AC 50 Hz (AC-3e) 55 kW at 500 V AC 50 Hz (AC-3e) 45 kW at 660...690 V AC 50 Hz (AC-3e)
Maximum Horse Power Rating	7.5 hp at 120 V AC 60 Hz for 1 phase motors 15 hp at 230/240 V AC 60 Hz for 1 phase motors 30 hp at 200/208 V AC 60 Hz for 3 phase motors 30 hp at 230/240 V AC 60 Hz for 3 phase motors 60 hp at 460/480 V AC 60 Hz for 3 phase motors 60 hp at 575/600 V AC 60 Hz for 3 phase motors
Compatibility Code	LC1D
Pole Contact Composition	3 NO
Protective Cover	With
[Ith] Conventional Free Air Thermal Current	10 A (at 140 °F (60 °C)) for signalling circuit 125 A (at 140 °F (60 °C)) for power circuit

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Irms Rated Making Capacity	1100 A at 440 V AC for power circuit conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated Breaking Capacity	1100 A at 440 V for power circuit conforming to IEC 60947
[Icw] Rated Short-Time Withstand Current	1100 A 104 °F (40 °C) - 1 s for power circuit 800 A 104 °F (40 °C) - 10 s for power circuit 400 A 104 °F (40 °C) - 1 min for power circuit 135 A 104 °F (40 °C) - 10 min for power circuit 140 A - 100 ms for signalling circuit 120 A - 500 ms for signalling circuit 100 A - 1 s for signalling circuit
Associated Fuse Rating	10 A gG for signalling circuit conforming to IEC 60947-5-1 200 A gG at <= 690 V coordination type 1 for power circuit 160 A gG at <= 690 V coordination type 2 for power circuit
Average Impedance	0.8 mOhm - Ith 125 A 50 Hz for power circuit
Power Dissipation Per Pole	12.5 W AC-1 7.2 W AC-3 7.2 W AC-3e
[Ui] Rated Insulation Voltage	Power circuit 1000 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-1
Overvoltage Category	III
Pollution Degree	3
[Uimp] Rated Impulse Withstand Voltage	8 kV IEC 60947
Safety Reliability Level	B10d = 1.3 Mcycles contactor with nominal load EN/ISO 13849-1 B10d = 20 Mcycles contactor with mechanical load EN/ISO 13849-1
Mechanical Durability	10 Mcycles
Electrical Durability	1.2 Mcycles 95 A AC-3 1.3 Mcycles 125 A AC-1 1.2 Mcycles 95 A AC-3e
Control Circuit Type	DC standard
Coil Technology	Without built-in suppressor module
Control Circuit Voltage Limits	0.1...0.3 Uc -40...158 °F (-40...70 °C) drop-out DC 0.85...1.1 Uc -40...131 °F (-40...55 °C) operational DC 1...1.1 Uc 131...158 °F (55...70 °C) operational DC
Inrush Power In W	22 W 68 °F (20 °C))
Hold-In Power Consumption In W	22 W 68 °F (20 °C)
Operating Time	95...130 ms closing 20...35 ms opening
Time Constant	75 ms
Maximum Operating Rate	3600 cyc/h 140 °F (60 °C)

Connections - Terminals	Control circuit: screw clamp terminals 2.00...0.00 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1.00...0.00 in ² (1...2.5 mm ²) - cable stiffness: flexible with cable end Control circuit: screw clamp terminals 1.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 2.00...0.01 in ² (1...4 mm ²) - cable stiffness: flexible without cable end Control circuit: screw clamp terminals 1.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end Control circuit: screw clamp terminals 2.00...0.01 in ² (1...4 mm ²) - cable stiffness: solid without cable end Power circuit: connector 1.01...0.08 in ² (4...50 mm ²) - cable stiffness: flexible without cable end Power circuit: connector 2.01...0.04 in ² (4...25 mm ²) - cable stiffness: flexible without cable end Power circuit: connector 1.01...0.08 in ² (4...50 mm ²) - cable stiffness: flexible with cable end Power circuit: connector 2.01...0.02 in ² (4...16 mm ²) - cable stiffness: flexible with cable end Power circuit: connector 1.01...0.08 in ² (4...50 mm ²) - cable stiffness: solid without cable end Power circuit: connector 2.01...0.04 in ² (4...25 mm ²) - cable stiffness: solid without cable end
Tightening Torque	Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals flat Ø 6 mm Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals Philips No 2 Power circuit 106.21 lbf.in (12 N.m) connector flat Ø 6 to Ø 8 mm Power circuit 106.21 lbf.in (12 N.m) connector hexagonal 0.16 in (4 mm) Control circuit 10.62 lbf.in (1.2 N.m) screw clamp terminals pozidriv No 2
Auxiliary Contact Composition	1 NO + 1 NC
Auxiliary Contacts Type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
Signalling Circuit Frequency	25...400 Hz
Minimum Switching Voltage	17 V for signalling circuit
Minimum Switching Current	5 mA for signalling circuit
Insulation Resistance	> 10 MΩ for signalling circuit
Non-Overlap Time	1.5 ms on de-energisation between NC and NO contact 1.5 ms on energisation between NC and NO contact
Mounting Support	Rail Plate

Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-4-1 EN/IEC 60947-5-1 GB/T 14048.4
Product Certifications	IECEE CB Scheme CCC EAC LROS (Lloyds register of shipping) RINA BV DNV-GL
IP Degree Of Protection	IP20 front face IEC 60529
Protective Treatment	THIEC 60068-2-30
Climatic Withstand	IACS E10 exposure to damp heat
Permissible Ambient Air Temperature Around The Device	-40...140 °F (-40...60 °C) 140...158 °F (60...70 °C) with derating
Operating Altitude	0...9842.52 ft (0...3000 m)
Fire Resistance	1562 °F (850 °C) IEC 60695-2-1
Flame Retardance	V1 conforming to UL 94

Mechanical Robustness	Vibrations contactor open 2 Gn, 5...300 Hz) Shocks contactor open 8 Gn for 11 ms) Vibrations contactor closed 3 Gn, 5...300 Hz) Shocks contactor closed 10 Gn for 11 ms)
Height	5.00 in (127 mm)
Width	3.35 in (85 mm)
Depth	7.32 in (186 mm)
Net Weight	5.75 lb(US) (2.61 kg)

Ordering and shipping details

Category	US10I1222359
Discount Schedule	0I12
Gtin	3389110450576
Returnability	Yes
Country Of Origin	CZ

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.33 in (11.000 cm)
Package 1 Width	6.42 in (16.300 cm)
Package 1 Length	8.54 in (21.700 cm)
Package 1 Weight	5.66 lb(US) (2.566 kg)
Unit Type Of Package 2	S02
Number Of Units In Package 2	2
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	12.00 lb(US) (5.445 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	32
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	215.82 lb(US) (97.892 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Reach Free Of Svhc

 Toxic Heavy Metal Free

 Mercury Free

 RoHS Exemption Information Yes

 Pvc Free

Certifications & Standards

Reach Regulation

[REACH Declaration](#)

Eu RoHS Directive

Compliant

[EU RoHS Declaration](#)

China RoHS Regulation

[China RoHS declaration](#)

Pro-active China RoHS declaration (out of China RoHS legal scope)

Environmental Disclosure

[Product Environmental Profile](#)

Weee

The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Circularity Profile


No need of specific recycling operations

California Proposition 65

WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](#)

Dimensions Drawings

Dimensions

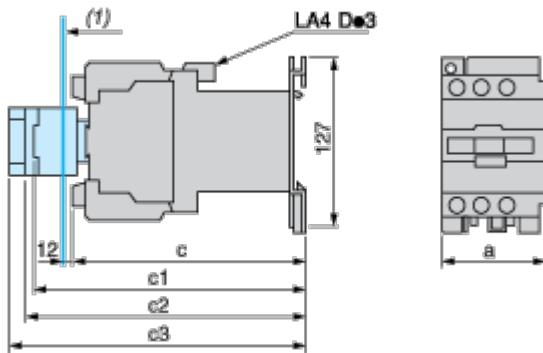

(1) Minimum electrical clearance

LC1		D80 and D95
a		85
b1	with LAD 4BB3	–
	with LA4 DF, DT	–
c	without cover or add-on blocks	181
	with cover, without add-on blocks	186
c1	with LAD N (1 contact)	204
	with LAD N or C (2 or 4 contacts)	210
c2	with LA6 DK10	221
c3	with LAD T, R, S	229
	with LAD T, R, S and sealing cover	233

Connections and Schema

Wiring