# Product datasheet

Specifications

Green Premium™

## REVERSING CONTACTOR 575VAC 25A IEC

Local distributor code:

381823278 LC2D25F7

**EAN Code: 3389110386813**

## Main

| | |
|---|---|
| **Range** | TeSys<br>TeSys Deca |
| **Product Name** | TeSys Deca<br>TeSys Deca |
| **Product Or Component Type** | Reversing contactor |
| **Device Short Name** | LC2D |
| **Contactor Application** | Resistive load<br>Motor control |
| **Utilisation Category** | AC-1<br>AC-3<br>AC-3e |
| **Device Presentation** | Preassembled with reversing power busbar |
| **Poles Description** | 3P |
| **Power Pole Contact Composition** | 3 NO |
| **[Ue] Rated Operational Voltage** | Power circuit: <= 690 V AC 25...400 Hz<br>Power circuit: <= 300 V DC |
| **[Ie] Rated Operational Current** | 25 A (at <60 °C) at <= 440 V AC AC-3 for power circuit<br>40 A (at <60 °C) at <= 440 V AC AC-1 for power circuit |
| **Motor Power Kw** | 5.5 kW at 220...230 V AC 50...60 Hz<br>11 kW at 380...400 V AC 50...60 Hz<br>11 kW at 415 V AC 50...60 Hz<br>11 kW at 440 V AC 50...60 Hz<br>15 kW at 500 V AC 50...60 Hz<br>15 kW at 660...690 V AC 50...60 Hz |
| **Motor Power Hp (Ul / Csa)** | 3 hp at 230/240 V AC 60 Hz for 1 phase motors<br>5 hp at 200/208 V AC 60 Hz for 3 phases motors<br>2 hp at 115 V AC 60 Hz for 1 phase motors<br>7.5 hp at 230/240 V AC 60 Hz for 3 phases motors<br>15 hp at 460/480 V AC 60 Hz for 3 phases motors<br>20 hp at 575/600 V AC 60 Hz for 3 phases motors |
| **Control Circuit Type** | AC at 50/60 Hz |
| **[Uc] Control Circuit Voltage** | 110 V AC 50/60 Hz |
| **Auxiliary Contact Composition** | 1 NO + 1 NC |
| **[Uimp] Rated Impulse Withstand Voltage** | 6 kV conforming to IEC 60947 |
| **Overvoltage Category** | III |
| **[Ith] Conventional Free Air Thermal Current** | 10 A (at 60 °C) for signalling circuit<br>40 A (at 60 °C) for power circuit |
| **Irms Rated Making Capacity** | 140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1<br>450 A at 440 V for power circuit conforming to IEC 60947 |
| **Rated Breaking Capacity** | 450 A at 440 V for power circuit conforming to IEC 60947 |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **[Icw] Rated Short-Time Withstand Current** | 50 A 40 °C - 10 min for power circuit<br>120 A 40 °C - 1 min for power circuit<br>240 A 40 °C - 10 s for power circuit<br>380 A 40 °C - 1 s for power circuit<br>100 A - 1 s for signalling circuit<br>120 A - 500 ms for signalling circuit<br>140 A - 100 ms for signalling circuit |
| **Associated Fuse Rating** | 10 A gG for signalling circuit conforming to IEC 60947-5-1<br>63 A gG at <= 690 V coordination type 1 for power circuit<br>40 A gG at <= 690 V coordination type 2 for power circuit |
| **Average Impedance** | 2 mOhm - Ith 40 A 50 Hz for power circuit |
| **[Ui] Rated Insulation Voltage** | Power circuit: 690 V conforming to IEC 60947-4-1<br>Power circuit: 600 V CSA certified<br>Power circuit: 600 V UL certified<br>Signalling circuit: 690 V conforming to IEC 60947-1<br>Signalling circuit: 600 V CSA certified<br>Signalling circuit: 600 V UL certified |
| **Electrical Durability** | 1.65 Mcycles 25 A AC-3 at Ue <= 440 V<br>1.4 Mcycles 40 A AC-1 at Ue <= 440 V<br>1.65 Mcycles 25 A AC-3e at Ue <= 440 V |
| **Power Dissipation Per Pole** | 1.25 W AC-3<br>3.2 W AC-1<br>1.25 W AC-3e |
| **Front Cover** | With |
| **Interlocking Type** | Mechanical |
| **Mounting Support** | Rail<br>Plate |
| **Standards** | CSA C22.2 No 14<br>EN 60947-4-1<br>EN 60947-5-1<br>IEC 60947-4-1<br>IEC 60947-5-1<br>UL 508<br>IEC 60335-1 |
| **Product Certifications** | DNV<br>CSA<br>CCC<br>UL<br>GL<br>LROS (Lloyds register of shipping)<br>BV<br>RINA<br>GOST<br>UKCA<br>CB |
| **Connections - Terminals** | Control circuit: screw clamp terminals 1 cable(s) 1…4 mm²flexible without cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1…4 mm²flexible without cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1…4 mm²flexible with cable end<br>Control circuit: screw clamp terminals 2 cable(s) 1…2.5 mm²flexible with cable end<br>Control circuit: screw clamp terminals 1 cable(s) 1…4 mm²solid<br>Control circuit: screw clamp terminals 2 cable(s) 1…4 mm²solid<br>Power circuit: screw clamp terminals 1 cable(s) 2.5…10 mm²flexible without cable end<br>Power circuit: screw clamp terminals 2 cable(s) 2.5…10 mm²flexible without cable end<br>Power circuit: screw clamp terminals 1 cable(s) 1…10 mm²flexible with cable end<br>Power circuit: screw clamp terminals 2 cable(s) 1.5…6 mm²flexible with cable end<br>Power circuit: screw clamp terminals 1 cable(s) 1.5…10 mm²solid<br>Power circuit: screw clamp terminals 2 cable(s) 2.5…10 mm²solid |
| **Tightening Torque** | Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver Philips No 2<br>Control circuit: 1.7 N.m - on screw clamp terminals - with screwdriver pozidriv No 2<br>Power circuit: 2.5 N.m - on screw clamp terminals - with screwdriver pozidriv No 2 |
| **Operating Time** | 12...22 ms closing<br>4...19 ms opening |

| | |
|---|---|
| **Safety Reliability Level** | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1 |
| **Mechanical Durability** | 15 Mcycles |
| **Maximum Operating Rate** | 3600 cyc/h 60 °C |

## Complementary

| | |
|---|---|
| **Coil Technology** | Without built-in suppressor module |
| **Control Circuit Voltage Limits** | 0.3...0.6 Uc (-40…70 °C):drop-out AC 50/60 Hz<br>0.8...1.1 Uc (-40…60 °C):operational AC 50 Hz<br>0.85...1.1 Uc (-40…60 °C):operational AC 60 Hz<br>1...1.1 Uc (60…70 °C):operational AC 50/60 Hz |
| **Inrush Power In Va** | 70 VA 60 Hz cos phi 0.75 (at 20 °C)<br>70 VA 50 Hz cos phi 0.75 (at 20 °C) |
| **Hold-In Power Consumption In Va** | 7.5 VA 60 Hz cos phi 0.3 (at 20 °C)<br>7 VA 50 Hz cos phi 0.3 (at 20 °C) |
| **Heat Dissipation** | 2…3 W at 50/60 Hz |
| **Auxiliary Contacts Type** | type mechanically linked 1 NO + 1 NC conforming to IEC 60947-5-1<br>type mirror contact 1 NC conforming to IEC 60947-4-1 |
| **Signalling Circuit Frequency** | 25...400 Hz |
| **Minimum Switching Current** | 5 mA for signalling circuit |
| **Minimum Switching Voltage** | 17 V for signalling circuit |
| **Non-Overlap Time** | 1.5 ms on de-energisation between NC and NO contact<br>1.5 ms on energisation between NC and NO contact |
| **Insulation Resistance** | > 10 MOhm for signalling circuit |

## Environment

| | |
|---|---|
| **Ip Degree Of Protection** | IP20 front face conforming to IEC 60529 |
| **Climatic Withstand** | conforming to IACS E10<br>conforming to IEC 60947-1 Annex Q category D |
| **Protective Treatment** | TH conforming to IEC 60068-2-30 |
| **Pollution Degree** | 3 |
| **Ambient Air Temperature For Operation** | -40…60 °C<br>60…70 °C with derating |
| **Ambient Air Temperature For Storage** | -60…80 °C |
| **Operating Altitude** | 0...3000 m |
| **Fire Resistance** | 850 °C conforming to IEC 60695-2-1 |
| **Flame Retardance** | V1 conforming to UL 94 |
| **Mechanical Robustness** | Vibrations contactor open: 2 Gn, 5...300 Hz<br>Vibrations contactor closed: 4 Gn, 5...300 Hz<br>Shocks contactor closed: 15 Gn for 11 ms<br>Shocks contactor open: 8 Gn for 11 ms |
| **Height** | 85 mm |
| **Width** | 90 mm |
| **Depth** | 92 mm |
| **Net Weight** | 0.787 kg |

## Packing Units

| | |
|---|---|
| **Unit Type Of Package 1** | PCE |
| **Number Of Units In Package 1** | 1 |
| **Package 1 Height** | 14.000 cm |
| **Package 1 Width** | 11.400 cm |
| **Package 1 Length** | 11.400 cm |
| **Package 1 Weight** | 940.000 g |
| **Unit Type Of Package 2** | S02 |
| **Number Of Units In Package 2** | 5 |
| **Package 2 Height** | 15.000 cm |
| **Package 2 Width** | 30.000 cm |
| **Package 2 Length** | 40.000 cm |
| **Package 2 Weight** | 5.107 kg |

## Contractual warranty

| | |
|---|---|
| **Warranty** | 18 months |

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-$CO_2$ products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Transparency RoHS/REACh

## Well-being performance

- Reach Free Of Svhc
- Pvc Free

## Certifications & Standards

| | |
|---|---|
| **Reach Regulation** | REACh Declaration |
| **Eu Rohs Directive** | Compliant<br>EU RoHS Declaration |
| **China Rohs Regulation** | China RoHS declaration<br>Pro-active China RoHS declaration (out of China RoHS legal scope) |
| **Environmental Disclosure** | Product Environmental Profile |
| **Weee** | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| **Circularity Profile** | End of Life Information |

## Dimensions Drawings

### Dimensions

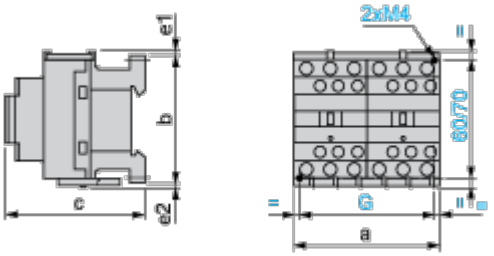


| LC2 or 2 x LC1 | a | b | c(1) | e1 | e2 | G |
|---|---|---|---|---|---|---|
| **D09 to D18 (AC)** | 90 | 77 | 86 | 4 | 1.5 | 80 |
| **D093 to D123 (AC)** | 90 | 99 | 86 | – | – | 80 |
| **D09 to D18 (DC)** | 90 | 77 | 95 | 4 | 1.5 | 80 |
| **D093 to D123 (DC)** | 90 | 99 | 95 | – | – | 80 |
| **D25 to D38 (AC)** | 90 | 85 | 92 | 9 | 5 | 80 |
| **D183 to D383 (AC)** | 90 | 99 | 92 | – | – | 80 |
| **D25 to D32 (DC)** | 90 | 85 | 101 | 9 | 5 | 80 |
| **D183 to D383 (DC)** | 90 | 99 | 101 | – | – | 80 |
| **e1 and e2:** including cabling. | | | | | | |
| **(1)** With safety cover, without add-on block. | | | | | | |

Connections and Schema
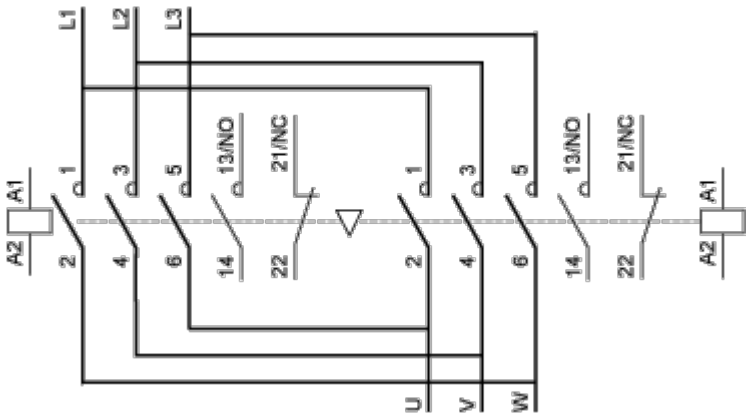
**Wiring**