



Fixing/reject bracket for plug-in relay RT series and PT screw terminals
logical and PT spring-loaded terminal socket logical disconnection

General technical data	
display version LED	No
design of the switching function positively driven	No
reference code according to IEC 81346-2	U
Substance Prohibitation (Date)	05/01/2012
product component plug-in socket	No
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Connections/ Terminals	
product function removable terminal	No
Installation/ mounting/ dimensions	
mounting position	any
height	37.8 mm
width	27 mm
depth	54.2 mm
Ambient conditions	
ambient temperature	
• during storage	-25 ... +70 °C
• during transport	-25 ... +70 °C
Certificates/ approvals	
General Product Approval	other

[Confirmation](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT17021>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT17021>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT17021>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT17021&lang=en

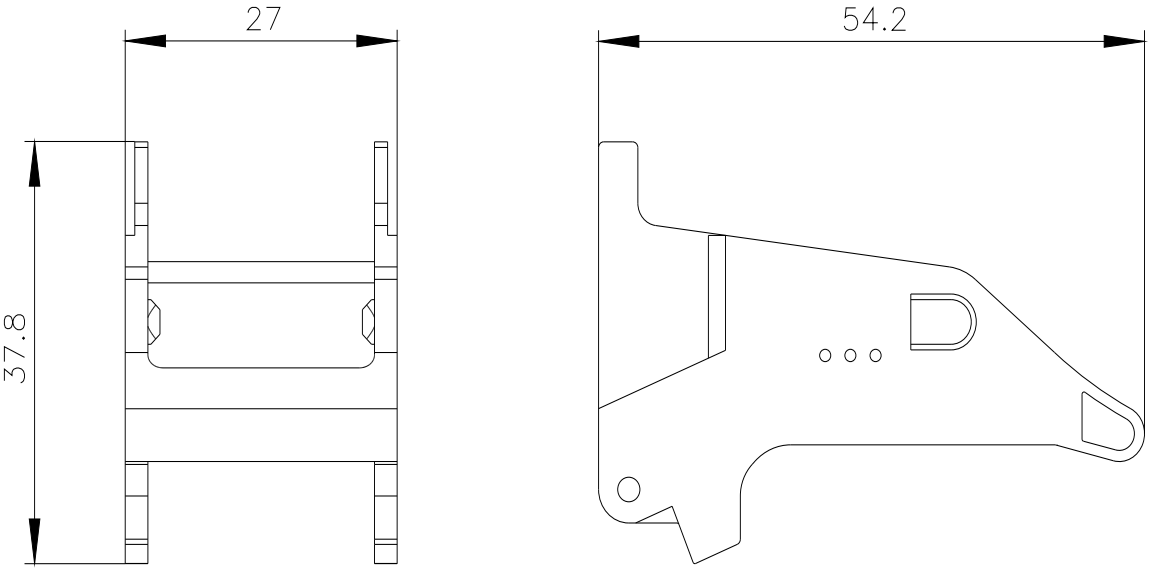

last modified: 12/23/2020 