


Breaker VLmax. FLEX HDL 3R STL DMG BLACK

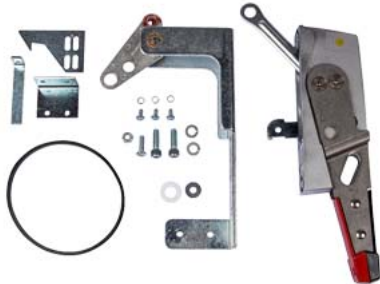

Model			
product brand name		SENTRON	
Mechanical Design			
net weight		1.56 kg	
General Product Approval		EMC	Declaration of Conformity

[Miscellaneous](#)

[Confirmation](#)



Declaration of Conformity	Test Certificates	Marine / Shipping			
 EG-Konf.	Special Test Certificate	 BUREAU VERITAS	 PRS	 RINA	 RMRS
other	Environment				

[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>


Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL9600-3JP61>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VL9600-3JP61>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL9600-3JP61
CAx-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

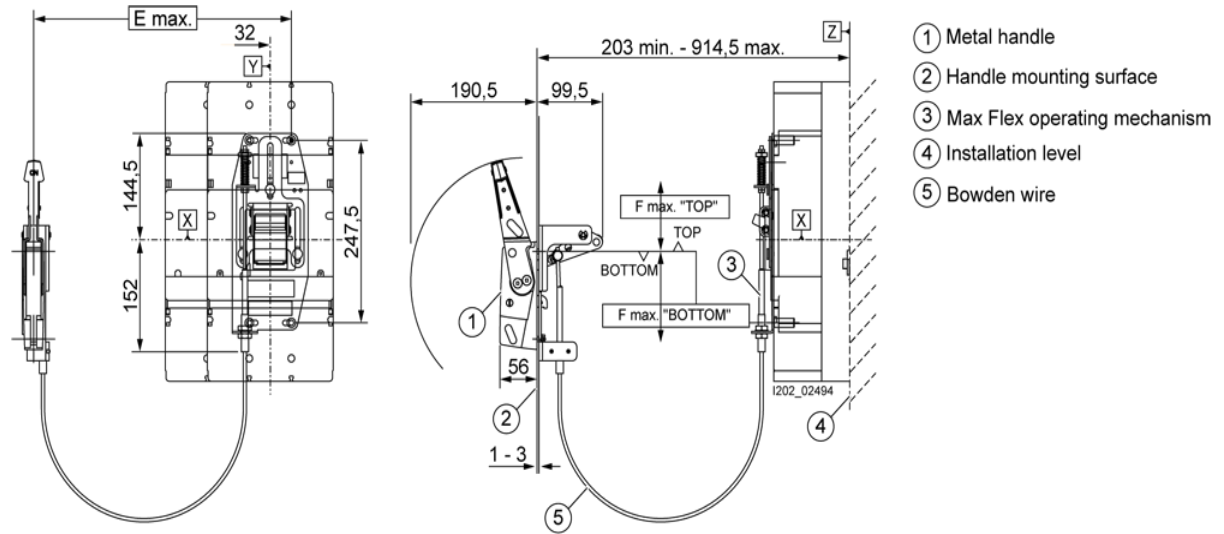

E max.			F max.				
Cabinet depth mm	3VL9600-3JQ31 length 900 mm	3VL9600-3JQ41 length 1200 mm	Cabinet depth mm	3VL9600-3JQ31 Length 900 mm		3VL9600-3JQ41 Length 1200 mm	
				TOP	BOTTOM	TOP	BOTTOM
203	10,7	22,7	203	106,5	393,5	406,5	686
254	10,5	22,6	254	132	381	419	686
305	10	22,3	305	152,5	373,5	432	680
406,5	7,9	21,3	406,5	114,5	360,5	419	673
457	6,1	20,5	457	86,5	325	406,5	647,5
508	3,2	19,6	508	15	254	393,5	622,5
609,5	--	16,9	609,5	--	--	355,5	571,5
762	--	9,9	762	--	--	221	442

last modified: 4/1/2021

