


Breaker VLmax. FLEX HANDLE 4x NG & PG

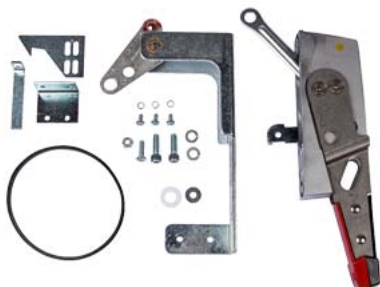

Model			
product brand name		SENTRON	
Mechanical Design			
net weight		0.1 kg	
General Product Approval		EMC	Declaration of Conformity

[Confirmation](#)

[Miscellaneous](#)



Declaration of Conformity	Test Certificates	Marine / Shipping			
 EG-Konf.	Special Test Certificate	 BUREAU VERITAS	 PRS	 RINA	 RMRS

other	Environment	
Confirmation	Miscellaneous	Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>


Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VL9800-3JP41>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3VL9800-3JP41>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL9800-3JP41
CAx-Online-Generator
<http://www.siemens.com/cax>
Tender specifications
<http://www.siemens.com/specifications>

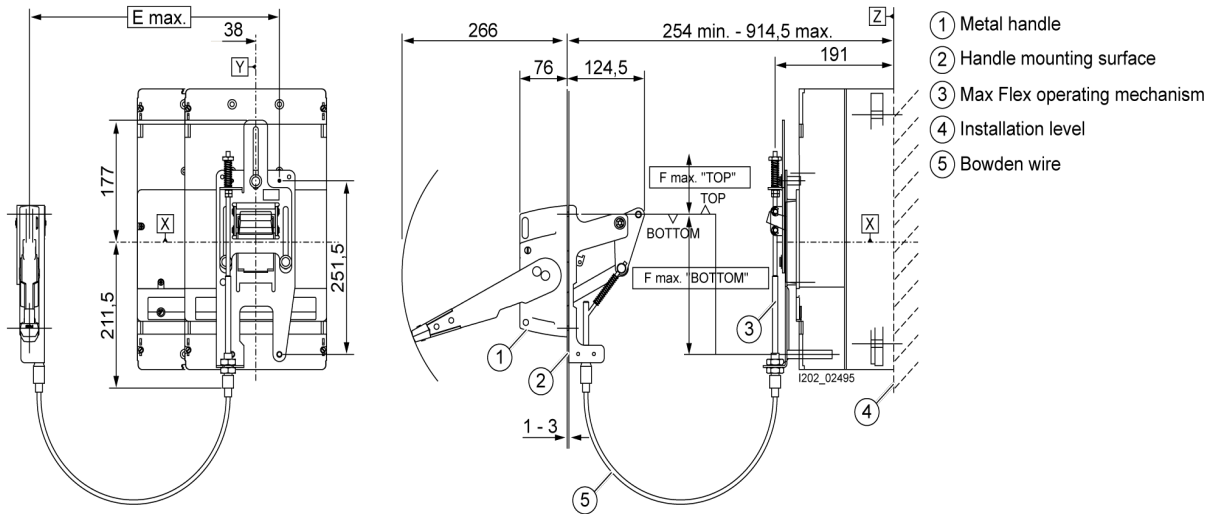

E max.			F max.				
Cabinet depth mm	3VL9800-3JQ41 length 1200 mm	3VL9800-3JQ61 length 1500 mm	Cabinet depth mm	3VL9800-3JQ41 Length 1200 mm		3VL9800-3JQ61 Length 1500 mm	
				TOP	BOTTOM	TOP	BOTTOM
254	406,5	762	254	203	546	444,5	800
305	393,5	749,5	305	190,5	533,5	457	825,5
406,5	381	749,5	406,5	165	533,5	482,5	813
457	393,5	749,5	457	152,5	520,5	470	813
508	406,5	736,6	508	152,5	508	419	800
609,5	393,5	724	609,5	101,5	482,5	355,5	787,5
762	254	660,5	762	38	393,5	279,5	724
914,5	--	584		--	--	165	597

last modified: 4/1/2021

