


OL40A3PBA

ABB contact for Canada [Print to Pdf..](#)

General Information

Extended Product Type:	OL40A3PBA
Product ID:	1SCA022765R3020
EAN:	4034656526856
Catalog Description:	OL40A3PBA Cam switch
Long Description:	O-position: 9 o'clock, step angle 90°, door mounted, snap-on mounted handle.

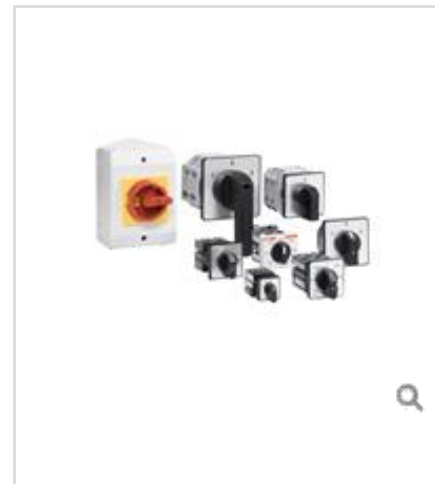

Categories

Products » Low Voltage Products and Systems » Switches » Cam Switches

Ordering

EAN:	4034656526856
Minimum Order Quantity:	1 piece
Customs Tariff Number:	85365080

Dimensions

Product Net Width:	51 mm
Product Net Height:	56 mm
Product Net Depth:	98 mm
Product Net Weight:	0.21 kg

Container Information

Package Level 1 Units:	10 piece
Package Level 1 Width:	100 mm
Package Level 1 Height:	110 mm
Package Level 1 Length:	250 mm
Package Level 1 Gross Weight:	0.21 kg
Package Level 1 EAN:	4034656526856

Environmental

RoHS Status:	Planned to follow EU Directive 2002/95/EC August 18, 2005 and amendment after 2009 Q4
---------------------	---

Technical UL/CSA

Ampere Rating UL/CSA:	40 A
------------------------------	------

Additional Information

Color:	Black
Conventional Free-air Thermal Current (I_{th}):	$q=40^{\circ}\text{C}$ 45 A
Enclosure Type:	Not enclosed
Function:	A3
Handle Type:	Basic handle

IIT Publishing Status:	Level 0 - Information enabled
Mounting Type:	Snap-on door mounting
Number of Poles:	3
Pollution Degree:	3
Product Main Type:	OL40
Product Name:	Cam switch
Rated Impulse Withstand Voltage (U_{imp}):	6 kV
Rated Insulation Voltage (U_i):	690 V
Rated Operational Current AC-22A (I_e):	(500 V) 40 A (690 V) 40 A
Rated Operational Power AC-23A (P_e):	(220 ... 240V) 7.5 kW (415V) 15 kW (500V) 15 kW (690V) 15 kW
Rated Operational Voltage:	690 V
Terminal Type:	Screw Terminals

Certificates and Declarations (Document Number)

Declaration of Conformity - CE:	1SCC302001D0204
RoHS Information:	1SCC302004D0201

Classifications

ETIM 5.0:	EC002611 - Control switch
Object Classification Code:	Q
