

### Optional handles

The type and the ordering number are for one piece.

| Colour | For cam switches | Type | Order number | Delivery batch [pcs] | Weight/unit [kg] |
|--------|------------------|------|--------------|----------------------|------------------|
|--------|------------------|------|--------------|----------------------|------------------|

#### Low extended handle knob

Replaces the standard knob in handles ONP\_ and ONPL\_.

|       |            |       |                 |   |      |
|-------|------------|-------|-----------------|---|------|
| Black | ON_, OL40_ | ONSB1 | 1SCA100878R1001 | 5 | 0.02 |
| Grey  | ON_, OL40_ | ONSG1 | 1SCA100879R1001 | 5 | 0.02 |

#### Hand grip handle, screw mounting

|       |  |        |                 |   |      |
|-------|--|--------|-----------------|---|------|
| Black |  | OLHSD1 | 1SCA022765R2480 | 1 | 0.38 |
| Grey  |  | OLHGD1 | 1SCA022765R2560 | 1 | 0.38 |
| Red   |  | OLHRD1 | 1SCA022765R2640 | 1 | 0.38 |

#### Ball grip handle, screw mounting

|       |  |        |                 |   |      |
|-------|--|--------|-----------------|---|------|
| Black |  | OLISD1 | 1SCA022820R3380 | 1 | 0.25 |
| Grey  |  | OLIGD1 | 1SCA022820R3460 | 1 | 0.25 |
| Red   |  | OLIRD1 | 1SCA022820R3540 | 1 | 0.25 |

#### Pistol type handle, screw mounting

|       |                    |        |                 |    |      |
|-------|--------------------|--------|-----------------|----|------|
| Black | OL80, OL125, OL160 | OLZ2RB | 1SCA022796R4530 | 10 | 0.10 |
| Red   | OL80, OL125, OL160 | OLZ2RR | 1SCA022796R4610 | 10 | 0.10 |
| Black | OL200              | OLZ3RB | 1SCA022796R4700 | 10 | 0.2  |
| Red   | OL200              | OLZ3RR | 1SCA022796R4880 | 10 | 0.2  |

#### Double lever handle, screw mounting

|       |       |        |                 |   |     |
|-------|-------|--------|-----------------|---|-----|
| Black | OL200 | OLZ3DB | 1SCA022796R4960 | 1 | 0.3 |
| Red   | OL200 | OLZ3DR | 1SCA022796R5000 | 1 | 0.3 |

#### Padlockable handle knob, without front plate

The standard handle knob is replaced by the padlockable handle knob. For max 2 padlocks of 6 mm hasp diameter. Standard padlocking in the OFF-position at 9 o'clock. Padlocking in the ON-position (12 o'clock) by turning the control piece 180 degrees. Padlocking in both OFF-and ON-positions by removing a precut in the yellow control piece.

|            |                   |         |                 |   |      |
|------------|-------------------|---------|-----------------|---|------|
| Black      | ON_PB, ON_M, OL40 | ONZ20B  | 1SCA022621R1810 | 5 | 0.06 |
| Red-yellow | ON_PB, ON_M, OL40 | ONZ20RY | 1SCA022621R1900 | 5 | 0.06 |

#### Round padlockable handle for mounting on door

For max 3 padlocks with max 8 mm hasp diameter, locking position 9 o'clock (O, OFF). Locking positions 12 o'clock (1, ON) or when switch rotated. More locking possibilities with programmable square handle type \_5\_ can be specified by the camweb tool.

| Colour | For cam switches | Type | Order number | Delivery batch [pcs] | Weight/unit [kg] |
|--------|------------------|------|--------------|----------------------|------------------|
|--------|------------------|------|--------------|----------------------|------------------|

#### Snap on mounting handle, IP65, NMEA 4 x, size 66x66, shaft 6 mm


|            |                |          |                 |    |      |
|------------|----------------|----------|-----------------|----|------|
| Black      | ON_PB, OL40_PB | OZ331PB  | 1SCA100657R1001 | 10 | 0.04 |
| Red-yellow | ON_PB, OL40_PB | OZ331PRY | 1SCA100664R1001 | 10 | 0.04 |

#### Screw mounting handle, IP65, NMEA 4 x, size 66x66, shaft 6 mm

|            |                |          |                 |    |      |
|------------|----------------|----------|-----------------|----|------|
| Black      | ON_RB, OL40_RB | OZ331RB  | 1SCA100702R1001 | 10 | 0.04 |
| Red-yellow | ON_RB, OL40_RB | OZ331RRY | 1SCA100678R1001 | 10 | 0.04 |

#### Screw mounting handle, IP65, NMEA 4 x, size 90x90, shaft 8 mm

|            |                    |           |                 |    |      |
|------------|--------------------|-----------|-----------------|----|------|
| Black      | OL80, OL125, OL160 | OLZ332RB  | 1SCA022794R7790 | 10 | 0.10 |
| Red-yellow | OL80, OL125, OL160 | OLZ332RRY | 1SCA022794R7870 | 10 | 0.10 |

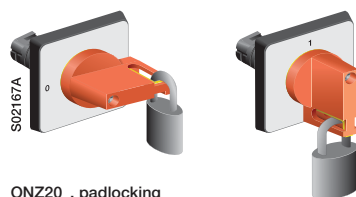

More cam switches with padlockable handles can be configured on Internet by the Camweb configurator tool.



ONSB1



OLHSD1



OLISD1



OLZ2RB



OLZ3RB



OLZ3DB



ONZ20B



ONZ20RY



OZ331\_B



OZ331\_RY



OLZ332RB



OLZ332RRY