

Optional handles

The type and the ordering number are for one piece.

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
--------	------------------	------	--------------	----------------------	------------------

Low extended handle knob

Replaces the standard knob in handles ONP_ and ONPL_.

Black	ON_, OL40_	ONSB1	1SCA100878R1001	5	0.02
Grey	ON_, OL40_	ONSG1	1SCA100879R1001	5	0.02

Hand grip handle, screw mounting

Black		OLHSD1	1SCA022765R2480	1	0.38
Grey		OLHGD1	1SCA022765R2560	1	0.38
Red		OLHRD1	1SCA022765R2640	1	0.38

Ball grip handle, screw mounting

Black		OLISD1	1SCA022820R3380	1	0.25
Grey		OLIGD1	1SCA022820R3460	1	0.25
Red		OLIRD1	1SCA022820R3540	1	0.25

Pistol type handle, screw mounting

Black	OL80, OL125, OL160	OLZ2RB	1SCA022796R4530	10	0.10
Red	OL80, OL125, OL160	OLZ2RR	1SCA022796R4610	10	0.10
Black	OL200	OLZ3RB	1SCA022796R4700	10	0.2
Red	OL200	OLZ3RR	1SCA022796R4880	10	0.2

Double lever handle, screw mounting

Black	OL200	OLZ3DB	1SCA022796R4960	1	0.3
Red	OL200	OLZ3DR	1SCA022796R5000	1	0.3

Padlockable handle knob, without front plate

The standard handle knob is replaced by the padlockable handle knob. For max 2 padlocks of 6 mm hasp diameter. Standard padlocking in the OFF-position at 9 o'clock. Padlocking in the ON-position (12 o'clock) by turning the control piece 180 degrees. Padlocking in both OFF-and ON-positions by removing a precut in the yellow control piece.

Black	ON_PB, ON_M, OL40	ONZ20B	1SCA022621R1810	5	0.06
Red-yellow	ON_PB, ON_M, OL40	ONZ20RY	1SCA022621R1900	5	0.06

Round padlockable handle for mounting on door

For max 3 padlocks with max 8 mm hasp diameter, locking position 9 o'clock (O, OFF). Locking positions 12 o'clock (1, ON) or when switch rotated. More locking possibilities with programmable square handle type _5_ can be specified by the camweb tool.

Colour	For cam switches	Type	Order number	Delivery batch [pcs]	Weight/unit [kg]
--------	------------------	------	--------------	----------------------	------------------

Snap on mounting handle, IP65, NMEA 4 x, size 66x66, shaft 6 mm


Black	ON_PB, OL40_PB	OZ331PB	1SCA100657R1001	10	0.04
Red-yellow	ON_PB, OL40_PB	OZ331PRY	1SCA100664R1001	10	0.04

Screw mounting handle, IP65, NMEA 4 x, size 66x66, shaft 6 mm

Black	ON_RB, OL40_RB	OZ331RB	1SCA100702R1001	10	0.04
Red-yellow	ON_RB, OL40_RB	OZ331RRY	1SCA100678R1001	10	0.04

Screw mounting handle, IP65, NMEA 4 x, size 90x90, shaft 8 mm

Black	OL80, OL125, OL160	OLZ332RB	1SCA022794R7790	10	0.10
Red-yellow	OL80, OL125, OL160	OLZ332RRY	1SCA022794R7870	10	0.10

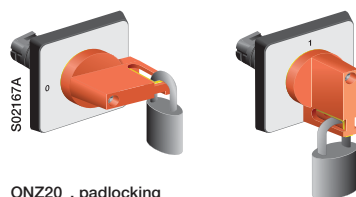

More cam switches with padlockable handles can be configured on Internet by the Camweb configurator tool.

