


ONA04PBA

[Print View..](#)
[Print to Pdf..](#)

General Information

Extended Product Type:	ONA04PBA
Product ID:	1SCA022646R8510
EAN:	4034656523602
Catalog Description:	ONA04PBA Cam switch
Long Description:	O-position: 12 o'clock, step angle 90°, door mounted, snap-on mounted handle.

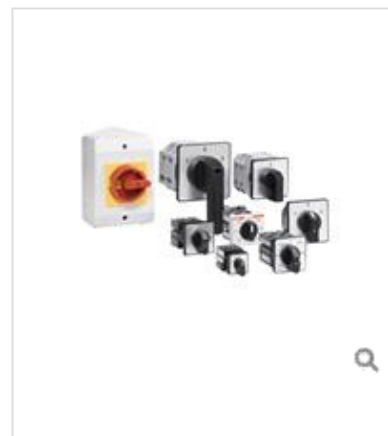

Categories

Products » Low Voltage Products and Systems » Switches » Cam Switches

Ordering

EAN:	4034656523602
Minimum Order Quantity:	1 piece
Customs Tariff Number:	85365080

Dimensions

Product Net Width:	39 mm
Product Net Height:	41 mm
Product Net Depth:	92 mm
Product Net Weight:	0.11 kg

Container Information

Package Level 1 Units:	10 piece
Package Level 1 Width:	100 mm
Package Level 1 Height:	110 mm
Package Level 1 Length:	250 mm
Package Level 1 Gross Weight:	0.11 kg
Package Level 1 EAN:	4034656523602

Environmental

RoHS Status:	Planned to follow EU Directive 2002/95/EC August 18, 2005 and amendment after 2009 Q4
---------------------	---

Technical UL/CSA

Ampere Rating UL/CSA:	25 A
------------------------------	------

Additional Information

Color:	Black
Conventional Free-air Thermal Current (I_{th}):	$q=40^{\circ}\text{C}$ 25 A
Enclosure Type:	Not enclosed
Function:	A04
Handle Type:	Basic handle
IIT Publishing Status:	Level 0 - Information enabled
Mounting Type:	Snap-on door mounting
Number of Poles:	4

Pollution Degree:	3
Product Main Type:	ON
Product Name:	Cam switch
Rated Impulse Withstand Voltage (U_{imp}):	4 kV
Rated Insulation Voltage (U_i):	690 V
Rated Operational Current AC-22A (I_e):	(500 V) 20 A (690 V) 20 A
Rated Operational Power AC-23A (P_e):	(220 ... 240V) 2.6 kW (415V) 7.5 kW (500V) 4.8 kW (690V) 4.8 kW
Rated Operational Voltage:	400 V
Terminal Type:	Screw Terminals

Certificates and Declarations (Document Number)

Declaration of Conformity - CE:	1SCC302001D0204
RoHS Information:	1SCC302004D0201

Classifications

ETIM 5.0:	EC002611 - Control switch
Object Classification Code:	Q
