


Disconnect  
switches  
Fusible

## Kits

30A – 800A, 600V, 3 pole<sup>①</sup>  
UL fuse class J, CC, T, L

Each kit includes:

- 1 three pole switch
- 1 handle
- 1 shaft
- 1 terminal lug kit<sup>②</sup>

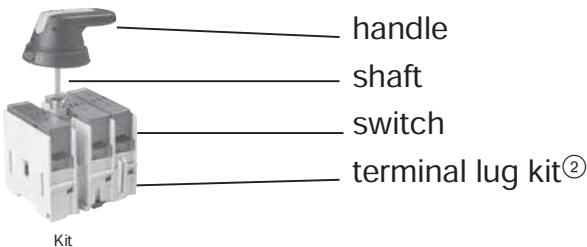

### Kits with selector handles

UL general purpose amp rating	UL Fuse type 600V	Maximum horsepower rating					Kit catalog number	List price		
		Three phase								
		200V	208V	240V	480V	600V				
30	J	5	7.5	7.5	15	20	OSJ30B2A1-180	\$ 314		
30	CC	5	7.5	7.5	15	20	OSC30B2A1-180	314		

### Kits with pistol handles

UL general purpose amp rating	UL Fuse type 600V	Maximum horsepower rating					Kit catalog number	List price		
		Three phase								
		200V	208V	240V	480V	600V				
30	J	5	7.5	7.5	15	20	OSJ30B6-150	\$ 374		
30	CC	5	7.5	7.5	15	20	OSC30B6-150	374		
60	J	15	15	15	30	50	OSJ60B6-150	472		
100	J <sup>③</sup>	25	25	30	60	75	OSJ100B8-150	646		
200	J	50	50	60	125	150	OSKJ200B8-290	1566		
400	J <sup>③</sup>	100	125	125	250	350	OSJ400B4-280	2176		
600	J <sup>③</sup>	150	150	200	400	500	OSJ600B4-280	3406		
800	L	200	200	250	500	600	OSL800B4-280	5266		

### Components for kits with selector handles

Kit catalog number	Switch	Handle <sup>④</sup>				Shaft		Terminal lugs			
	Catalog number	NEMA type	Marking	Handle Defeatable	Mounting catalog number	Length depth <sup>⑤</sup> (inches)	Shaft (inches/mm)	Catalog number	Wire size	Wire type	Catalog number
OSJ30B2A1-180	OS30AJ12	1, 3R, 12	I/O & Off/On	—	OHB2AJ1	6.3 - 9.5	7.1/180	OX5X180	#18 - 8	Cu	Integral
OSC30B2A1-180	OS30ACC12	1, 3R, 12	I/O & Off/On	—	OHB2AJ1	6.3 - 9.5	7.1/180	OX5X180	#18 - 8	Cu	Integral

### Components for kits with pistol handles

Kit catalog number	Switch	Handle <sup>④</sup>				Shaft		Terminal lugs			
	Catalog number	NEMA type	Marking	Handle Defeatable	Mounting catalog number	Length depth <sup>⑤</sup> (inches)	Shaft (inches/mm)	Catalog number	Wire size	Wire type	Catalog number
OSJ30B6-150	OS30AJ12	1, 3R, 12	I/O & Off/On	Yes	OHB65J5	5.3 - 8.3	5.9/150	OXP5X150	#18 - 8	Cu	Integral
OSC30B6-150	OS30ACC12	1, 3R, 12	I/O & Off/On	Yes	OHB65J5	5.3 - 8.3	5.9/150	OXP5X150	#18 - 8	Cu	Integral
OSJ60B6-150	OS60U12	1, 3R, 12	I/O & Off/On	Yes	OHB65J6	5.5 - 8.5	5.9/150	OXP6X150	#14 - 4	Cu	Integral
OSJ100B8-150	OS100J03	1, 3R, 12	I/O & Off/On	Yes	OHB80J6	5.5 - 8.5	5.9/150	OXP6X150	#14 - 2/0	Cu/Al	OZXA-24
OSKJ200B8-290	OS200J03	1, 3R, 12	I/O & Off/On	Yes	OHB80J6	10.5 - 12.7	11.4/290	OXP6X290	#6 - 300kcmil	Cu/Al	OZXA-200
OSJ400B4-280	OES400J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	7.9 - 12.2	11.0/280	OXP12X280	#2 - 600kcmil	Cu/Al	OZXA-26
OSJ600B4-280	OES600J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	11.2 - 14.0	11.0/280	OXP12X280	(2) #2 - 600kcmil	Cu/Al	OZXA-27
OSL800B4-280	OES800J3	1, 3R, 12	I/O & Off/On	Yes	OHB145J12	11.2 - 14.0	11.0/280	OXP12X280	(2) #2 - 600kcmil	Cu/Al	OZXA-27

If other handles or shafts are desired, please order from the individual component pages 18.83 – 18.92.

<sup>①</sup> Other pole configurations available. Please see the individual component pages.

<sup>②</sup> 30A and 60-A fusible switches include standard integral terminal lugs.

<sup>③</sup> J type fuse clips are standard. If 600V Type "T" fuse clips are desired, please select a fuse adapter kit from the individual component pages.

<sup>④</sup> All handles are black and accept three padlocks. For others, please see the individual component pages.

<sup>⑤</sup> Mounting depth is the distance from the outside of the door to the disconnect switch mounting plate. Shaft can be cut to desired length.