

Overview of product range

Side operated switch-disconnectors

100...200 A, UL

UL-types UL98B File #E354681		
		
OTDC100U20S		OTDC100US20S
OTDC200U20S		OTDC200US20S
Rated Voltage [V DC]	1000	1000
Rated current [A]	100 - 200	100 - 200

Ordering information, UL

OTDC100...245, 1000 VDC, side operated



OTDC100...200U20S



OTDC100...200US20S


Side operated, single circuit, 1000 VDC, UL98B - 100...250 A

Side operation. Shafts and handles are not included. OTDC_US types include pre-mounted connection bar kit. The mechanism is located at the end of the switch. Phase barriers are included - installation mandatory.

Number of poles	Circuit	Rated operat. current [A] UL98B / 1000 V	Type	Order code	Weight/unit [kg]
2	1a	100	OTDC100US20S	1SCA131541R1001	1.7
2	1a	200	OTDC200US20S	1SCA131549R1001	1.7
2	1a	250	OTDC245US20S	1SCA149115R1001	1.7
2	2a	100	OTDC100U20S	1SCA131540R1001	1.3
2	2a	200	OTDC200U20S	1SCA131548R1001	1.5
2	2a	250	OTDC245U20S	1SCA149113R1001	1.5

Recommended shafts, handles and bolt kits

Suitable for switches	Shaft	Handle	Bolt kit
OTDC100...250	EXP6X210	OHB65JE005	M8x25

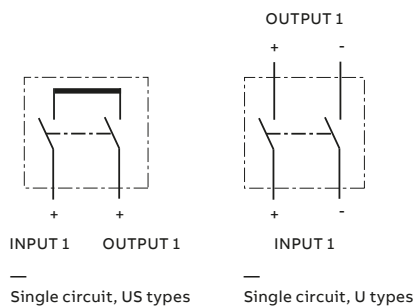

NOTE: The complete list of available accessories can be found in the Accessories section starting on page 67.