

Ordering information, UL

OTDC100...245, 1000 VDC



OTDC100...200US33



OTDC100...200U33

Triple circuit, 1000 VDC, UL98B - 100...200 A
The switches OTDC_U33 and OTDC_US33 can be used for triple circuit applications. Shafts and handles are not included. Switches with direct mount handle (OTDC_K, e.g. OTDC180U33K) are available. Phase barriers are included - installation mandatory.


Number of poles	Circuit	Rated operat. current [A]		Order code	Weight/ unit [kg]
		UL98B / 1000 V	Type		

Front operated, mechanism between the poles. OTDC_US types include pre-mounted connection bar kit.


3x2	7i	100	OTDC100US33	1SCA149086R1001	3.2
3x2	7i	200	OTDC200US33	1SCA149087R1001	3.2
3x2	7a, 7e	100	OTDC100U33	1SCA149069R1001	2.8
3x2	7a, 7e	200	OTDC200U33	1SCA149090R1001	2.8

Recommended shafts, handles and bolt kits

Suitable for switches	Shaft	Handle	Bolt kit
OTDC100...245	EXP6X210	OH65J6	M8x25
OTDC100...245	-	OTDV250EK	M8x25

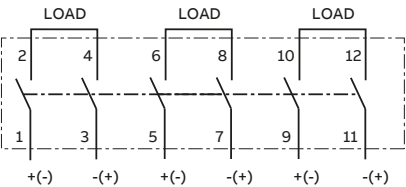

Triple circuit, U types

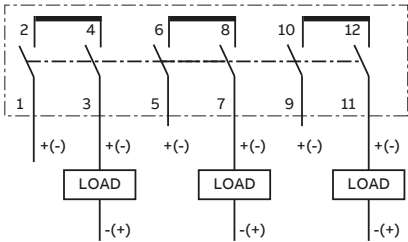

Triple circuit, US types