

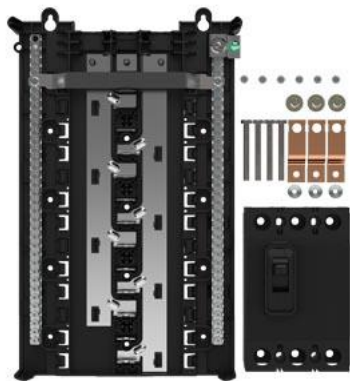


Figure similar

SIEMENS LOW VOLTAGE PL SERIES UNASSEMBLED LOAD CENTER. FACTORY INSTALLED MAIN BREAKER INTERIOR WITH 24 1-INCH SPACES ALLOWING MAX 42 CIRCUITS. 3-PHASE 4-WIRE SYSTEM RATED 120/240V OR 120/208V (150A) 22KA INTERRUPT. SPECIAL FEATURES: COPPER BUS, INTERCHANGEABLE MAIN.

General technical data

configuration of the busbars	150A
fastening method	Combination
phase number	3
suitability for operation	Residential

Electricity

ampacity	150 A
voltage between phase and Ground (GND) rated value	120 V
voltage between phase and phase rated value	240 V

Switching capacity

switching capacity current according to EN 60898 rated value	22000 A
--	---------

Model

product brand name	Siemens
product sub brand name	Load Centers
product type designation	1
type of wiring of distribution board	3/4w

Mechanical Design

number of modular width units for installation width	24
size of the circuit-breaker	MB
width [in]	2128 in

last modified:

6/18/2021 

