

time delay relay 8 functions - 0.05..1 s - 24 V AC DC - 20C

RE7MY13BU

! Discontinued on: 20 Oct 2022

① Discontinued

Main

Range of product	Zelio Time
Product or component type	Industrial timing relay
Contacts type and composition	2 C/O
Component name	RE7
Time delay type	Qt
	A
	С
	Н
	Qg
	W
	D
	Di
Time delay range	0.05 s300 h

Complementary

Discrete output type	Relay
Contacts material	90/10 silver nickel contacts
Width pitch dimension	22.5 mm
[Us] rated supply voltage	110240 V AC 50/60 Hz 24 V AC/DC 50/60 Hz 4248 V AC/DC 50/60 Hz
Voltage range	0.851.1 Us
Connections - terminals	Screw terminals, 2 x 1.5 mm² flexible with cable end Screw terminals, 2 x 2.5 mm² flexible without cable end
Tightening torque	0.61.1 N.m
Setting accuracy of time delay	+/- 10 % of full scale
Repeat accuracy	+/- 0.2 %
Temperature drift	< 0.07 %/°C
Voltage drift	< 0.2 %/V
Minimum pulse duration	20 ms
Reset time	50 ms
Maximum switching voltage	250 V AC/DC
Mechanical durability	20000000 cycles
[Ith] conventional free air thermal current	8 A

23 Oct 2024 Life Is On Schneider

Maximum [le] rated operational current	2 A DC-13 24 V at 70 °C conforming to IEC 60947-5-1/1991/VDE 0660 0.1 A DC-13 250 V at 70 °C conforming to IEC 60947-5-1/1991/VDE 0660 0.2 A DC-13 115 V at 70 °C conforming to IEC 60947-5-1/1991/VDE 0660 3 A AC-15 at 70 °C conforming to IEC 60947-5-1/1991/VDE 0660
Minimum switching capacity	at 12 V 10 mA
Input voltage	< 60 V Y1Z2 terminal(s)
Maximum switching current	1 mA (Y1Z2)
Input compatibility	3/4 wires sensors PNP/NPN without internal load <50 m Y1Z2 terminal(s)
Potentiometer characteristic	Linear 47 kOhm (+/- 20 %), 0.2 W, cable length <25 m Z1Z2 terminal(s)
Marking	CE
Overvoltage category	III conforming to IEC 60664-1
[Ui] rated insulation voltage	250 V between contact circuit and control inputs IEC certified 250 V between contact circuit and power supply IEC certified 300 V between contact circuit and control inputs CSA certified 300 V between contact circuit and power supply CSA certified
Supply disconnection value	> 0.1 Uc
Operating position	Any position without derating
Surge withstand	2 kV conforming to IEC 61000-4-5 level 3
Power consumption in VA	2 VA at 48 V 1.2 VA at 24 V 12.5 VA at 240 V 2.8 VA at 110 V
Maximum power consumption in W	0.8 W at 24 V 1.6 W at 48 V
Terminal description	ALT (Z2)UNUSED (B1-A2)CO (15-16-18)OC (25-26-28)OC (Y1)UNUSED (Z1)UNUSED
Height	78 mm
Width	22.5 mm
Depth	80 mm
Net weight	0.15 kg
Environment	
Immunity to microbreaks	3 ms
Standards	EN/IEC 61812-1
Product certifications	UL CSA GL
Ambient air temperature for storage	-4085 °C
Ambient air temperature for operation	-2060 °C
Relative humidity	1585 % 3K3 conforming to IEC 60721-3-3
Vibration resistance	0.35 mm (f= 1055 Hz) conforming to IEC 60068-2-6
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
IP degree of protection	IP20 (terminals) IP50 (housing)

3 conforming to IEC 60664-1

Pollution degree

Dielectric strength	2.5 kV
Non-dissipating shock wave	4.8 kV
Resistance to electrostatic discharge	6 kV in contact conforming to IEC 61000-4-2 level 3 8 kV in air conforming to IEC 61000-4-2 level 3
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3 level 3
Resistance to fast transients	2 kV conforming to IEC 61000-4-4 level 3
Disturbance radiated/conducted	CISPR 11 group 1 - class A CISPR 22 - class A

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1


Contractual warranty

Warranty 18 months


Dimensions Drawings

Width 22.5 mm

Rail Mounting



Screw Fixing




Product datasheet

RE7MY13BU


Connections and Schema

Internal Wiring Diagram



Recommended Application Wiring Diagram


Start on Energisation



- **1** Supply **2** 12...48 V
- **3** 24 V

Recommended Application Wiring Diagram


Start by External Control



- 1 Supply
- **2** 12...48 V
- **3** 24 V

Recommended Application Wiring Diagram


External Control of Partial Stop




- 1 Supply
- **2** 12...48 V
- **3** 24 V

Control of Several Relays

Control of several relays with a single external control contact

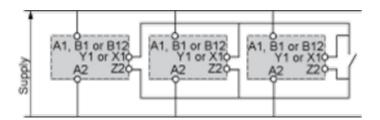


Connection of an External Control Contact Without Using Terminal Z2



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection 3-Wire NPN or PNP Sensor




Connection 3-Wire NPN or PNP Sensor Without Using Terminal Z2

Connection NPN




It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection PNP



It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection of Potentiometer




Connection Precautions



UNEXPECTED EQUIPMENT OPERATION

No galvanic isolation between supply terminals and control inputs.

Failure to follow these instructions can result in death, serious injury, or equipment damage.




Performance Curves

Performance Curves

A.C. Load Curve 1


Electrical durability of contacts on resistive loading millions of operating cycles



X Current broken in A Y Millions of operating cycles

A.C. Load Curve 2

Reduction factor k for inductive loads (applies to values taken from durability curve 1).



\boldsymbol{X} Power factor on breaking (cos $\boldsymbol{\varphi}$)


Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2.

For $\cos \phi = 0.3$: k = 0.6 The electrical durability therefore becomes:1.5 10^6 operating cycles x 0.6 = 900 000 operating cycles.



D. C. Load Limit Curve



- X Current in A
- Y Voltage in V
- **1** L/R = 20 ms
- 2 L/R with load protection diode
- 3 Resistive load


Technical Description

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function D : Symmetrical Flasher Relay (Starting Pulse Off)

Description


Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Function Di: Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.


The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

20



Function H : Interval Relay


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function Qg: Star-Delta Timing

Description

Timing for star-delta starter with contact for switching to star connection.

Function: 1 Output




Function Qt: Star-Delta Timing

Description

Timing for star-delta starter with double On-delay period.

Function: 1 Output



Function W : Interval Relay with Control Signal Off


Description

After power-up and opening of the control contact, the output(s) close(s) for a timing period T.


At the end of this timing period the output(s) revert(s) to its/their initial state.

The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Legend

