# **Product datasheet**

Specification





Harmony Control Relays, Modular 1-phase current control relay, 5 A, 2 CO, 0.15...15 A,, 24...240 V AC/ DC

RM35JA32MW

## Main

Range Of Product	Harmony Control Relays	
Relay Type	Current control relay	
Product Or Component Type	Current control relay	
Relay Name	RM35JA	
Relay Monitored Parameters	Overcurrent or undercurrent detection	
Time Delay	Adjustable 0.330 s, 0 + 10 % Tt- time delay upon fault Adjustable 120 s, 0 + 10 % Ti- inhibition time delay upon startup	
Switching Capacity In Va	1250 VA	
Minimum Switching Current	10 mA at 5 V DC	
Maximum Switching Current	5 A AC/DC	
Maximum Power Consumption In Va	3.5 VA AC	
Measurement Range	150 mA15 A current AC/DC	
Utilisation Category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 DC-14 conforming to IEC 60947-5-1	
Contacts Type And Composition	2 C/O	

# Complementary

Reset Time	1500 ms time delay	
Maximum Switching Voltage	250 V AC/DC	
Supply Voltage Limits	20.4264 V AC/DC	
Operating Voltage Tolerance	- 15 % + 10 % Un	
Maximum Power Consumption In W	0.6 W DC	
Control Circuit Frequency	4070 Hz +/- 10 %	
Resistance Across Terminals	0.005 Ohm at E3-M terminals 0.015 Ohm at E2-M terminals 0.05 Ohm at E1-M terminals	
Output Contacts	2 C/O	
Nominal Output Current	5 A	
Maximum Measuring Cycle	30 ms measurement cycle as true rms value	
Hysteresis	550 % of threshold setting	

Delay At Power Up	0.3 s	
Measurement Accuracy	+/- 10 % of the full scale value	
Repeat Accuracy	+/- 0.5 % for input and measurement circuit +/- 2 % for time delay	
Measurement Error	0.05 %/°C with temperature variation 1 by volt over the whole range with voltage variation	
Polarity	No DC	
Threshold Setting	10100 %	
Marking	CE : EMC 89/336/EEC CE : 73/23/EEC	
Overvoltage Category	III conforming to IEC 60664-1	
Insulation Resistance	<ul> <li>&gt; 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60255-5</li> <li>&gt; 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60664-1</li> <li>&gt; 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60255-5</li> <li>&gt; 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60664-1</li> <li>&gt; 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60255-5</li> <li>&gt; 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60664-1</li> </ul>	
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60664-1	
Operating Position	Any position without derating	
Connections - Terminals	Screw terminals, 1 x 0.51 x 4 mm² (AWG 20AWG 11) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.21 x 2.5 mm² (AWG 24AWG 12) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² (AWG 24AWG 16) flexible with cable end	
Tightening Torque	0.61 N.m conforming to IEC 60947-1	
Housing Material	Self-extinguishing plastic	
Local Signalling	LED (green) for power ON LED (yellow) for relay ON	
Mounting Support	35 mm symmetrical DIN rail conforming to IEC 60715	
Electrical Durability	100000 cycles	
Mechanical Durability	30000000 cycles	
Operating Rate	<= 360 operations/hour full load	
[Un] Rated Nominal Voltage	24240 V AC/DC 50/60 Hz, non self-powered	
Safety Reliability Data	MTTFd = 296.8 years B10d = 270000	
Contacts Material	Cadmium free	
Width	35 mm	
Control Type	Without test button	

# **Environment**

Immunity To Microbreaks	50 ms
Electromagnetic Compatibility	Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2
Standards	IEC 60255-6

Product Certifications	GL	
	UL	
	GOST	
	C-Tick	
	CSA	
Ambient Air Temperature For Storage	-4070 °C	
Ambient Air Temperature For Operation	-2050 °C	
Relative Humidity	95 % at 55 °C conforming to IEC 60068-2-30	
Vibration Resistance	0.35 mm (f= 557.6 Hz) conforming to IEC 60068-2-6	
	1 gn (f= 57.6150 Hz) conforming to IEC 60255-21-1	
Shock Resistance	15 gn for 11 ms conforming to IEC 60255-21-1	
Ip Degree Of Protection	IP20 (terminals) conforming to IEC 60529	
	IP30 (casing) conforming to IEC 60529	
Pollution Degree	3 conforming to IEC 60664-1	
Dielectric Test Voltage	2 kV, 1 min AC 50 Hz conforming to IEC 60255-5	
	2 kV, 1 min AC 50 Hz conforming to IEC 60664-1	
Non-Dissipating Shock Wave	4 kV conforming to IEC 60255-5	
	4 kV conforming to IEC 60664-1	
	4 kV conforming to IEC 61000-4-5	

# **Packing Units**

•	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.500 cm
Package 1 Width	8.000 cm
Package 1 Length	9.500 cm
Package 1 Weight	145.000 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	48
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	7.735 kg

# **Contractual warranty**

Warranty 18 months

# Sustainability Green Premium"

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes

## **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information


# **Product datasheet**


## RM35JA32MW

### **Dimensions Drawings**

## **Current Control Relays**

### **Dimensions and Mounting**

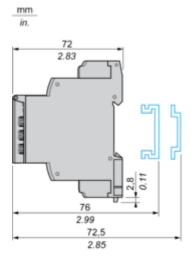




# **Product datasheet**

## RM35JA32MW

Connections and Schema

## **Current Control Relays**


## Wiring Diagram




### **Application Schemes**

### **Example: Detection of Jamming on a Crusher (Overcurrent Function)**

Current measured ≤ 15 A

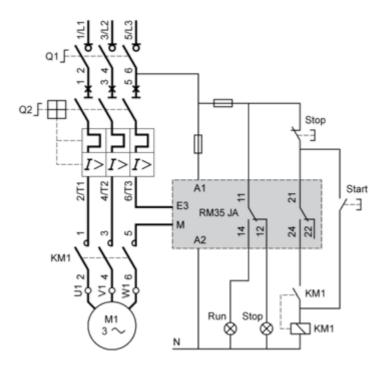

#### Current measured > 15 A

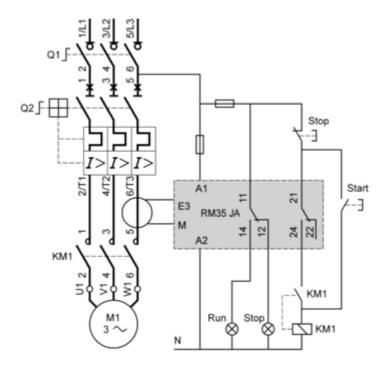


## RM35JA32MW

### **Technical Description**


### **Function Diagrams**

#### **Undercurrent Detection**

Without memory ("No Memory" mode)




#### With memory ("Memory" mode)




#### **Overcurrent Detection**

Without memory ("No Memory" mode)



### With memory ("Memory" mode)



#### Legend

Ti Starting inhibition time delay

Tt Time delay after crossing of threshold

Un Supply voltage

I Monitored current

**H** Hysteresis

I> Overcurrent threshold

I< Undercurrent threshold

11-12/11-14, 21-22/21-24 Output relay connections

Relay status: black color = energized.

**NOTE:** In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.