## **Product datasheet**

Specification





# socket RSZ - separate contact - < 250 V AC - screw connector

RSZE1S35M

#### Main

Range Of Product	Harmony Electromechanical Relays	
Device Short Name	RSZ	
Product Or Component Type	Socket	
Product Compatibility	Plug-in relay RSB with 1 C/O contact at 12 A	
Contacts Type And Composition	1 C/O	
[Ith] Conventional Free Air Thermal Current	12 A	

### Complementary

Shape Of Pin	Flat	
[Ue] Rated Operational Voltage	< 250 V AC	
Contact Terminal Arrangement	Separate	
Connections - Terminals	Screw connectors, 1 x 0.251 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Screw connectors, 2 x 0.252 x 1 mm² (AWG 22AWG 17) flexible with cable end Screw connectors, 1 x 0.51 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw connectors, 2 x 0.52 x 1.5 mm² (AWG 20AWG 16) solid without cable end	
Tightening Torque	< 0.8 N.m for M3 screw(s)	
Fixing Mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)	
[Uimp] Rated Impulse Withstand Voltage	3.6 kV	
Overvoltage Category	egory III	
Pollution Degree	3	
Sale Per Indivisible Quantity	10	
Width	15.5 mm	

#### **Environment**

Ip Degree Of Protection	IP20 conforming to IEC 60529	
Standards	IEC 61984	
Product Certifications	UL CSA	
Marking	CE	
Ambient Air Temperature For Storage	-4085 °C	
Ambient Air Temperature For Operation	-2585 °C	

## **Packing Units**

PCE
1
7.000 cm
9.000 cm
17.000 cm
35.000 g
BB1
10
7.000 cm
9.000 cm
17.000 cm
358.000 g
S03
240
30.000 cm
30.000 cm
40.000 cm
9.148 kg

## **Contractual warranty**

Warranty 12 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance


<b>⊘</b>	Reach Free Of Svhc	
<b>9</b>	Toxic Heavy Metal Free	
<b>②</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes

#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

#### **Dimensions Drawings**

#### **Dimensions**

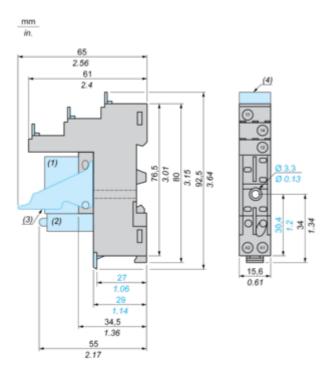


- (1) Relays
  (2) Protection module
- (3) Maintaining clamp
- (4) Legend

#### RSZE1S35M

Connections and Schema

#### Wiring Diagram





**NOTE:** For DC input, A1 have to be +, otherwise it would short circuit from protection module