Product data sheet

Specifications





socket, Harmony Electromechanical Relays, for RUMC3 relays, 12A, screw connec to rs, separate contact

RUZSC3M

Main

| Range Of Product | Harmony Electromechanical Relays | |
|--|----------------------------------|--|
| Device Short Name | RUZ | |
| Product Or Component Type | Socket | |
| Product Compatibility | Plug-in relay RUM 3 C/O | |
| Contacts Type And Composition | 3 C/O | |
| [Ith] Conventional Free Air Thermal Current | 12 A | |
| [Ue] Rated Operational Voltage | < 250 V | |

Complementary

| Shape Of Pin | Cylindrical | |
|--|---|--|
| Contact Terminal Arrangement | Separate | |
| Connections - Terminals | Connector, 1 x 0.251 x 2.5 mm ² AWG 22AWG 14) flexible with cable end Connector, 2 x 0.252 x 1 mm ² AWG 22AWG 17) flexible with cable end Connector, 1 x 0.51 x 2.5 mm ² AWG 20AWG 14) solid without cable end Connector, 2 x 0.52 x 1.5 mm ² AWG 20AWG 16) solid without cable end | |
| Tightening Torque | < 1 N.m M3.5 | |
| Fixing Mode | By screw (panel) Clip-on (35 mm symmetrical DIN rail) | |
| [Uimp] Rated Impulse Withstand Voltage | 4 kV | |
| Overvoltage Category | III | |
| Pollution Degree | Degree 3 | |
| Sale Per Indivisible Quantity | r Indivisible Quantity 10 | |
| Width | 1.42 in (36 mm) | |
| Net Weight | t Weight 0.22 lb(US) (0.1 kg) | |

Environment

| Ip Degree Of Protection | IP20 conforming to IEC 60529 | |
|---------------------------------------|------------------------------|--|
| Standards | IEC 61984 | |
| Product Certifications | CSA UL | |
| Marking | CE | |
| Ambient Air Temperature For Storage | -40185 °F (-4085 °C) | |
| Ambient Air Temperature For Operation | -40131 °F (-4055 °C) | |

Packing Units

| _ | | |
|------------------------------|---------------------------|--|
| Unit Type Of Package 1 | PCE | |
| Number Of Units In Package 1 | 1 | |
| Package 1 Height | 1.34 in (3.4 cm) | |
| Package 1 Width | 2.48 in (6.3 cm) | |
| Package 1 Length | 3.74 in (9.5 cm) | |
| Package 1 Weight | e 1 Weight 3.10 oz (88 g) | |
| Unit Type Of Package 2 | Of Package 2 BB1 | |
| Number Of Units In Package 2 | 10 | |
| Package 2 Height | 3.94 in (10 cm) | |
| Package 2 Width | 4.17 in (10.6 cm) | |
| Package 2 Length | 7.09 in (18 cm) | |
| Package 2 Weight | 31.18 oz (884 g) | |
| Unit Type Of Package 3 | S03 | |
| Number Of Units In Package 3 | 80 | |
| Package 3 Height | 11.81 in (30 cm) | |
| Package 3 Width | 11.81 in (30 cm) | |
| Package 3 Length | 15.75 in (40 cm) | |
| Package 3 Weight | 16.69 lb(US) (7.571 kg) | |

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


| Ø | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| Ø | Toxic Heavy Metal Free | |
| ⊘ | Mercury Free | |
| Ø | Rohs Exemption Information | Yes |

Certifications & Standards

| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | No need of specific recycling operations |

Dimensions Drawings

Dimensions

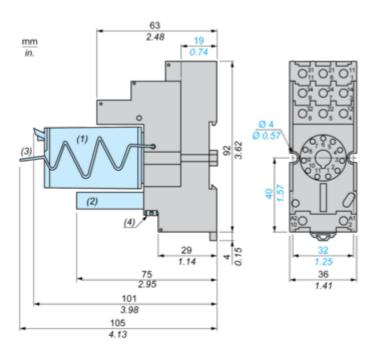


- (1) Relays(2) Protection module(3) Maintaining clamp
- (4) 2 bus jumpers

Product data sheet

RUZSC3M

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

RUZSC3M

Bus Jumpers Mounting on Sockets with Separate Contacts

Example of RUZS2 bus jumper mounting on sockets (view from below)

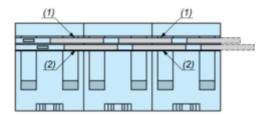

- (1) 2 bus jumpers (polarity A2)(2) 2 bus jumpers (polarity A1)