

Product data sheet

Specifications



single phase relay, Harmony Solid State Relays, 25A, panel mount, DC switching, thermal pad, input 3.5 to 32V DC, output 1 to 150V DC, 1NO

SSP1D425BDT

Product availability: Stock - Normally stocked in distribution facility

Price*: 31.77 USD

Main

Range Of Product	Harmony Solid State Relays
Provided Accessory	Thermal pad
Product Or Component Type	Solid state relay up to 30 A
Device Short Name	SSP1
Mounting Support	Panel
Number Of Phases	1 phase
Line Rated Current	25 A
Solid State Output Type	Mosfet output DC switching
Output Switching Mode	DC switching

Complementary

Minimum Switching Voltage	3.5 V DC turn-on
Maximum Switching Voltage	1 V DC turn-off
Response Time	0.1 ms (turn-on) 0.1 ms (turn-off)
Input Current	10...15 mA
Load Current	0.001...25 A
Surge Current	106 A 10 ms
Co-Ordination Type	Type 1 - 25 A miniature circuit breaker (MCB) B Type 2 - 13 A miniature circuit breaker (MCB) B
Maximum Leakage Current	0.3 mA off-state
Maximum Voltage Drop	<2.1 V on-state
Insulation Resistance	1000 MOhm at 500 V DC
Maximum Capacitance	50 pF for input/output
Dielectric Strength	2.5 kV AC for input/output 2.5 kV AC for input or output to case
[Uimp] Rated Impulse Withstand Voltage	2.5 kV output to case
Tightening Torque	1.5...1.7 N.m for input 2...2.2 N.m for output

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Connections - Terminals	Screw terminals 0.2...3.3 mm², AWG 24...AWG 12) with cable end input Screw terminals 0.5...5.26 mm², AWG 20...AWG 10) with cable end output Screw terminals 0.2...3.3 mm², AWG 24...AWG 12) without cable end input Screw terminals 0.5...8.26 mm², AWG 20...AWG 8) without cable end output Forked type tag connectors 9.2 x 4 mm input Ring lugs 9.2 x 4 mm input Forked type tag connectors 11.7 x 4.5 mm output Ring lugs 11.7 x 4.5 mm output
Thermal Resistance	0.22 °C/W junction to case
Thermal Pad Impedance	0.48 °C-in²/W at 25 psi
Led Indicator	LED, green input
Ip Degree Of Protection	IP20
Safety Reliability Data	B10d = 1731395 MTTFd = 1875.9 years
Net Weight	3.15 oz (89.2 g)
Device Presentation	Complete product

Environment

Ambient Air Temperature For Operation	-40...176 °F (-40...80 °C)
Ambient Air Temperature For Storage	-40...257 °F (-40...125 °C)
Pollution Degree	2
Overvoltage Category	III
Product Certifications	EAC CE UL CSA
Marking	UL CE EAC CSA
Standards	CSA C22.2 No 14-13 IEC 62314 IEC 60950-1 UL 508

Ordering and shipping details

Category	US10CP222375
Discount Schedule	0CP2
Gtin	3606485442013
Returnability	Yes
Country Of Origin	US

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.50 in (3.800 cm)
Package 1 Width	1.89 in (4.800 cm)
Package 1 Length	2.56 in (6.500 cm)
Package 1 Weight	3.74 oz (106.000 g)
Unit Type Of Package 2	S01

Number Of Units In Package 2	30
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	5.91 in (15.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	7.92 lb(US) (3.592 kg)

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions


mm
in.

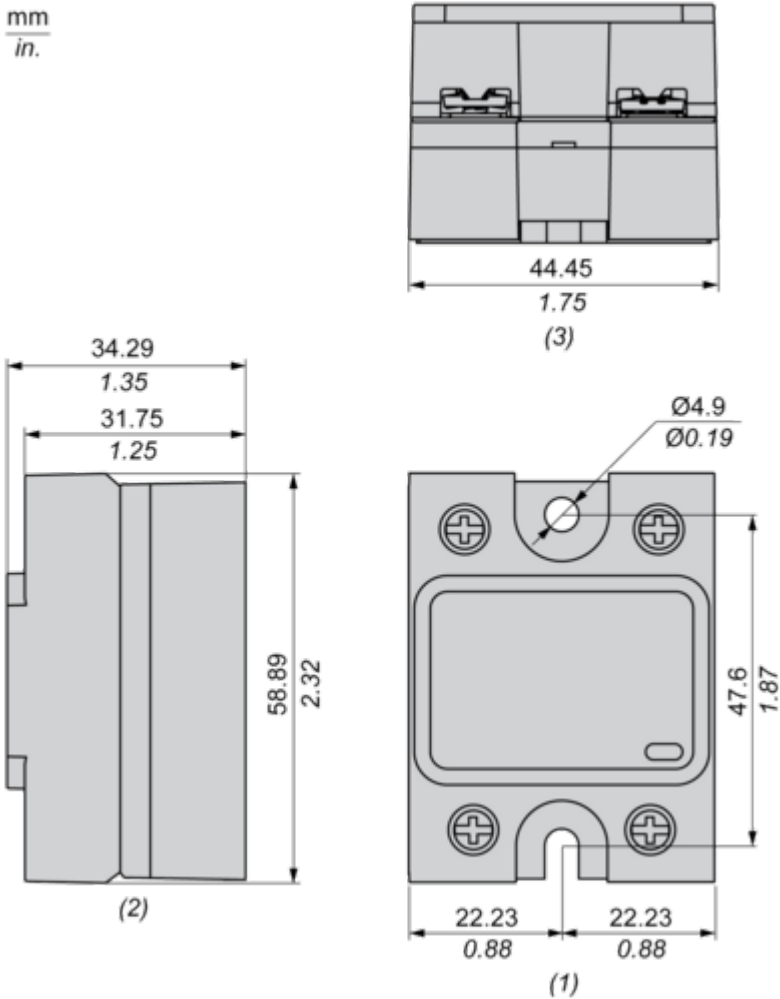

- (1) Front view
- (2) Side view
- (3) Bottom view

Performance Curves

Derating Curves

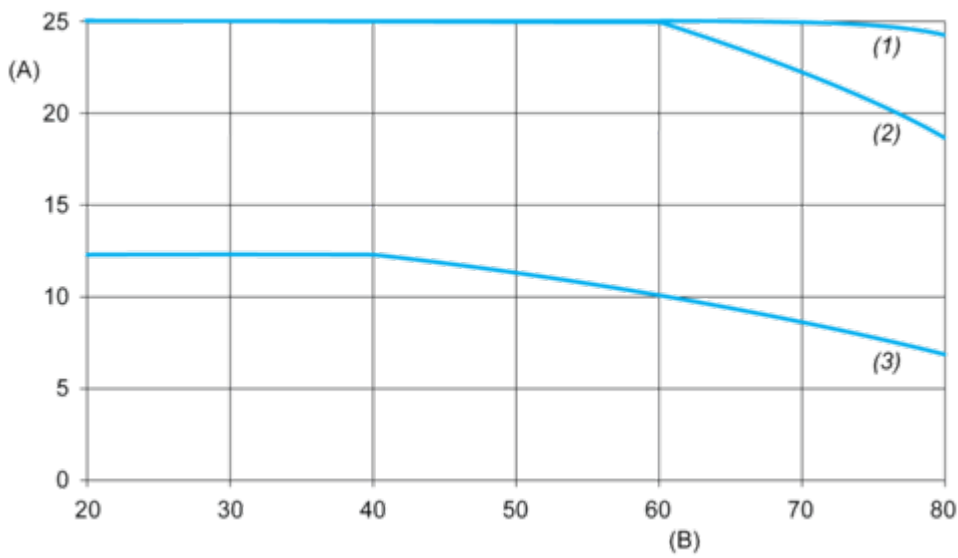

A : Load Current (Arms)
B : Ambient Temperature (°C)
(1) For Heatsink SSRHD10
(2) For Heatsink SSRHP17
(3) No Heatsink