




Applications



Approvals

EN/IEC 60947-2  (1)

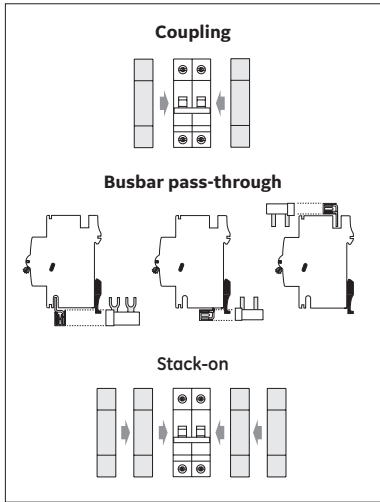

(1) Ask for availability. Under Type approval.

Auxiliary switches


Undervoltage release Tele U

The Tele U releases the main UL1077 and UL1053 modular devices in case the power supply drops below 0.5x rated voltage. Time delay adjusting up to 300 ms.

Performance

Rated voltage AC	(V)	240
Rated voltage DC/AC	(V)	12, 24, 48 DC/AC
Tripping voltage	(V)	≤0.5xUn±10%
Resetting voltage	(V)	>0.5xUn±10%
Tripping time	(ms)	Adjustable 0...300
Electrical endurance		2000
Terminal capacity flexible/rigid cable	AWG(mm²)	18-14(2.5)
Weight	oz.(g)	4.41(125)

Tele U - Undervoltage release

	Voltage	Cat. No.	Pack.
	AC 240V	TELEU-230	1
	AC/DC 12V	TELEU-12	1
	AC/DC 24V	TELEU-24	1
	AC/DC 48V	TELEU-48	1

Dimensional drawings in.(mm)

