

Product datasheet

Specifications



M168 electronic expansion valve driver module with built - in Display

TM168DEVCM

⚠ Discontinued on: 30 Sept 2015

⚠ End-of-service on: 28 Oct 2015

⚠ Discontinued

EAN Code: 3595864109633

Main

Range Of Product	Modicon M168 logic controller
Product Or Component Type	Application-specific expansion module
Product Specific Application	Control of electronic expansion valve
Connector Type	Screw terminal block

Complementary

Discrete Input Number	1 for input
Contacts Usage	Free contact
Discrete Input Voltage	230 V
Discrete Input Voltage Type	AC
Sensor Power Supply	110...260 V AC
Voltage State 1 Guaranteed	> 100 V for input
Voltage State 0 Guaranteed	< 60 V for input
Input Impedance	100000 Ohm
Discrete Output Voltage	250 V AC
Discrete Output Current	5000 mA
Display Type	Four 7-segment display units
Mounting Support	35 mm symmetrical DIN rail
Width	70 mm
Height	158 mm
Depth	61 mm
Net Weight	0.323 kg

Environment

Standards	2004/108/EC EN 60730-1 EN 61000-6-1 2006/95/EEC EN 61000-6-3
Marking	CE
Ambient Air Temperature For Operation	0...50 °C
Ambient Air Temperature For Storage	-20...65 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Relative Humidity	5...95 % without condensation
Ip Degree Of Protection	IP20
Pollution Degree	2
Overvoltage Category	III
Operating Altitude	0...2000 m
Vibration Resistance	1 gn, amplitude: 3.5 mm (f = 5...150 Hz)
Shock Resistance	15 gn for 11 ms

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	11.0 cm
Package 1 Length	15.5 cm
Package 1 Weight	473.0 g


Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings


Electronic Expansion Valve Module

Dimensions

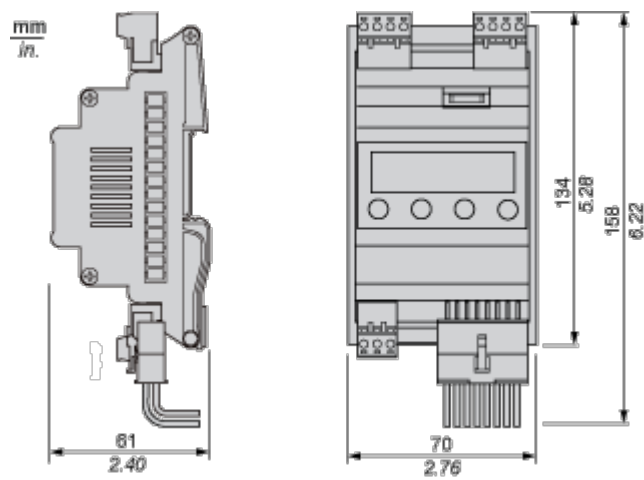


Mounting and Clearance


Mounting and Clearance

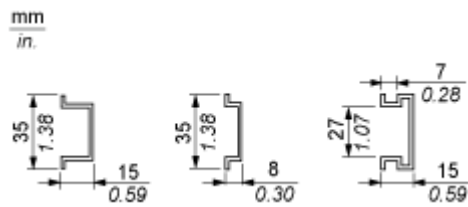


Mounting



Dismounting



Misplacement

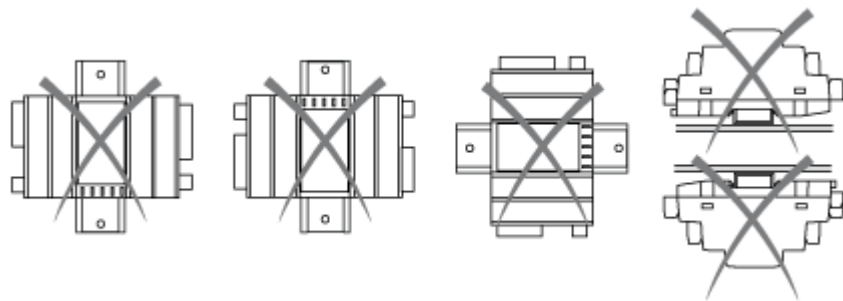


Connections and Schema

Electronic Expansion Valve Module


Electrical Connections

Module connections

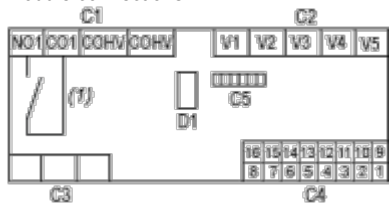

- (1) Max. 3 A
- C1: Connector 1
- C2: Connector 2
- C3: Connector 3
- C4: Connector 4
- C5: Connector 5
- D1: Dipswitch 1

Connector 1: digital output and high voltage digital input.

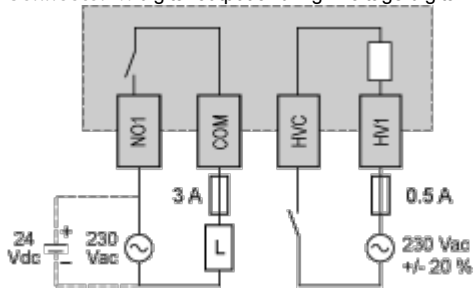

(4 poles male terminal block pitch 5.0 mm (0.196 in))

Connector 2: Alco Controls electronic expansion valve connection (5 poles male terminal block pitch 5.0 mm (0.196 in))

Connector 3: reserved.

Dipswitch 1: micro-switches 1 and 2 are reserved (must be in ON position).


Connector 4: (16 poles male Minifit connector)

PIN	MEANING
1	power supply input (24 Vac/dc)
2	common for analog and low voltage digital inputs
3	
4	
5	not connected
6	not connected
7	analog input 2 (suction temperature sensor; NTC)
8	analog input 1 (evaporation pressure sensor; 4-20 mA)
9	power supply input (24 Vac/dc)

PIN	MEANING
10	input power supply coming from the TM168AVCM battery backup module (12 Vdc)
11	power supply pressure transducer (12 Vdc)
12	not connected
13	not connected
14	not connected
15	low voltage digital input 1 (enable)
16	low voltage digital input 2 (backup battery loading status)

The power supply coming from the TM168AVCM battery backup module has sufficient power to support the closing of the valve during a power outage.

Connector 5: TTL serial port (6 poles Micromatch connector) with Modbus communication protocol (use TM168AVCMCOM, see wiring diagram below).



- (1) To connector 5
- (2) 3 screw terminals

PIN	RS485 SIGNAL
+	D1 (A+)
-	D0 (B-)
COM	0 V

Wiring Recommendations

The maximum lengths of the connected cables are the followings

- power supply: 1 m (3.280 ft)
- analog inputs: 3 m (9.842 ft)
- digital inputs: 3 m (9.842 ft)
- digital outputs: 10 m (32.808 ft)
- electronic expansion valve: 6 m (19.685 ft)