# **Product data sheet**

Specification





# logic controller, Modicon M221, 16 IO, relay

TM221M16R

Product availability: Stock - Normally stocked in distribution facility

Price\*: 279.00 USD

# Main

Range of Product	Modicon M221
Product or Component Type	Logic controller
[Us] rated supply voltage	24 V DC
Discrete input number	8, discrete input IEC 61131-2 Type 1
Analogue input number	2 010 V
Discrete output type	Relay normally open
Discrete output number	8 relay
Discrete output voltage	5125 V DC 5250 V AC
Discrete output current	2 A

# Complementary

•	
Discrete I/O number	16
Maximum number of I/O expansion module	7 (local I/O-Architecture) 14 (remote I/O-Architecture)
Supply voltage limits	20.428.8 V
Inrush current	35 A
Maximum power consumption in W	22.5 W 24 V with max number of I/O expansion module) 3.6 W 24 V without I/O expansion module)
Power supply output current	0.52 A 5 V expansion bus 0.46 A 24 V expansion bus
Discrete input logic	Sink or source (positive/negative)
Discrete input voltage	24 V
Discrete input voltage type	DC
Analogue input resolution	10 bits
LSB value	10 mV
Conversion time	1 ms per channel + 1 controller cycle time analog input
Permitted overload on inputs	+/- 30 V DC 5 min maximum)analog input +/- 13 V DC permanent)analog input
Voltage state 1 guaranteed	>= 15 V input
Voltage state 0 guaranteed	<= 5 V input
Discrete input current	7 mA discrete input 5 mA fast input

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Input impedance	100 kOhm analog input 3.4 kOhm input 4.9 kOhm fast input
Response time	35 µs turn-off, I2I5 input 10 ms turn-on output 10 ms turn-off output 5 µs turn-on, I0, I1, I6, I7 fast input 35 µs turn-on, other terminals input 5 µs turn-off, I0, I1, I6, I7 fast input 100 µs turn-off, other terminals input
Configurable filtering time	0 ms input 3 ms input 12 ms input
Output voltage limits	125 V DC 277 V AC
Maximum current per output common	7 A
Absolute accuracy error	+/- 1 % of full scale analog input
Electrical durability	100000 cycles AC-12, 120 V, 240 VA, resistive 100000 cycles AC-12, 240 V, 480 VA, resistive 300000 cycles AC-12, 120 V, 80 VA, resistive 300000 cycles AC-12, 240 V, 160 VA, resistive 100000 cycles AC-15, cos phi = 0.35, 120 V, 60 VA, inductive 100000 cycles AC-15, cos phi = 0.35, 240 V, 120 VA, inductive 300000 cycles AC-15, cos phi = 0.35, 120 V, 18 VA, inductive 300000 cycles AC-15, cos phi = 0.35, 240 V, 36 VA, inductive 100000 cycles AC-14, cos phi = 0.35, 240 V, 36 VA, inductive 100000 cycles AC-14, cos phi = 0.7, 120 V, 120 VA, inductive 100000 cycles AC-14, cos phi = 0.7, 240 V, 240 VA, inductive 300000 cycles AC-14, cos phi = 0.7, 240 V, 240 VA, inductive 300000 cycles AC-14, cos phi = 0.7, 240 V, 72 VA, inductive 100000 cycles DC-12, 24 V, 48 W, resistive 300000 cycles DC-12, 24 V, 16 W, resistive 100000 cycles DC-13, 24 V, 24 W, inductive (L/R = 7 ms) 300000 cycles DC-13, 24 V, 7.2 W, inductive (L/R = 7 ms)
Switching frequency	20 switching operations/minute with maximum load
Mechanical durability	20000000 cycles relay output
Minimum load	1 mA 5 V DC relay output
Protection type	Without protection 5 A
Reset time	1 s
Memory capacity	256 kB user application and data RAM 10000 instructions 256 kB internal variables RAM
Data backed up	256 kB built-in flash memory backup of application and data
Data storage equipment	2 GB SD card optional)
Battery type	BR2032 or CR2032X lithium non-rechargeable
Backup time	1 year 77.0000000000 °F (25 °C) by interruption of power supply)
Execution time for 1 KInstruction	0.3 ms event and periodic task 0.7 ms other instruction
Execution time per instruction	0.2 μs Boolean
Exct time for event task	60 μs response time
Application structure	1 configurable freewheeling/cyclic master task 1 cyclic auxiliary task 8 interrupt tasks
Maximum size of object areas	255 %TM timers 8000 %MW memory words 255 %C counters 512 %M memory bits 512 %KW constant words
Realtime clock	With

Clock drift	<= 30 s/month 77.00000000000 °F (25 °C)
Regulation loop	Adjustable PID regulator up to 14 simultaneous loops
Counting input number	4 fast input (HSC mode) 100 kHz 32 bits
counter function	Pulse/direction A/B Single phase
Integrated connection type	USB port mini B USB 2.0 Non isolated serial link serial 1 RJ45 RS485 Non isolated serial link serial 2 RJ45 RS232/RS485
Supply	Serial 1)serial link supply 5 V, <200 mA
Transmission rate	1.2115.2 kbit/s (115.2 kbit/s by default) 49.2 ft (15 m) RS485 1.2115.2 kbit/s (115.2 kbit/s by default) 9.8 ft (3 m) RS232 480 Mbit/s USB
Communication port protocol	USB port USB - SoMachine-Network Non isolated serial link Modbus master/slave - RTU/ASCII or SoMachine-Network
communication service	Modbus slave Modbus master
Local signalling	for PWR 1 LED (green) for RUN 1 LED (green) for module error (ERR) 1 LED (red) for SD card access (SD) 1 LED (green) for BAT 1 LED (red) for SL1 1 LED (green) for SL2 1 LED (green) for I/O state 1 LED per channel (green)
Electrical connection	terminal block, 3 for connecting the 24 V DC power supply connector, 4 for analogue inputs Mini B USB 2.0 connector for a programming terminal removable screw terminal block, 10 for inputs removable screw terminal block, 11 for outputs
Maximum cable distance between devices	Shielded cable <32.8 ft (10 m) fast input Unshielded cable <98.4 ft (30 m) output Unshielded cable <98.4 ft (30 m) digital input Unshielded cable <3.3 ft (1 m) analog input
Insulation	Between input and internal logic 500 V AC Between fast input and internal logic 500 V AC Non-insulated between inputs Between output and internal logic 500 V AC Between output groups 500 V AC Non-insulated between analogue input and internal logic Non-insulated between analogue inputs
marking	CE
Mounting support	Top hat type TH35-15 rail IEC 60715 Top hat type TH35-7.5 rail IEC 60715 plate or panel with fixing kit
Height	3.5 in (90 mm)
Depth	2.8 in (70 mm)
Width	2.8 in (70 mm)
Net Weight	0.582 lb(US) (0.264 kg)

# **Environment**

Standards IEC 61131-2

UL 508 CAN/CSA C22.2 No. 213 IACS E10 ANSI/ISA 12-12-01



Product Certifications	DNV-GL
	ABS
	LR
	cULus
	RCM
	EAC CE
	UKCA
	cULus HazLoc
Environmental characteristic	Ordinary and hazardous location
Resistance to electrostatic	<u> </u>
discharge	8 kV in air IEC 61000-4-2 4 kV on contact IEC 61000-4-2
	4 KV OII COIRECT ILO 01000-4-2
Resistance to electromagnetic	9.1 V/m (10 V/m) 80 MHz1 GHz IEC 61000-4-3
fields	2.7 V/m (3 V/m) 1.4 GHz2 GHz IEC 61000-4-3
	0.9 V/m (1 V/m) 22.7 GHz IEC 61000-4-3
Resistance to magnetic fields	98.4 A/m (30 A/m) 50/60 Hz IEC 61000-4-8
Resistance to fast transients	2 kV IEC 61000-4-4 power lines)
	2 kV IEC 61000-4-4 relay output)
	1 kV IEC 61000-4-4 I/O)
	1 kV IEC 61000-4-4 Ethernet line)
	1 kV IEC 61000-4-4 serial link)
Surge withstand	2 kV power lines (AC) common mode IEC 61000-4-5
go	2 kV power lines (AC) common mode IEC 61000-4-5
	1 kV I/O common mode IEC 61000-4-5
	1 kV shielded cable common mode IEC 61000-4-5
	0.5 kV power lines (DC) differential mode IEC 61000-4-5
	1 kV power lines (AC) differential mode IEC 61000-4-5
	1 kV relay output differential mode IEC 61000-4-5
	0.5 kV power lines (DC) common mode IEC 61000-4-5
Pagistance to conducted	40 V 0 45 - 00 MH- IFO 04000 4 0
Resistance to conducted disturbances	10 V 0.1580 MHz IEC 61000-4-6
alotal balloco	3 V 0.180 MHz Marine specification (LR, ABS, DNV, GL)
	10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) Marine specification (LR, ABS, DNV, GL)
	Specification (ET, ABO, BITT, GE)
Electromagnetic emission	Conducted emissions 79 dBµV/m QP/66 dBµV/m AV power lines (AC))0.150.5
	MHz IEC 55011
	Conducted emissions 73 dBµV/m QP/60 dBµV/m AV power lines (AC))0.5300 MHz
	IEC 55011
	Conducted emissions 12069 dBµV/m QP power lines)10150 kHz IEC 55011
	Conducted emissions 63 dBµV/m QP power lines)1.530 MHz IEC 55011
	Radiated emissions 40 dBµV/m QP class A 10 m)30230 MHz IEC 55011
	Conducted emissions 7963 dBµV/m QP power lines)1501500 kHz IEC 55011
	Radiated emissions 47 dBμV/m QP class A 10 m)2001000 MHz IEC 55011
Immunity to microbreaks	10 ms
Ambient air temperature for	14.0000000000131.0000000000 °F (-1055 °C) horizontal installation)
operation	14.000000000095.0000000000 °F (-1035 °C) vertical installation)
Ambient Air Temperature for Storage	-13.0000000000158.0000000000 °F (-2570 °C)
Relative humidity	10 Q5 % without condensation in operation)
	1095 %, without condensation in operation) 1095 %, without condensation in storage)
IP degree of protection	IP20 with protective cover in place
Pollution degree	<= 2
Operating altitude	06561.68 ft (02000 m)
Storage altitude	0.0000000009842.5 ft (03000 m)
Vibration resistance	3.5 mm 58.4 Hz symmetrical rail
	3.5 mm 58.4 Hz panel mounting
	1 gn 8.4150 Hz symmetrical rail
	1 gn 8.4150 Hz panel mounting
<u> </u>	
Shock resistance	98 m/s² 11 ms

# Ordering and shipping details

Category	US10MSX22533
Discount Schedule	0MSX
GTIN	3606480611254
Returnability	Yes
Country of origin	TW

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.953 in (10.041 cm)
Package 1 Width	4.26 in (10.83 cm)
Package 1 Length	5.04 in (12.81 cm)
Package 1 Weight	15.5 oz (440.0 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	24
Package 2 Height	11.5 in (29.1 cm)
Package 2 Width	15.6 in (39.6 cm)
Package 2 Length	22.8 in (57.8 cm)
Package 2 Weight	25.71 lb(US) (11.66 kg)
Unit Type of Package 3	P12
Number of Units in Package 3	288
Package 3 Height	41.3 in (105.0 cm)
Package 3 Width	47.2 in (120.0 cm)
Package 3 Length	31.5 in (80.0 cm)
Package 3 Weight	326.3 lb(US) (148 kg)

# Sustainability Screen Premium\*

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

# Well-being performance

<b>Ø</b>	Mercury Free	
	Rohs Exemption Information	Yes
	Pvc Free	

## **Certifications & Standards**


Reach Regulation	REACh Declaration	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)	
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	
Circularity Profile	End of Life Information	
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	


# **Product data sheet**

# TM221M16R

# **Dimensions Drawings**

# **Dimensions**






# **Product data sheet**

# TM221M16R


Mounting and Clearance

Mounting on a Rail



# TM221M16R


## **Direct Mounting on a Panel Surface**

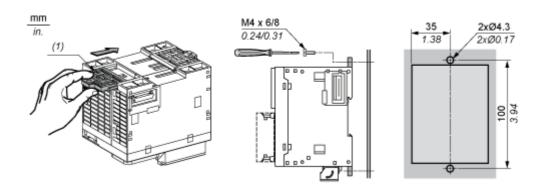


(1) Install a mounting strip


## Mounting

#### **Correct Mounting Position**







# **Acceptable Mounting Position**




## **Incorrect Mounting Position**









## Clearance





#### Connections and Schema

# **Digital Inputs**



(1) The COM0 terminals are connected internally.


A: Sink wiring (positive logic).

B: Source wiring (negative logic).




lx 10, 11, 16, 17


## **Digital Outputs**

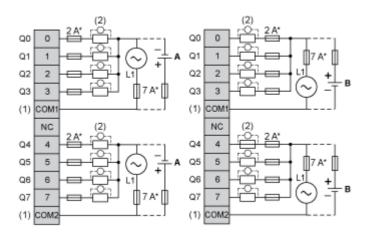

- (\*) Type T fuse
- (1) The COM1 and COM2 terminals are not connected internally.
- (2) To improve the life time of the contacts, and to protect from potential inductive load damage, you must connect a free wheeling diode in parallel to each inductive DC load or an RC snubber in parallel of each inductive AC load
- A: Source wiring (negative logic).
- B: Sink wiring (positive logic).

## **Analog Inputs**




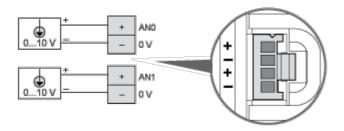


The (-) poles are connected internally.

Pin	Wire Color
AN0 / AN1	Red
0 V	Black

## **USB Mini-B Connection**

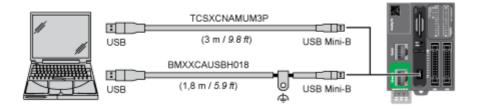

## **SL1 Connection**




SL1


Ν°	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1
5	N.C.	D0
6	стѕ	N.C.
7	N.C.*	5 Vdc
8	Common	Common

N.C.: not connected

 $<sup>\</sup>ensuremath{^*}$  : 5 Vdc delivered by the controller. Do not connect.

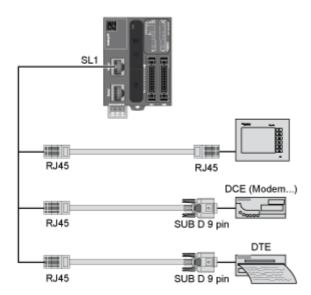

## **SL2 Connection**



Ν°	RS 485
1	N.C.
2	N.C.
3	N.C.
4	D1
5	D0
6	N.C.
7	N.C.
8	Common

N.C.: not connected