

Product datasheet

Specifications



logic controller, Modicon M258,
compact base, 42 IO, 24V DC,
CANopen

TM258LF42DT

Main

| | |
|------------------------------|----------------------------|
| Range of product | Modicon M258 |
| product or component type | Logic controller |
| Product specific application | - |
| Discrete I/O number | 42 |
| Discrete output number | 12 output 4 fast output |

Complementary

| | |
|---|---|
| Discrete input number | 10 for fast input 12 for input 4 for regular input |
| Discrete input logic | Sink for fast input Sink for regular input Source for input |
| Discrete input voltage | 24 V |
| Discrete input voltage type | DC |
| Voltage state 1 guaranteed | >= 15 V for fast input >= 15 V for fast output >= 15 V for regular input |
| Voltage state 0 guaranteed | <= 5 V for fast input <= 5 V for fast output <= 5 V for regular input |
| Discrete input current | 4 mA for fast input 4 mA for regular input |
| Input impedance | 6 kOhm for fast input 6 kOhm for regular input |
| Configurable filtering time | 0 ms for fast input/regular input and fast output 1.5 ms for fast input/regular input and fast output 12 ms for fast input/regular input and fast output 4 ms for fast input/regular input and fast output |
| Anti bounce filtering | 2 µs...4 ms configurable fast input/regular input and fast output |
| Maximum cable distance between devices | <30 m for fast input <30 m for fast output <30 m for regular input |
| Isolation between channels and internal logic | 500 Vrms AC |
| Isolation between channels | None |
| Discrete output logic | Source |
| Discrete output voltage | 24 V DC |
| Output voltage limits | 19.2...28.8 V |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|--------------------------------|--|
| Discrete output current | 4 mA for fast output |
| [Us] rated supply voltage | 24 V DC for embedded expert modules power 24 V DC for I/O power segment 24 V DC for main supply |
| Supply voltage limits | 20.4...28.8 V |
| [In] rated current | 0.04 A for embedded expert modules power 10 A for I/O power segment 0.26 A for main supply |
| Peak current | 100 kA (duration = <= 70 s) for main supply 25 kA (duration = <= 500 s) for I/O power segment 50 kA (duration = <= 150 s) for embedded expert modules power 1.2 A (duration = > 70 s) for main supply |
| maximum power consumption in W | 13.03 W |
| Memory description | Flash 128 MB Internal RAM 64 MB |
| Realtime clock | Without any user calibration clock, clock drift < 30 s/month at 25 °C With user calibration clock, clock drift <= 6 s/month |
| Data backed up | Variables of type retain and retain persistent CR2477M Renata, 1.5 years autonomy |
| Integrated connection type | 1 isolated serial link with female RJ45 connectorModbus with master/slave RTU/ ASCII or character mode ASCII, physical interface: RS232/RS485, transmission rate: 300...115200 bps 1 isolated serial link with female RJ45 connectorEthernet Modbus TCP/IP with slave, physical interface: 10BASE-T/100BASE-TX 1 isolated serial link with mini B USB connector, transmission rate: 480 Mbit/s 1 isolated serial link with USB type A connector, transmission rate: 480 Mbit/s 1 CANopen with male SUB-D 9 connectorCANopen with master |
| Transmission rate | 125 kbit/s for bus length of 500 m for CANopen 250 kbit/s for bus length of 250 m for CANopen 50 kbit/s for bus length of 1000 m for CANopen 500 kbit/s for bus length of 100 m for CANopen 10 kbit/s for bus length of 5000 m for CANopen 1000 kbit/s for bus length of 4 m for CANopen 20 kbit/s for bus length of 2500 m for CANopen 800 kbit/s for bus length of 25 m for CANopen |
| Counting input number | 8 counting input(s) at 200 kHz |
| Local signalling | 1 LED per channel for I/O state 1 LED for CAN0 STS 1 LED for MBS COM 1 LED green/red for APP0 1 LED green/red for APP1 1 LED green/red for Eth NS (Ethernet network status) 1 LED green/red for Eth ST (Ethernet status) 1 LED green/red for RUN/MS (module status) 1 LED green/red for USB host 1 LED green/yellow for Eth LA (Ethernet activity) 1 LED red for BATT (battery status) |
| marking | CE |
| mounting support | Symmetrical DIN rail |
| Width | 175 mm |
| Height | 99 mm |
| Depth | 85 mm |
| net weight | 0.55 kg |

Environment

| | |
|-----------|---|
| Standards | UL 508 CSA C22.2 No 142 IEC 61131-2 CSA C22.2 No 213 |
|-----------|---|

| | |
|---------------------------------------|---|
| Product certifications | GOST-R cULus C-Tick CSA |
| Ambient air temperature for operation | 0...55 °C without derating (horizontal installation) 0...60 °C with derating factor (horizontal installation) 0...50 °C (vertical installation) |
| Ambient air temperature for storage | -25...70 °C |
| Relative humidity | 5...95 % without condensation |
| IP degree of protection | IP20 conforming to IEC 61131-2 |
| Pollution degree | 2 conforming to IEC 60664 |
| Operating altitude | 0...2000 m |
| Storage altitude | 0...3000 m |
| Vibration resistance | 1 gn at 8.4...150 Hz on DIN rail 3.5 mm at 5...8.4 Hz on DIN rail |
| Shock resistance | 15 gn for 11 ms |
| Resistance to electrostatic discharge | 4 kV on contact conforming to IEC 61000-4-2 8 kV in air conforming to IEC 61000-4-2 |
| Resistance to electromagnetic fields | 1 V/m 2...2.7 GHz conforming to IEC 61000-4-3 10 V/m 80...2000 MHz conforming to IEC 61000-4-3 |
| Resistance to fast transients | 1 kV (I/O) conforming to IEC 61000-4-4 1 kV (shielded cable) conforming to IEC 61000-4-4 2 kV (power lines) conforming to IEC 61000-4-4 |
| Surge withstand | 0.5 kV differential mode conforming to IEC 61000-4-5 1 kV common mode conforming to IEC 61000-4-5 |
| Disturbance radiated/conducted | CISPR 11 |

Packing Units

| | |
|------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 13.400 cm |
| Package 1 Width | 16.000 cm |
| Package 1 Length | 31.500 cm |
| Package 1 Weight | 781.000 g |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 6 |
| Package 2 Height | 30.000 cm |
| Package 2 Width | 40.000 cm |
| Package 2 Length | 60.000 cm |
| Package 2 Weight | 5.570 kg |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability





Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.


[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance

| | | |
|---|----------------------------|---|
|  | Toxic Heavy Metal Free | |
|  | Mercury Free | |
|  | Rohs Exemption Information | Yes |
|  | Pvc Free | |
| | | |
| Reach Regulation | | REACH Declaration |
| | | |
| Eu Rohs Directive | | Pro-active compliance (Product out of EU RoHS legal scope) |
| | | |
| China Rohs Regulation | | China RoHS declaration |
| | | |
| Weee | | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

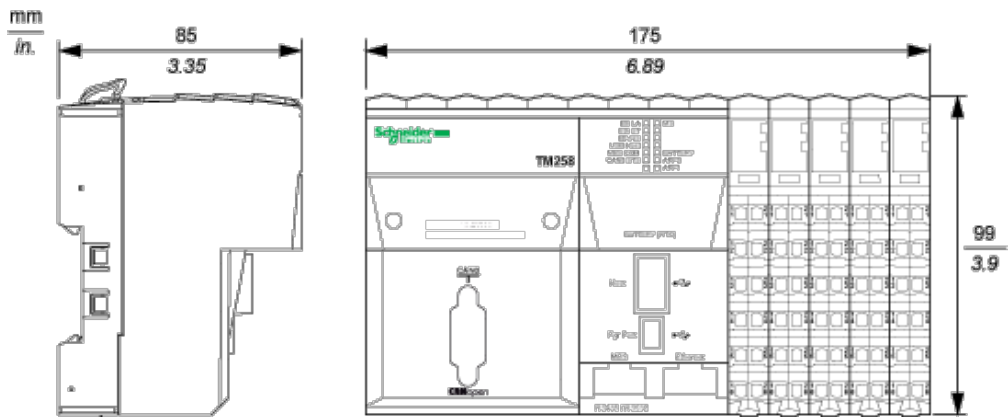


Dimensions



Connections and Schema


TM5 System Wiring Recommendations

Wire Sizes to Use with Removable Spring Terminal Blocks

|  |  |  |  |  |
|---|---|---|---|---|
| mm ² | 0,08...2,5 | 0,25...2,5 | 0,25...1,5 | 2 x 0,25...2 x 0,75 |
| AWG | 28...14 | 24...14 | 24...16 | 2 x 24...2 x 18 |

External Power Supplies

Wiring Diagram of the Controller Power Distribution Module

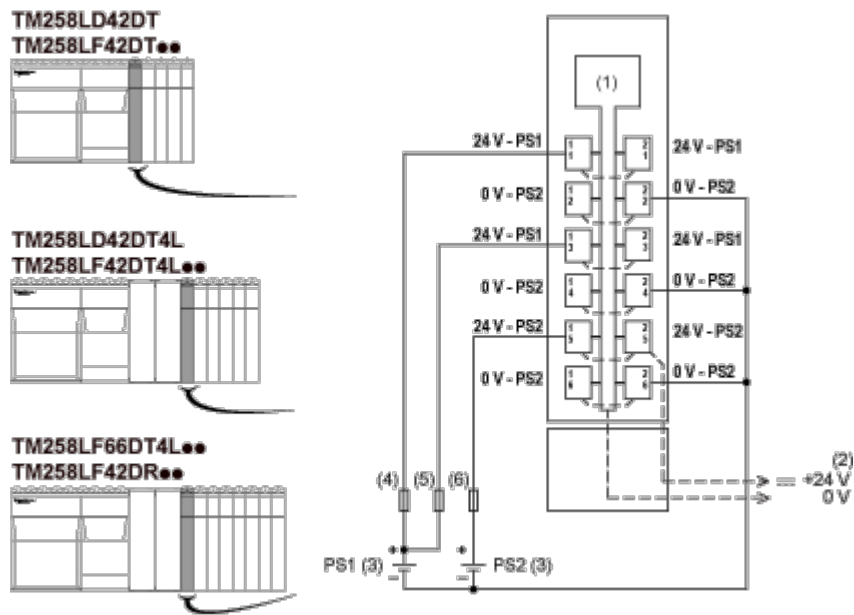

- (1) Internal electronics
- (2) 24 Vdc I/O power segment integrated into the bus bases
- (3) PS1/PS2: External isolated SELV power supply 24 Vdc
- (4) External fuse, Type T slow-blow, 3 A 250 V
- (5) External fuse, Type T slow-blow, 2 A 250 V
- (6) External fuse, Type T slow-blow, 10 A max., 250 V