Product data sheet

Specifications





discrete output module, Modicon TM3, 32 outputs transistor PNP, HE10

TM3DQ32TK

Product availability: Stock - Normally stocked in distribution

Price*: 219.00 USD

Main

Range Of Product	Modicon TM3	
Product Or Component Type	Discrete output module	
Range Compatibility	Modicon M241 Modicon M251 Modicon M221 Modicon M262	
Discrete Output Type	Transistor	
Discrete Output Number	32	
Discrete Output Logic	Positive logic (source)	
Discrete Output Voltage	24 V DC transistor output	
Discrete Output Current	100 mA transistor output	

Complementary

o o mpromontary	
Discrete I/O Number	32
Current Consumption	5 mA 5 V DC via bus connector at state off) 0 mA 24 V DC via bus connector at state off) 25 mA 5 V DC via bus connector at state on) 40 mA 24 V DC via bus connector at state on)
Response Time	450 μs (turn-on) 450 μs (turn-off)
Maximum Leakage Current	0.1 mA transistor output
Maximum Voltage Drop	<0.4 V
Maximum Tungsten Load	<1.2 W transistor output
Local Signalling	for output status 1 LED per channel (green)
Electrical Connection	HE-10 connector for outputs
Maximum Cable Distance Between Devices	Unshielded cable <16.40 ft (5 m) transistor output
Insulation	Between output and internal logic 500 V AC Non-insulated between outputs
Marking	CE
Mounting Support	Top hat type TH35-15 rail IEC 60715 Top hat type TH35-7.5 rail IEC 60715 plate or panel with fixing kit
Height	3.54 in (90 mm)
Depth	3.20 in (81.3 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Width	1.32 in (33.5 mm)
Net Weight	0.25 lb(US) (0.112 kg)

Environment

Product Certifications Resistance To Electrostatic Discharge	cULus CE UKCA RCM EAC cULus HazLoc
	UKCA RCM EAC
	RCM EAC
	EAC
	EAC
Discharge	8 kV in air IEC 61000-4-2
	4 kV on contact IEC 61000-4-2
Resistance To Electromagnetic	9.14 V/m (10 V/m) 80 MHz1 GHz IEC 61000-4-3
Fields	2.74 V/m (3 V/m) 1.4 GHz2 GHz IEC 61000-4-3
	0.91 V/m (1 V/m) 2 GHz3 GHz IEC 61000-4-3
Resistance To Magnetic Fields	98.43 A/m (30 A/m) 50/60 Hz IEC 61000-4-8
Resistance To Fast Transients	1 kV I/OIEC 61000-4-4
Surge Withstand	1 kV I/O common mode IEC 61000-4-5 DC
Resistance To Conducted	10 V 0.1580 MHz IEC 61000-4-6
Disturbances	3 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) Marine
	specification (LR, ABS, DNV, GL)
Electromagnetic Emission	Radiated emissions 40 dBμV/m QP class A 10 m)30230 MHz IEC 55011
	Radiated emissions 47 dBµV/m QP class A 10 m)2301000 MHz IEC 55011
Ambient Air Temperature For	1495 °F (-1035 °C) vertical installation
Operation	14131 °F (-1055 °C) horizontal installation
Ambient Air Temperature For Storage	-13158 °F (-2570 °C)
Relative Humidity	1095 %, without condensation in operation)
	1095 %, without condensation in storage)
lp Degree Of Protection	IP20 with protective cover in place
Pollution Degree	2
Operating Altitude	06561.68 ft (02000 m)
Storage Altitude	0.009842.52 ft (03000 m)
Vibration Resistance	3.5 mm 58.4 Hz DIN rail
	3 gn 8.4150 Hz DIN rail
	3.5 mm 58.4 Hz panel
	3 gn 8.4150 Hz panel

Ordering and shipping details

Category	US10MSX22533	
Discount Schedule	OMSX	
Gtin	3606480611513	
Returnability	Yes	
Country Of Origin	US	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

Package 1 Height	2.96 in (7.525 cm)
Package 1 Width	4.20 in (10.661 cm)
Package 1 Length	5.07 in (12.89 cm)
Package 1 Weight	7.76 oz (220.0 g)
Unit Type Of Package 2	CAR
Number Of Units In Package 2	42
Package 2 Height	11.65 in (29.6 cm)
Package 2 Width	15.59 in (39.6 cm)
Package 2 Length	22.20 in (56.4 cm)
Package 2 Weight	22.75 lb(US) (10.32 kg)
Unit Type Of Package 3	P12
Number Of Units In Package 3	504
Package 3 Height	29.53 in (75 cm)
Package 3 Width	47.24 in (120 cm)
Package 3 Length	31.50 in (80 cm)
Package 3 Weight	305.12 lb(US) (138.4 kg)



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


②	Toxic Heavy Metal Free
Ø	Mercury Free
Ø	Rohs Exemption Information Yes
Ø	Pvc Free

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Dimensions

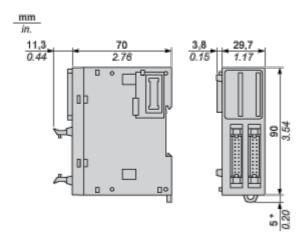


(*) 8.5 mm/0.33 in. when the clamp is pulled out.


Product data sheet

TM3DQ32TK


Mounting and Clearance

Spacing Requirements







Mounting on a Rail



Incorrect Mounting

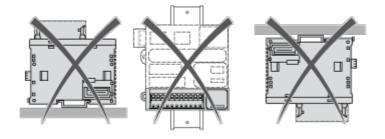


Mounting on a Panel Surface



(1) Install a mounting strip

Mounting Hole Layout

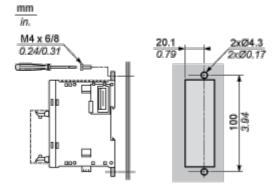



TM3DQ32TK

Connections and Schema

Digital Transistor Output Module (32-channel, Source)

Wiring Diagram

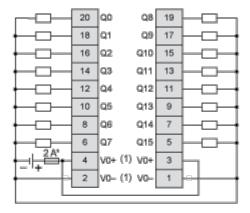



- (*) Type T fuse
- (1) The V0+ terminals are connected internally.

The V0- terminals are connected internally.

The V1+ terminals are connected internally.

The V1- terminals are connected internally.

The V0+ and V1+ terminals are not connected internally.

The V0- and V1- terminals are not connected internally.