Specifications





analog input module, Modicon TM5, 4I, +/-10V, 0 to 20mA, 16bits

TM5SAI4H

Product availability: Stock - Normally stocked in distribution facility

Price*: 840.00 USD

Main

Range Of Product	Modicon TM5			
Product Or Component Type	Analog input module			
Analogue Input Number	4			
Analogue Input Type	current 020 mA differential voltage +/- 10 V differential			
Analogue Input Resolution	15 bits + sign +/- 10 V 15 bits 020 mA			

Complementary

Complementary				
Range Compatibility	Modicon LMC058 Modicon M258			
Product Compatibility	Motion controller Logic controller			
Measurement Resolution	305 μV, +/- 10 V 610 nA, 020 mA			
Color	White			
Input Impedance	>= 20 mOhm voltage			
Load Impedance Ohmic	<= 400 Ohm current)			
Sampling Duration	50 µs			
Measurement Error	< 0.08 % of full scale +/- 10 V +/- 10 V 25 °C < 0.08 % of full scale 020 mA 020 mA 25 °C			
Temperature Coefficient	0.01 %FS/°C			
Non-Linearity	< 0.01 %FS voltage < 0.015 %FS current			
Type Of Cable	Shielded cable			
Isolation	500 Vrms AC insulation between channel and bus No insulation between channels			
Supply	Internal			
[Us] Rated Supply Voltage	24 V DC -1520 %			
Common Mode Rejection	> 70 dB			
Local Signalling	1 LED green power supply 1 LED red power supply 4 LEDs green input status			
Current Consumption	2 mA 5 V DC bus 63 mA 24 V DC input/output			
Maximum Power Dissipation In W	1 51 W			

Maximum Power Dissipation In W 1.51 W

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Marking	CE	
Net Weight	0.06 lb(US) (0.025 kg)	

Environment

Environment					
Standards	CSA C22.2 No 213 IEC 61131-2 CSA C22.2 No 142 UL 508				
Product Certifications	CSA C-tick GOST-R cULus				
Ambient Air Temperature For Operation	32131 °F (055 °C) without derating horizontal installation) 32140 °F (060 °C) with derating factor horizontal installation) 32122 °F (050 °C) vertical installation)				
Ambient Air Temperature For Storage	-13158 °F (-2570 °C)				
Relative Humidity	595 % without condensation				
Ip Degree Of Protection	IP20IEC 61131-2				
Pollution Degree	2 IEC 60664				
Operating Altitude	06561.68 ft (02000 m)				
Storage Altitude	0.009842.52 ft (03000 m)				
Vibration Resistance	1 gn 8.4150 Hz DIN rail 3.5 mm 58.4 Hz DIN rail				
Shock Resistance	15 gn 11 ms				
Resistance To Electrostatic Discharge	4 kV on contact IEC 61000-4-2 8 kV in air IEC 61000-4-2				
Resistance To Electromagnetic Fields	0.91 V/m (1 V/m) 22.7 GHz IEC 61000-4-3 9.14 V/m (10 V/m) 802000 MHz IEC 61000-4-3				
Resistance To Fast Transients	1 kV IEC 61000-4-4 I/O) 1 kV IEC 61000-4-4 shielded cable) 2 kV IEC 61000-4-4 power lines)				
Surge Withstand	0.5 kV differential mode IEC 61000-4-5 1 kV common mode IEC 61000-4-5				
Electromagnetic Compatibility	EN/IEC 61000-4-6				
Disturbance Radiated/Conducted	CISPR 11				

Ordering and shipping details

Category	US1PC1222532		
Discount Schedule	PC12		
Gtin	3595864074740		
Returnability	Yes		
Country Of Origin	AT		

Packing Units

Unit Type Of Package 1	PCE	
Number Of Units In Package 1	1	
Package 1 Height	0.79 in (2.000 cm)	
Package 1 Width	2.36 in (6.000 cm)	

Package 1 Length	4.13 in (10.500 cm)		
Package 1 Weight	1.45 oz (41.000 g)		
Unit Type Of Package 2	\$02		
Number Of Units In Package 2	97		
Package 2 Height	5.91 in (15.000 cm)		
Package 2 Width	11.81 in (30.000 cm)		
Package 2 Length	15.75 in (40.000 cm)		
Package 2 Weight	9.50 lb(US) (4.310 kg)		

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes
Pvc Free


Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			
Circularity Profile	End of Life Information			
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			

Dimensions Drawings

TM5 Slice

Dimensions




TM5SAI4H


Mounting and Clearance

TM5 System

Spacing Requirements

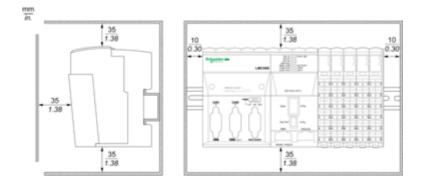

Mounting on a DIN Rail

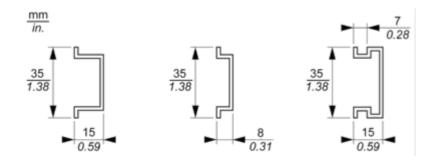

Connections and Schema


TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm in.	0.35		2		ġ
	mm ²	0,082,5	0,252,5	0,251,5	2 x 0,252 x 0,75
	AWG	2814	2414	2416	2 x 242 x 18

Electronic Module 4AI ±10V/0-20mA 16 Bits

Wiring Diagram

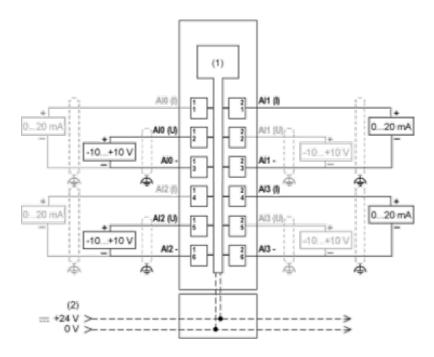

(1) Internal electronics

(2) 24 Vdc I/O power segment integrated into the bus bases

(I) Current

(U) Voltage

Condition of Installation

Do not place 16-bit analog input modules side-by-side because their electromagnetic characteristics may lead to mutual interference and possible unintended equipment operation. Further, other types of equipments can generate similar electromagnetic interference affecting the conversion accuracy of the modules. In the physical configuration, a single slice of non-interfering equipment is sufficient to avoid this type of disturbance. Separate the 16-bit analog modules from each other and from the following equipment:

- TM5SBER2 Bus receiver
- TM5SPS2 and TM5SPS2F Power Distribution Modules
- TM258 and LMC058 Controllers