Product data sheet

Specifications





remote transmitter module, Modicon TM5, communication between RIO

TM5SBET1

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 165.00 USD

Main

Range of Product	Modicon TM5	
Product or Component Type	Remote transmitter module	
Product Specific Application	Communication between remote I/O	

Complementary

Range Compatibility	Modicon M258 Modicon LMC058	
Product Compatibility	Logic controller Motion controller	
Color	White	
Bus length	8202.10 ft (2500 m)	
Maximum cable distance between devices	en 328.08 ft (100 m)	
Current consumption	25 mA 24 V DC input/output 100 mA 5 V DC bus	
Maximum power dissipation in W	1.1 W	
Local signalling	LED green power supply LED red power supply LED yellow communication data bus	
marking	CE	
Net Weight	0.055 lb(US) (0.025 kg)	

Environment

Standards	UL 508 IEC 61131-2 CSA C22.2 No 213 CSA C22.2 No 142			
Product Certifications	cULus GOST-R CSA C-tick			
Ambient air temperature for operation	32.000000000122.0000000000 °F (050 °C) vertical installation) 32.000000000131.0000000000 °F (055 °C) without derating horizontal installation) 32.000000000140.0000000000 °F (060 °C) with derating factor horizontal installation)			
Ambient Air Temperature for Storage	-13.0000000000158.0000000000 °F (-2570 °C)			
elative Humidity 595 % without condensation				

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

IP degree of protection	IP20IEC 61131-2 IP67			
Pollution degree	2 IEC 60664			
Operating altitude	06561.68 ft (02000 m)			
Storage altitude	0.0000000009842.5 ft (03000 m)			
Vibration resistance	1 gn 8.4150 Hz DIN rail 3.5 mm 58.4 Hz DIN rail			
Shock resistance	15 gn 11 ms			
Resistance to electrostatic discharge	4 kV on contact IEC 61000-4-2 8 kV in air IEC 61000-4-2			
Resistance to electromagnetic fields	0.9 V/m (1 V/m) 22.7 GHz IEC 61000-4-3 9.1 V/m (10 V/m) 802000 MHz IEC 61000-4-3			
Resistance to fast transients	1 kV IEC 61000-4-4 I/O) 1 kV IEC 61000-4-4 shielded cable) 2 kV IEC 61000-4-4 power lines)			
Surge withstand	0.5 kV differential mode IEC 61000-4-5 1 kV common mode IEC 61000-4-5			
Electromagnetic compatibility	EN/IEC 61000-4-6			
Disturbance radiated/conducted	CISPR 11			

Ordering and shipping details

Category	US1PC1222532	
Discount Schedule	PC12	
GTIN	3595864074887	
Returnability	No	
Country of origin	US	

Packing Units

•		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	0.787 in (2.000 cm)	
Package 1 Width	2.362 in (6.000 cm)	
Package 1 Length	4.134 in (10.500 cm)	
Package 1 Weight	1.270 oz (36.000 g)	
Unit Type of Package 2	S02	
Number of Units in Package 2	97	
Package 2 Height	5.906 in (15.000 cm)	
Package 2 Width	11.811 in (30.000 cm)	
Package 2 Length	15.748 in (40.000 cm)	
Package 2 Weight	8.818 lb(US) (4.000 kg)	

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

⊘	Toxic Heavy Metal Free	
Ø	Mercury Free	
Ø	Rohs Exemption Information Y	res
Ø	Pvc Free	

Certifications & Standards


Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			
Circularity Profile				

TM5SBET1

Dimensions Drawings

TM5 Slice


Dimensions




Mounting and Clearance


TM5 System


Spacing Requirements






Mounting on a DIN Rail







Product data sheet

TM5SBET1

Connections and Schema


TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm in.	0.35	0	2		
	mm²	0,082,5	0,252,5	0,251,5	2 x 0,252 x 0,75
	AWG	2814	2414	2416	2 x 242 x 18

Transmitter Electronic Module

Wiring Diagram

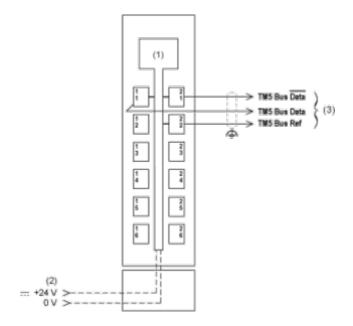

- (1) Internal electronics
- (2) 24 Vdc I/O power segment integrated into the bus bases
- (3) TM5 expansion bus cable (TCSXCNNXNX100)