

Product data sheet

Specifications



Modular base controller, Twido,
24VDC supply, 40 discrete I/O,
19W, 9 bits resolution, 8 output
source

TWDLMDA40DTK

⚠ Discontinued - Service only

⚠ Discontinued on: Dec 31, 2016

⚠ End-of-service on: Jun 29, 2023

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Twido
Product or Component Type	Modular base controller
Discrete I/O number	40
Discrete input number	24
Discrete input logic	Sink or source
Discrete input voltage	24 V
Discrete input voltage type	DC
Discrete output number	16 transistor source)
[Us] rated supply voltage	24 V DC
Maximum Number of I/O Expansion Module	7
Free slots	2
Use of slot	32 K or 64 K memory cartridge and 1 realtime clock

Complementary

Input voltage limits	20.4...26.4 V
Discrete input current	5 mA I0.0 to I0.1 5 mA I0.6 to I0.7 7 mA I0.2 to I0.5 7 mA I0.8 to I0.23
Input impedance	4700 Ohm I0.2 to I0.5 4700 Ohm I0.8 to I0.23 5700 Ohm I0.0 to I0.1 5700 Ohm I0.6 to I0.7
Filter time	150 µs for I0.2 to I0.5 at state 0 150 µs for I0.8 to I0.23 at state 0 35 µs for I0.0 to I0.1 at state 1 35 µs for I0.6 to I0.7 at state 1 40 µs for I0.2 to I0.5 at state 1 40 µs for I0.8 to I0.23 at state 1 45 µs for I0.0 to I0.1 at state 0 45 µs for I0.6 to I0.7 at state 0
Insulation between channel and internal logic	1500 Vrms for 1 minute
Insulation resistance between channel	None

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Discrete output voltage	24 V
Output voltage limits	20.4...28.8 V
Current per channel	0.36 A transistor output
Maximum current per output common	1 A transistor output
Response Time	300 µs for Q0.2 to Q0.15 at state 0 300 µs for Q0.2 to Q0.15 at state 1 5 µs for Q0.0 to Q0.1 at state 0 5 µs for Q0.0 to Q0.1 at state 1
[Ures] residual voltage	1 V at state 1
Maximum leakage current	0.1 mA
Output overvoltage protection	39 V
Maximum tungsten load	8 W
Discrete output current	300 mA
I/O connection	HE-10 connector
Maximum input/output number	152 removable screw terminal block with I/O expansion module 208 spring terminal block with I/O expansion module 264 HE-10 connector with I/O expansion module
Supply voltage limits	20.4...26.4 V
Protection type	Power protection internal fuse
Maximum power consumption in W	19 W base + 4 expansion module
Inrush current	1 A transistor output 50 A power supply
Insulation resistance	> 10 MOhm at 500 V, between I/O and earth terminals > 10 MOhm at 500 V, between supply and earth terminals
Program memory	3000 instructions 6000 instructions with 64 K memory cartridge
Exact time for 1 Kinstruction	1 ms
System overhead	0.5 ms
Memory description	Internal RAM, 128 counters, no floating, no trigonometrical Internal RAM, 128 timers, no floating, no trigonometrical Internal RAM, 256 internal bits, no floating, no trigonometrical Internal RAM, 3000 internal words, no floating, no trigonometrical Internal RAM, double words, no floating, no trigonometrical Internal RAM, floating, trigonometrical
Battery type	Lithium internal RAM 30 days 15 h 10 year(s)
Integrated connection type	Power supply Non isolated serial link mini DIN, Modbus/character mode master/slave RTU/ASCII RS485) half duplex, 38.4 kbit/s
Counting input number	2 20000 Hz 32 bits 2 5000 Hz 16 bits
Positioning functions	PWM/PLS 2 7 kHz
Analogue input number	1
Analogue input range	0...10 V
Analogue input resolution	9 bits
Input impedance	100000 Ohm
Complementary function	Event processing PID
Analogue adjustment points	1 point adjustable from 0...1023

Status LED	1 LED ERR 1 LED STAT 1 LED (Green) PWR 1 LED (Green) RUN 1 LED per channel I/O status
Net Weight	0.40 lb(US) (0.18 kg)

Environment

Immunity to microbreaks	10 ms
Dielectric strength	1500 V for 1 minute, between I/O and earth terminals 500 V for 1 minute, between supply and earth terminals
Product Certifications	UL CSA
marking	CE
Ambient Air Temperature for Storage	-13.0000000000...158.0000000000 °F (-25...70 °C)
Ambient Air Temperature for Operation	32.0000000000...131.0000000000 °F (0...55 °C)
Relative humidity	30...95 % without condensation
IP Degree of Protection	IP20
Operating altitude	0...6561.68 ft (0...2000 m)
Storage altitude	0.0000000000...9842.5 ft (0...3000 m)
Vibration resistance	0.075 mm 10...57 Hz 35 mm symmetrical DIN rail 1 gn 57...150 Hz 35 mm symmetrical DIN rail 1.6 mm 2...25 Hz plate or panel with fixing kit 4 gn 25...100 Hz plate or panel with fixing kit
Shock resistance	15 gn 11 ms

Ordering and shipping details

Category	US1PC1222531
Discount Schedule	PC12
GTIN	3595862044714
Returnability	No
Country of origin	TW

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.0 in (7.5 cm)
Package 1 Width	4.1 in (10.5 cm)
Package 1 Length	4.9 in (12.5 cm)
Package 1 Weight	9.9 oz (281.0 g)
Unit Type of Package 2	S04
Number of Units in Package 2	30
Package 2 Height	11.8 in (30.0 cm)
Package 2 Width	15.7 in (40.0 cm)
Package 2 Length	23.6 in (60.0 cm)
Package 2 Weight	30.97 lb(US) (14.05 kg)


Unit Type of Package 3	S01
Number of Units in Package 3	6
Package 3 Height	5.9 in (15.0 cm)
Package 3 Width	5.9 in (15.0 cm)
Package 3 Length	15.7 in (40.0 cm)
Package 3 Weight	4.319 lb(US) (1.959 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings


Dimensions

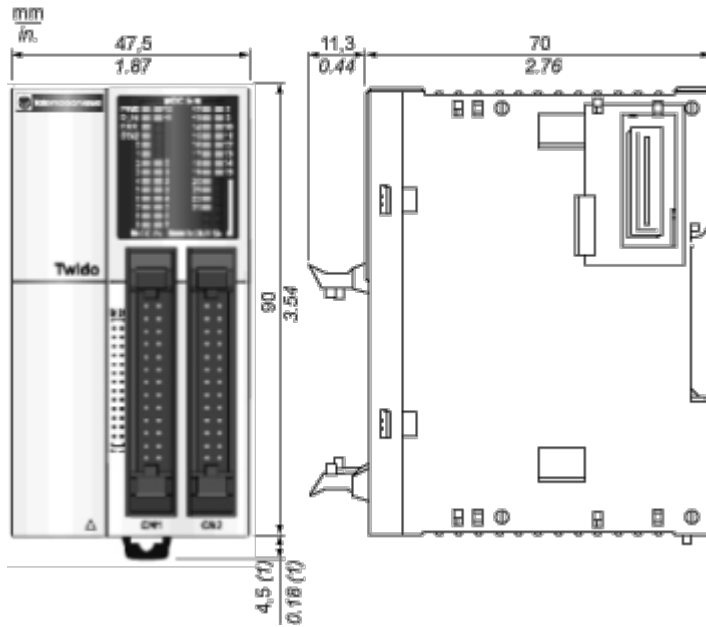


(1) 8.5 mm (0.33 in) when the clamp is pulled out.

Mounting and Clearance

Minimum Clearances for a Modular Base and Expansion I/O Modules

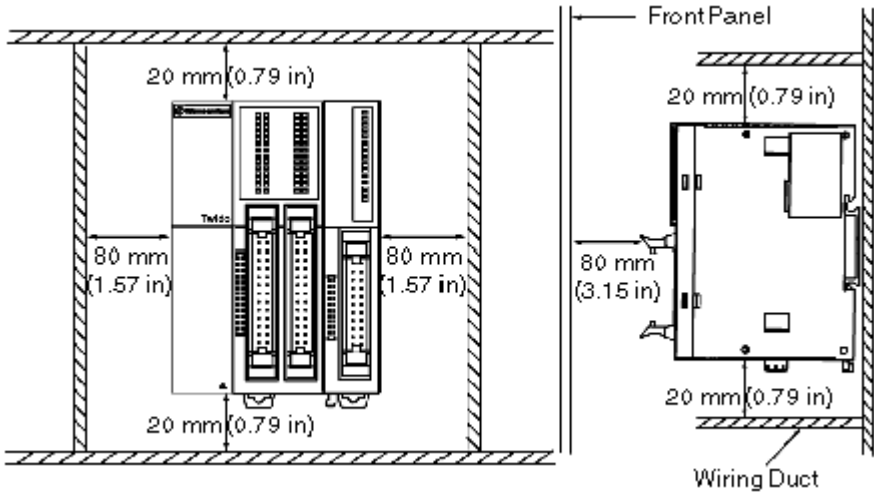


Mounting Hole Layout

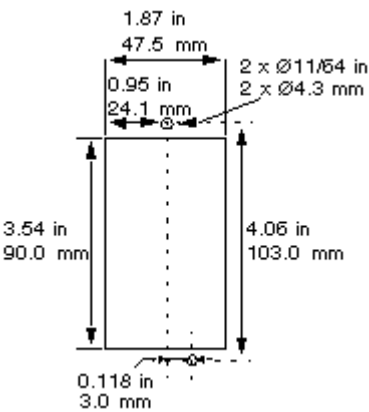


Connections and Schema

DC Power Supply Wiring



Wiring Diagram

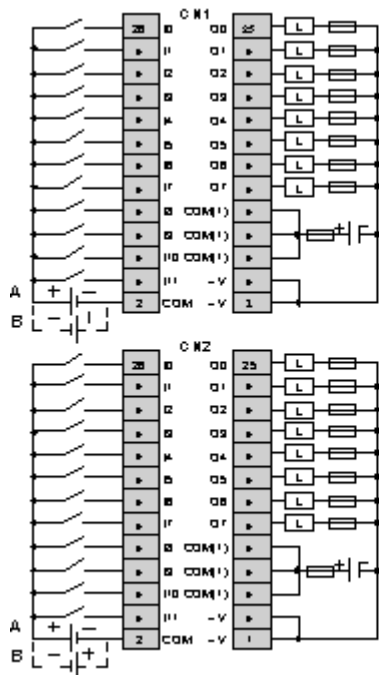


A Positive logic.

B Negative logic.

Performance Curves

Performance Curves

I/O Usage Limits

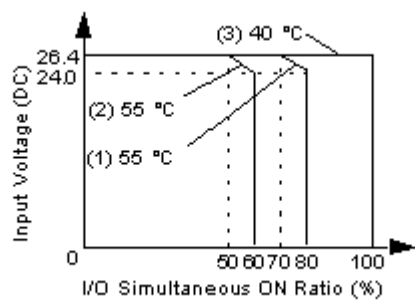

- (1) Limit for TWDLMDA20DUK and TWDLMDA20DTK
- (2) Limit for TWDLMDA40DUK and TWDLMDA40DTK
- (3) All modular bases