

# EMC input filter, Altivar, Lexium, 10.1A, 1 phase, 200…240V

VW3A4420

Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 94.80 USD

#### Main

Range of Product	Lexium Altivar
Product or Component Type	EMC input filter
Range Compatibility	Altivar 32 Altivar Machine ATV320 Lexium 28 Lexium 32
Product compatibility	ATV32, 200240 V, 0.180.75 kW LXM28A LXM32, single-phase, line current 2.95.4 A Variable speed drive ATV320B 0.18 kW, 200240 V, single phase Variable speed drive ATV320B 0.37 kW, 200240 V, single phase Variable speed drive ATV320B 0.55 kW, 200240 V, single phase Variable speed drive ATV320B 0.75 kW, 200240 V, single phase
Product Specific Application	Radio interference input filter
mounting location	At variable speed drive side
Phase	Single phase

# Complementary

Maximum cable distance between devices	65.6 ft (20 m) IEC 61800-3 category C1 164.04 ft (50 m) IEC 61800-3 category C2		
Line Rated Current	10.1 A		
Thermal losses	3.7 W		
Network rated voltage	200240 V		
Tolerance	- 1510 %		
Net Weight	1.3 lb(US) (0.6 kg)		
Emc filter compatibility	Type 020		

# Ordering and shipping details

Category	US1CP4B22152
Discount Schedule	CP4B
GTIN	3606480166877
Returnability	No
Country of origin	TH

### **Packing Units**

Unit Type of Package 1 PCE

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Number of Units in Package 1	1
Package 1 Height	1.969 in (5.000 cm)
Package 1 Width	7.165 in (18.200 cm)
Package 1 Length	9.134 in (23.200 cm)
Package 1 Weight	16.437 oz (466.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	11
Package 2 Height	11.811 in (30.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)
Package 2 Weight	12.672 lb(US) (5.748 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	88
Package 3 Height	29.528 in (75.000 cm)
Package 3 Width	23.622 in (60.000 cm)
Package 3 Length	31.496 in (80.000 cm)
Package 3 Weight	123.080 lb(US) (55.828 kg)

# **Contractual warranty**

Warranty 18 months

# Sustainability

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >


Guide to assess a product's sustainability >


# Well-being performance

<b>Ø</b>	Reach Free Of Svhc	
<b>Ø</b>	Toxic Heavy Metal Free	
<b>Ø</b>	Mercury Free	
	Rohs Exemption Information	Yes
Rea	ch Regulation	REACh Declaration
Eu F	Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Chir	na Rohs Regulation	China RoHS declaration
Calif	fornia Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

# **Dimensions Drawings**

#### **Additional EMC Input Filters**

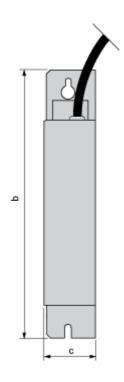

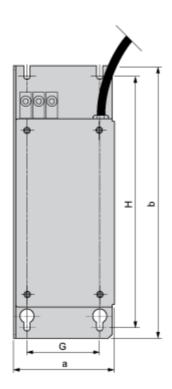

Dimensions in mm

а	b	С	G	Н	Ø
72	195	37	52	180	4.5

#### Dimensions in in.

			_		
а	b	С	G	H	Ø
2 83	7 68	1 16	2.05	7 00	0.18
2.03	1.00	1.40	2.03	1.09	0.10
		l	l	l	l 1

Mounting and Clearance


#### **Mounting Recommendations**

Mounting the Filter on the Side of the Drive



#### Connections and Schema

#### **Recommended Schema**

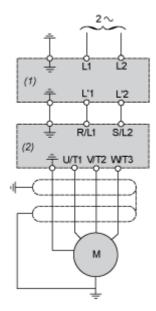

- (1) Filter
- (2) Drive