


## Specifications

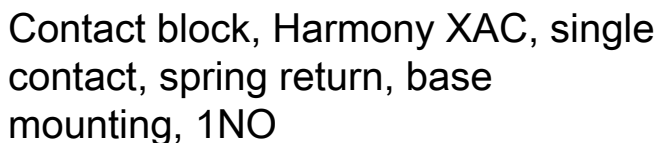

**Product availability: Stock - Normally stocked in distribution facility**

**Price\*: 28.60 USD**

Range Of Product	Harmony XAC
Product Or Component Type	Contact block
Component Name	XACS
Electrical Circuit Type	Control circuit
Contact Block Type	Single
Type Of Operator	Spring return
Product Compatibility	XACA
Contacts Type And Composition	1 NO
Mounting Of Block	Base mounting
Contact Operation	Slow-break

<b>Connections - Terminals</b>	Screw clamp terminals, 1 x 0.5...1 x 2.5 mm² without cable end Screw clamp terminals, 1 x 0.5...2 x 1.5 mm² with cable end
<b>Mechanical Durability</b>	1000000 cycles
<b>Contact Code Designation</b>	A600 AC-15, Ue = 240 V, Ie = 3 A IEC 60947-5-1 appendix A A600 AC-15, Ue = 600 V, Ie = 1.2 A IEC 60947-5-1 appendix A Q600 DC-13, Ue = 250 V, Ie = 0.27 A IEC 60947-5-1 appendix A Q600 DC-13, Ue = 600 V, Ie = 0.1 A IEC 60947-5-1 appendix A
<b>[Ithe] Conventional Enclosed Thermal Current</b>	10 A
<b>[Ui] Rated Insulation Voltage</b>	600 V 3) IEC 60947-1
<b>[Uimp] Rated Impulse Withstand Voltage</b>	6 kV IEC 60947-1
<b>Maximum Resistance Across Terminals</b>	25 MOhm
<b>Operating Force</b>	10 N
<b>Short-Circuit Protection</b>	10 A fuse protection cartridge gG
<b>Rated Operational Power In W</b>	40 W DC-13 1000000 cycles 60 cyc/mn 120 V 0.5 inductive IEC 60947-5-1 appendix C 48 W DC-13 1000000 cycles 60 cyc/mn 48 V 0.5 inductive IEC 60947-5-1 appendix C 65 W DC-13 1000000 cycles 60 cyc/mn 24 V 0.5 inductive IEC 60947-5-1 appendix C
<b>Terminals Description Iso N°1</b>	(13-14) NO

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Standards	UL 508 EN/IEC 60947-5-1 CSA C22.2 No 14
Ambient Air Temperature For Operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Vibration Resistance	15 gn 10...500 Hz)IEC 60068-2-6
Shock Resistance	100 gn IEC 60068-2-27
Overvoltage Category	Class II IEC 61140

## Ordering and shipping details

Category	US10CS222473
Discount Schedule	0CS2
Gtin	3389110645248
Returnability	Yes
Country Of Origin	MX

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.50 in (3.8 cm)
Package 1 Width	2.36 in (6.0 cm)
Package 1 Length	2.64 in (6.7 cm)
Package 1 Weight	1.31 oz (37.0 g)
Unit Type Of Package 2	S01
Number Of Units In Package 2	40
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	3.71 lb(US) (1.683 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes
Reach Regulation		<a href="#">REACH Declaration</a>
Eu Rohs Directive		Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
China Rohs Regulation		<a href="#">China RoHS declaration</a>
Weee		The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
California Proposition 65		WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>