Product data sheet

Specification





Empty control station, Harmony XALD, XALK, plastic, dark grey lid, light grey base, 3 cut out, UL CSA certified

XALD03H7

Product availability: Stock - Normally stocked in distribution facility

Price*: 49.00 USD

Main

Range Of Product	Harmony XALD	
Product Or Component Type	Empty control station	
Device Short Name	XALD	
Product Destination	For XB5 Ø 22 mm control and signalling units	
Number Of Cut-Out	3 cut-outs	
Colour Of Base Of Enclosure	Light grey RAL 7035)	
Colour Of Cover	Dark grey RAL 7016)	
Material	Polycarbonate	
Cable Entry	2 knock-outs for cable entry 0.55 in (14 mm) 2 knock-outs for Pg 13 cable gland and ISO M20 0.47 in (12 mm)	
Ip Degree Of Protection	IP66 IEC 60529 IP67 IP69 IP69K	

Complementary

Assembly Style	For customer assembly	
Number Of Horizontal Rows	1	
Number Of Vertical Rows	3	
Net Weight	0.52 lb(US) (0.238 kg)	
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m	
Mounting Of Block	Rear mounting Front mounting	
Electrical Composition Code	PF2 MR1 SF1 MF2 SF2 SR2 SR1 PR1 PF1	
Main Group	3 cut-outs	
Group Of Product	UL-CSA grey	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Protective Treatment	ТН	
Ambient Air Temperature For Storage	-40158 °F (-4070 °C)	
Ambient Air Temperature For Operation	-40158 °F (-4070 °C)	
Overvoltage Category	Class II IEC 60536	
Nema Degree Of Protection	NEMA 13 NEMA 4X	
Ik Degree Of Protection	IK03 conforming to IEC 62262	
Standards	IEC 60947-5-4 CSA C22.2 No 14 IEC 60947-5-1 JIS C8201-5-1 IEC 60947-1 IEC 60947-5-5 UL 508 JIS C8201-1	
Product Certifications	UL CSA	

Ordering and shipping details

Category	US10CS222475
Discount Schedule	0CS2
Gtin	3389110114942
Returnability	Yes
Country Of Origin	MX

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.76 in (7.000 cm)
Package 1 Width	3.07 in (7.800 cm)
Package 1 Length	5.51 in (14.000 cm)
Package 1 Weight	8.25 oz (234.000 g)
Unit Type Of Package 2	S03
Number Of Units In Package 2	30
Package 2 Height	11.81 in (30 cm)
Package 2 Width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	16.41 lb(US) (7.443 kg)
Unit Type Of Package 3	P06
Number Of Units In Package 3	240
Package 3 Height	30.31 in (77.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	148.69 lb(US) (67.445 kg)

Contractual warranty

Warranty

Jun 7, 2024

18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


⊘	Reach Free Of Svhc	
Ø	Toxic Heavy Metal Free	
⊘	Mercury Free	
⊘	Rohs Exemption Information	Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Dimensions Drawings

Dimensions

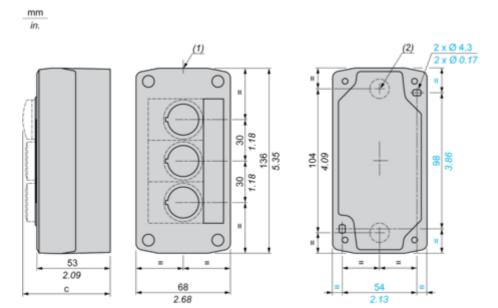

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in. (2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

Control station fitted with:	c in mm	c in in.
Flush pushbutton	62	2.44
Illuminated pushbutton	64	2.52
Pilot light	65.5	2.58
Projecting pushbutton	66	2.60
Selector switch	80	3.15
Key switch	105.5	4.15