# **Product datasheet**

Specification





Complete control station, Harmony XALD, XALK, dark grey, flush push buttons 22mm, green START 1NO red STOP 1NC, spring return

XALD215H7

#### Main

Range of product	Harmony XALD
Product or component type	Complete control station
Device short name	XALD
product destination	For XB5 Ø 22 mm control and signalling units
Control station application	Start-Stop function
Colour of base of enclosure	Light grey (RAL 7035)
Colour of cover	Dark grey (RAL 7016)
Material	Polycarbonate
Operator profile	2 flush push-buttons
Operators description	Green "START" 1 NO - red "STOP" 1 NC
Control station composition	1 flush push-button, green 1 NO START marking 1 flush push-button, red 1 NC STOP marking
marking location	Marking on push-button
Contact operation	Slow-break

### Complementary

Cable entry	2 knock-outs for cable entry, clamping capacity: 14 mm 2 knock-outs for Pg 13 cable gland and ISO M20, clamping capacity: 12 mm
Net weight	0.233 kg
Resistance to high pressure washer	7000000 Pa at 55 °C, distance : 0.1 m
Colour of marking	Black marking when white caps White marking when green, red or black caps
Positive opening	With conforming to IEC 60947-5-1 appendix K
Operating travel	1.5 mm (NC changing electrical state) 2.6 mm (NO changing electrical state) 4.3 mm (total travel)
Operating force	3.5 N NC changing electrical state 3.8 N NO changing electrical state
Mechanical durability	5000000 cycles
Connections - terminals	Screw clamp terminals, <= 2 x 1.5 mm² with cable end conforming to IEC 60947-1 Screw clamp terminals, >= 1 x 0.22 mm² without cable end conforming to IEC 60947-1
Tightening torque	0.81.2 N.m conforming to IEC 60947-1

Shape of screw head	Cross compatible with Philips no 1 screwdriver	
	Cross compatible with pozidriv No 1 screwdriver	
	Slotted compatible with flat Ø 4 mm screwdriver	
	Slotted compatible with flat Ø 5.5 mm screwdriver	
Contacts material	Silver alloy (Ag/Ni)	
Short-circuit protection	10 A cartridge fuse type gG conforming to IEC 60947-5-1	
[Ith] conventional free air thermal current	10 A conforming to IEC 60947-5-1	
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1	
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1	
[le] rated operational current	6 A at 120 V, AC-15, A600 conforming to IEC 60947-5-1	
	3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1	
	1.2 A at 600 V, AC-15, A600 conforming to IEC 60947-5-1	
	0.55 A at 125 V, DC-13, Q600 conforming to IEC 60947-5-1	
	0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1	
	0.1 A at 600 V, DC-13, Q600 conforming to IEC 60947-5-1	
Electrical durability	1000000 cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5	
	conforming to IEC 60947-5-1 appendix C	
	1000000 cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5	
	conforming to IEC 60947-5-1 appendix C	
	1000000 cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5	
	conforming to IEC 60947-5-1 appendix C	
	1000000 cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5	
	conforming to IEC 60947-5-1 appendix C	
	1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5	
	conforming to IEC 60947-5-1 appendix C	
Electrical reliability	$\Lambda$ < 10exp(-6) at 5 V, 1 mA conforming to IEC 60947-5-4	
	Λ < 10exp(-8) at 17 V, 5 mA conforming to IEC 60947-5-4	
Environment		
protective treatment	TH	
•		
Ambient air temperature for storage	-4070 °C	
Ambient air temperature for operation	-4070 °C	
Overvoltage category	Class II conforming to IEC 60536	
IP degree of protection	IP66 conforming to IEC 60529	
	IP67	
	IP69	
	IP69K	
NEMA degree of protection	NEMA 13	
	NEMA 4X	
IK degree of protection	IK03 conforming to IEC 62262	
	-	

# **Packing Units**

**Product certifications** 

Vibration resistance

Shock resistance

Standards

5 gn (f= 12...500 Hz) conforming to IEC 60068-2-6

30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC

50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC

IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-1 JIS C8201-5-1 IEC 60947-5-4 UL 508 IEC 60947-5-5 JIS C8201-1

CSA UL listed

60068-2-27

60068-2-27

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.8 cm
Package 1 Width	7.0 cm
Package 1 Length	11.0 cm
Package 1 Weight	234.0 g

## Sustainability Green Premium\*

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance

<b>⊘</b>	Reach Free Of Svhc	
<b>9</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes

### **Certifications & Standards**


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

9 Aug 2024

### XALD215H7

#### **Dimensions Drawings**

#### **Dimensions**

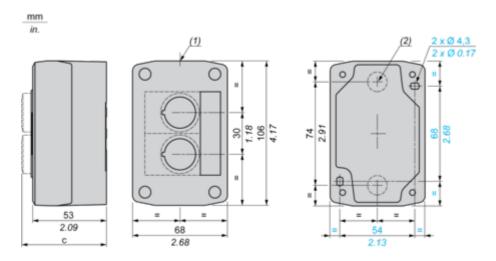

(1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm/0.47 in.

(2) Knock-out for cable entry, maximum capacity 14 mm/0.55 in.

Control station fitted with:	c in mm	c in in.
Flush pushbutton	62	2.44
Pilot light	64	2.52
Illuminated pushbutton	65.5	2.58
Projecting pushbutton	66	2.60
Selector switch	80	3.15
Mushroom head pushbutton	91.5	3.58
Latching mushroom head Emergency stop pushbutton wit h key	115	4.53
Key switch	105.5	4.15