

Product data sheet

Specifications



Front plate with fixing screws,
Harmony XAP, metal, 2 cut-outs,
22mm, 72 x 105 mm

XAPE302

Product availability: Non-Stock - Not normally stocked in
distribution facility

Price*: 60.00 USD

Main

| | |
|-------------------------------|---|
| Range of Product | Harmony XAP |
| Product or Component Type | Front plate with fixing screws |
| Device short name | XAPE |
| Product destination | For Ø 22 mm control and signalling units |
| Product front plate size | 72 x 105 mm |
| Number of cut-out | 2 cut-outs |
| Material | Anodised aluminium |
| Device mounting | Flush |
| IP degree of protection | IP65 IEC 60529 IP657 NF C 20-010 |
| Resistance to chemical agents | Good resistant to acetone Good resistant to alcohols Good resistant to chloride and fluoride solvents Good resistant to diluted mineral acids Good resistant to oils and petrol Good resistant to organic acids Good resistant to salts |

Complementary

| | |
|------------|-------------------------|
| Net Weight | 0.165 lb(US) (0.075 kg) |
|------------|-------------------------|

Environment

| | |
|---------------------------------------|--|
| protective treatment | TC TH |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Overvoltage category | Class I IEC 60536 Class I NF C 20-030 |

Ordering and shipping details

| | |
|-------------------|---------------|
| Category | US10CS222475 |
| Discount Schedule | 0CS2 |
| GTIN | 3389110628029 |
| Returnability | No |
| Country of origin | FR |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Packing Units

| | |
|------------------------------|-------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 0.9 in (2.2 cm) |
| Package 1 Width | 5.0 in (12.6 cm) |
| Package 1 Length | 6.4 in (16.3 cm) |
| Package 1 Weight | 3.2 oz (92.0 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 30 |
| Package 2 Height | 5.9 in (15.0 cm) |
| Package 2 Width | 11.8 in (30.0 cm) |
| Package 2 Length | 15.7 in (40.0 cm) |
| Package 2 Weight | 6.850 lb(US) (3.107 kg) |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

| | | |
|---|----------------------------|-----|
| ✓ | Reach Free Of Svhc | |
| ✓ | Toxic Heavy Metal Free | |
| ✓ | Mercury Free | |
| ✓ | Rohs Exemption Information | Yes |


Certifications & Standards

| | |
|---------------------------|---|
| Reach Regulation | REACH Declaration |
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |
| California Proposition 65 | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |


Dimensions Drawings

Dimensions and Fixing

Below drawing shows a front plate with 4 cut-outs. Refer to the product characteristics to get the number of cut-outs.

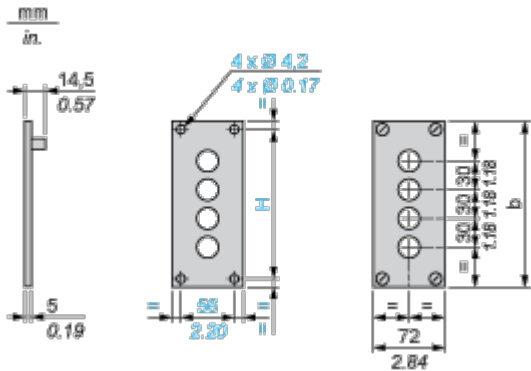

Panel cut-out

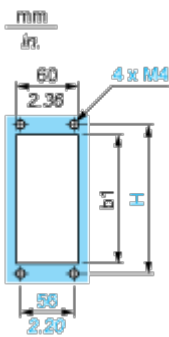

| b | | b1 | | H | |
|-----|------|----|------|----|------|
| mm | in. | mm | in. | mm | in. |
| 105 | 4.13 | 77 | 3.03 | 89 | 3.50 |