

Harmony XB5R, Wireless push button and configurable receiver with 10 colored caps, metal, Ø22, 24...240 V AC/DC

XB4RFA02

Main

Range Of Product	Harmony XB4R	
Product Or Component Type	Wireless and batteryless package	
Device Short Name	XB4R	
Head Material	Metal	
Frequency	2405 MHz for transmitter 2405 MHz for receiver	
Emission Class	5M00G7W	
Antenna Type	Omnidirectional	

Complementary

Control Type	Wireless and batteryless push-button Ø 22 mm assembled on fixing collar	
Type Of Receiver	Programmable receiver (2 relays)	
[Us] Rated Supply Voltage	24240 V AC/DC 50/60 Hz	
Kit Composition	1 diameter: 22 mm 1 push-button head diameter: 22 mm 1 receiver 1 set of caps 1 fixing collars 1 transmitter	
Status Led	1 LED green for power ON 2 LEDs green for relay ON 2 LEDs green for function mode 1 LED green and yellow for reception signal	
Communication Port Protocol	Zigbee conforming to IEEE 802.15.4	
Max Power Consumption In W	1 mW	
Number Of Channels	1	
Modulation Technique	O-QPSK	
Bandwidth	5 MHz	
Antenna Gain	0 dBi	
Customizable	No	
Compatibility Code	XB4R	
[Us] Rated Supply Voltage	24240 V	

Environment

Product Certifications	GOST
	CCC
	CSA
	UL
	C-Tick
Marking	CE
Standards	IEC 60947-1
	IEC 60947-5-1
	CSA C22.2 No 14
	UL 508
Radio Agreement	ANATEL
	FCC
	RSS
	ARIB T66
	ICASA
	SRRC

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	9.200 cm
Package 1 Width	10.500 cm
Package 1 Length	10.800 cm
Package 1 Weight	250.000 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	16
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.459 kg

Contractual warranty

Warranty 18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >

Well-being performance


Mercury Free


|--|--|

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

Dimensions Drawings


Programmable Receiver

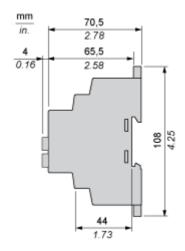


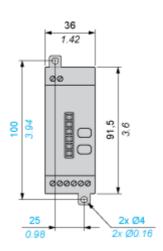

Wireless and Batteryless Pushbutton - Transmitter

With Metal Pushbutton without Cap






e: panel thickness 1 to 6 mm / 0.039 to 0.24 in.


Mounting and Clearance

Receiver Clearance




- (1) Drive
- (2) Power Supply or PLC

Receiver Mounting

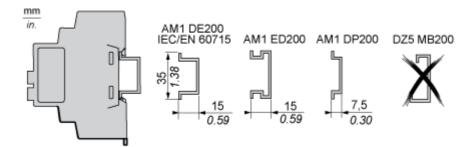

Connections and Schema

Programmable Receiver

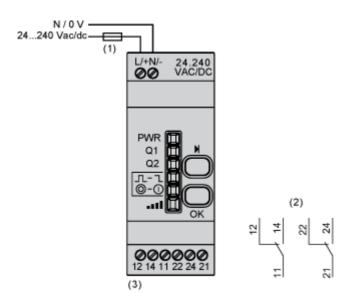

- (1) 500 mA
- (2) Output contacts
- (3) Imax = 3 A