


# Product data sheet

Specifications

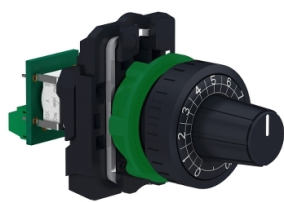

## Complete potentiometer, Harmony XB5, plastic, 22mm, 10K

XB5AD912R10K

Product availability: Stock - Normally stocked in distribution facility

Price\*: 52.56 USD

### Main

Range Of Product	Harmony XB5
Product Or Component Type	Potentiometer
Device Short Name	XB5
Head Type	Standard
Device Presentation	Complete product

### Complementary

Bezel Material	Dark grey plastic
Mounting Diamete	0.87 in (22 mm)
Product Compatibility	Ø 6 mm shaft
Sale Per Indivisible Quantity	1
Cad Overall Width	1.18 in (30 mm)
Cad Overall Height	1.65 in (42 mm)
Cad Overall Depth	3.23 in (82 mm)
Net Weight	0.11 lb(US) (0.048 kg)
Protective Treatment	TH
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature For Operation	-40...158 °F (-40...70 °C)
Electrical Shock Protection Class	Class II IEC 60536
Ip Degree Of Protection	IP66 IEC 60529
Nema Degree Of Protection	NEMA 13 NEMA 4X
Resistance To High Pressure Washer	1015.26 psi (7000000 Pa) 131 °F (55 °C) 0.1 m
Ik Degree Of Protection	IK03 conforming to IEC 50102
Standards	CSA C22.2 No 14 UL 508 EN/IEC 60947-1
Product Certifications	BV CSA UL Listed
Shape Of Signaling Unit Head	Round
Operator Profile	knurled knob, with white)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

[Us] Rated Supply Voltage	<= 42 V DC <= 30 V AC
Rated Power In W	1 W 158 °F (70 °C)
Precision Of Internal Conversion Resistor	+/-10%
Potentiometer Characteristic	Linear
Mechanical Durability	50000 cycles
Ohmic Value	10000 Ohm
Material	Cermet
Vibration Resistance	5 gn 2...500 Hz)IEC 60068-2-6
Shock Resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27
Main Group	Potentiometer
Group Of Product	Potentiometer knurled knob
Colour Of Marking	White

## Ordering and shipping details

Category	US10CS222468
Discount Schedule	0CS2
Gtin	3606480985072
Returnability	Yes
Country Of Origin	FR

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.65 in (4.200 cm)
Package 1 Width	2.20 in (5.600 cm)
Package 1 Length	3.31 in (8.400 cm)
Package 1 Weight	2.05 oz (58.000 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	5.90 lb(US) (2.678 kg)

## Sustainability




**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

## Well-being performance

 Reach Free Of Svhc	
 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Dimensions

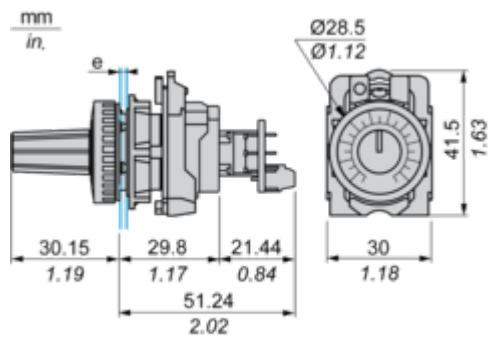


e: Panel thickness: 1 mm to 6 mm / 0.03 in. to 0.24 in.


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Terminals or Plug-in Connectors

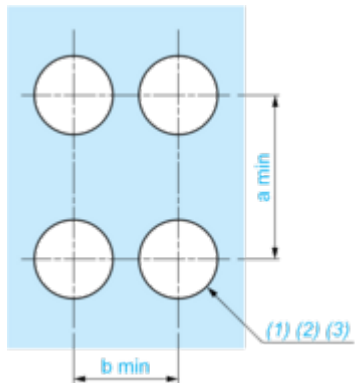


Connection by Faston Connectors

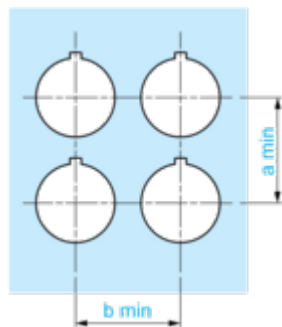

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26

Detail of Lug Recess

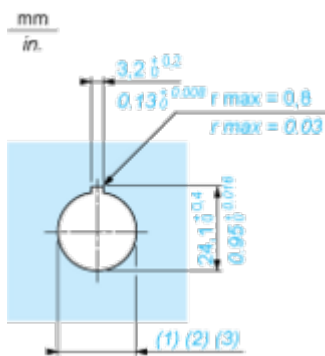

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $Ø22.3_0^{+0.4}$ ) / Ø0.89 in. recommended ( $Ø0.88_0^{+0.016}$ )

