

# Product data sheet

Specifications



Annunciator, Harmony XB5,  
Complete buzzer, plastic, 22mm,  
continuous or intermittent tone,  
110...120V AC

XB5KSG

## Main

Range Of Product	Harmony XB5
Product Or Component Type	Annunciator
Bezel Material	Dark grey plastic
Mounting Diamete	0.87 in (22 mm)
Head Type	Standard
Cap/Operator Or Lens Colour	Black

## Complementary

Supply Circuit Type	AC/DC
Supply Frequency	50/60 Hz
Signalling Type	Continuous or intermittent tone
Noise Level	90 dB 6.8 kHz 0.1 m +/- 10 %
Resistance To High Pressure Washer	1305.34 psi (9000000 Pa) 176 °F (80 °C) 0.1 m
Height	1.14 in (29 mm)
Width	1.14 in (29 mm)
Depth	2.17 in (55 mm)
Net Weight	0.05 lb(US) (0.024 kg)
Current Consumption	<= 20 mA
[Us] Rated Supply Voltage	120 V +/- 10 %

## Environment

Protective Treatment	TH
Ambient Air Temperature For Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature For Operation	-40...158 °F (-40...70 °C)
Overvoltage Category	Class II IEC 60536
Electrical Shock Protection Class	Class II IEC 60536
Nema Degree Of Protection	NEMA 13 NEMA 4X

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	IEC 60947-1
	IEC 60947-5-1
	UL 508
	IEC 60947-5-4
	IEC 60947-1
	CSA C22.2 No 14
	JIS C8201-5-1
	IEC 60947-5-4
	IEC 60947-5-1
	JIS C8201-1
	IEC 60529
	IEC 62262
	IEC 50102
Product Certifications	UL listed
	CSA
	BV

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	1.26 in (3.2 cm)
Package 1 Width	1.34 in (3.4 cm)
Package 1 Length	2.28 in (5.8 cm)
Package 1 Weight	0.99 oz (28.0 g)
Unit Type Of Package 2	S01
Number Of Units In Package 2	88
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	6.16 lb(US) (2.796 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.



[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance


 Mercury Free	
 RoHS Exemption Information	Yes

Certifications & Standards

Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	No need of specific recycling operations

Dimensions Drawings

Dimensions

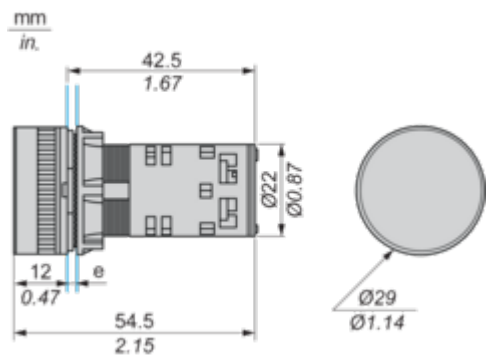


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Panel Cut-out for Buzzer

Connection by Screw Clamp Terminals

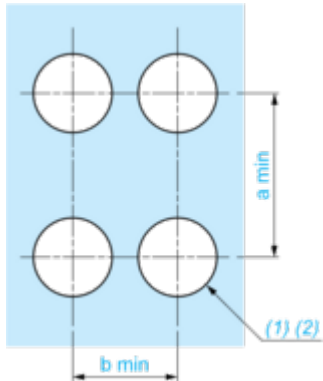


(1) Diameter on finished panel or support

(2) Ø22.5 mm recommended ( $\text{Ø}22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in.} \begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18

Connections and Schema

Cabling of Annunciators

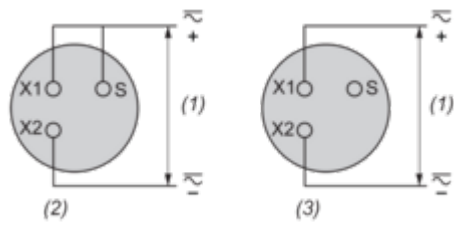

- (1) Supply
- (2) Intermittent
- (3) Continuous