

# Product datasheet

Specifications



## Bistable USB Biometric switch - connection with 2m cable

XB5S3B2L2

⚠ Discontinued on: 01-Sept-2020

⚠ End-of-service on: 30-Jun-2022

⚠ Discontinued

### Main

Product Or Component Type	Biometric switch
Product Specific Application	Materials handling Industrial machines
Device Short Name	XB5S
Bezel Material	Dark grey plastic
Mounting Diamete	22 mm
Output Type	PNP
Sale Per Indivisible Quantity	1
Ip Degree Of Protection	IP20 (rear face) conforming to EN/IEC 60529 IP65 (front face) conforming to EN/IEC 60529
Type Of Operator	Stay put
Operator Position Information	2 positions
Operator Profile	fingerprint reader
Connections - Terminals	1 pre-wired cable, 3 x 0.11 mm²
Memory Usage	200 users with up to 2 fingerprints per user

### Complementary

Software Designation	XB5SSoft
Enclosure Material	Polyamide PA66
Cable Insulation Material	PvR
Operating Position	Vertical surface installation Flat surface installation Horizontal position
Function Of Module	Bi-stable
Net Weight	0.202 kg
Marking	CE
Port Protocol	USB
Connector Type	USB type A male with 1 m cable
Local Signalling	1 LED (green) for output state indicator 1 LED (red) for error
Short-Circuit Protection	250 mA external fuse type gG
[Us] Rated Supply Voltage	24 V DC
Electrical Connection	free wire ends with 3 wires of 2 m

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Supply Voltage Limits	20...30 V DC
Protection Type	Reverse polarity Short-circuit Overload protection
Maximum Switching Current	200 mA
[Ures] Residual Voltage	1 V closed state
Current Consumption	<= 70 mA no-load
Maximum Delay First Up	3 s + 0.5 ms per user registered
Maximum Delay Recovery	1.5 s
Maximum Delay Response	1.5 s

## Environment

Range Of Product	Harmony XB5S
Ambient Air Temperature For Storage	-25...70 °C
Ambient Air Temperature For Operation	-5...50 °C
Nema Degree Of Protection	NEMA 12
Standards	IEC 61000-6-4 IEC 61000-6-2
Product Certifications	CSA UL
Vibration Resistance	+/- 3 mm (f= 5...9 Hz) conforming to IEC 60068-2-6 1 gn (f= 9...500 Hz) conforming to IEC 60068-2-6
Shock Resistance	50 gn 11 ms conforming to IEC 60068-2-27

## Contractual warranty

Warranty	18 months
----------	-----------

# Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.



[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)




Transparency

## Well-being performance

 Mercury Free	
 Rohs Exemption Information	<a href="#">Yes</a>
Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions of Biometric Switches

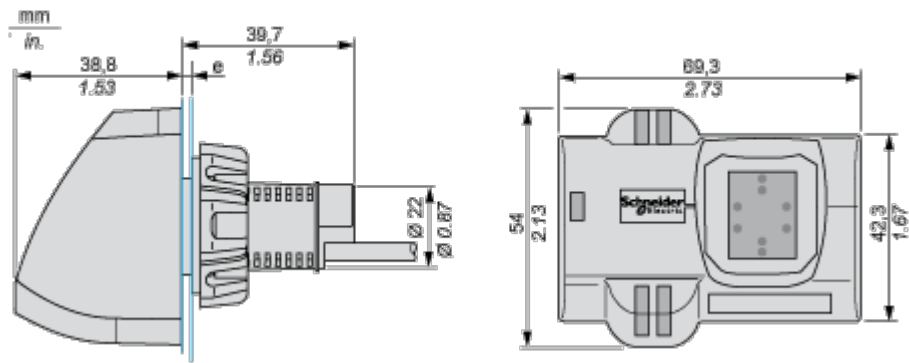


e: 1 to 6 mm / 0.04 to 0.24 in.

Connections and Schema

Cable with PNP Output

---



- BU: Blue
- BN: Brown
- BK: Black