


# Product data sheet

Specifications



## rectangular red pushbutton Ø 16 - flush spring return - 2OC

XB6EDA42P

⚠ Discontinued on: Jan 23, 2021

⚠ Discontinued

### Main

Range of Product	Harmony XB6E
Product or Component Type	Monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diamete	0.6 in (16 mm)
Sale per indivisible quantity	5
Shape of signaling unit head	Rectangular
Type of operator	spring return
Operator profile	Red flush
Contacts type and composition	2 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston 2.8 x 0.5 mm Solder terminal <= 0.75 mm² AWG 19 Fast connector socket
Contacts material	Gold-flashed silver

### Complementary

Net Weight	0.013 lb(US) (0.006 kg)
Overvoltage category	II IEC 60536
Operating position	Any position
marking	CE
Mechanical durability	1000000 cycles
Tightening torque	5.3...8.9 lbf.in (0.6...1 N.m)
Contact resistance	50 mOhm 1/6 V
Short-circuit protection	2 A cartridge fuse gG
[Ith] conventional free air thermal current	3 A fast connector socket) 5 A
[Ie] rated operational current	1.5 A 120 V, AC-12 EN/IEC 60947-5-1 1 A 240 V, AC-12 EN/IEC 60947-5-1 0.7 A 240 V, AC-13 EN/IEC 60947-5-1 1 A 120 V, AC-13 EN/IEC 60947-5-1 1 A 24 V, DC-12 EN/IEC 60947-5-1 0.7 A 24 V, DC-13 EN/IEC 60947-5-1 0.2 A 125 V, DC-12 EN/IEC 60947-5-1 0.15 A 125 V, DC-13 EN/IEC 60947-5-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Electrical durability	100000 cycles, AC, 0.7 A 220 V EN/IEC 60947-5-1 appendix C
-----------------------	--

## Environment

Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	14...131 °F (-10...55 °C)
IP degree of protection	IP65 IEC 60529
Standards	JIS C 4520 JIS C 852 UL 508 IEC 60947-1 CSA C22.2 No 14 IEC 60947-5-1
Product Certifications	cURus CCC
Vibration resistance	1 mm 10...55 Hz)IEC 60068-2-6
Shock resistance	10 gn 11 ms) half sine wave acceleration IEC 60068-2-27

## Ordering and shipping details

Category	22459-PUSHBUTTONS, 16MM
Discount Schedule	CS2
GTIN	03389110629705
Returnability	No
Country of origin	CN

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability





**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


## Well-being performance

	Reach Free Of Svhc	
	Toxic Heavy Metal Free	
	Mercury Free	
	Rohs Exemption Information	Yes
Reach Regulation	<a href="#">REACH Declaration</a>	
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>	
China Rohs Regulation	<a href="#">China RoHS declaration</a>	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.	
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>	

Dimensions Drawings

Pushbutton

Rectangular Head

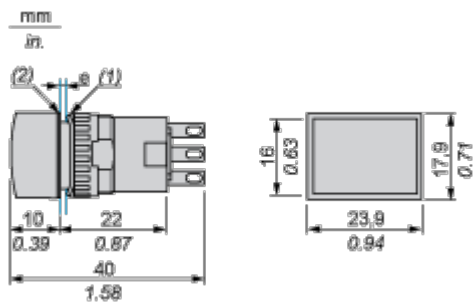

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)
- (2) Seal (thickness: 0.5 mm / 0.01 in.)
- e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

Mounting and Clearance

Panel Cut-Out and Mounting

Rectangular Head

