

Product data sheet

Specifications



small panel touchscreen+keypad -
matrix screen - green - 198 x 80
pixels - 5VDC

XBTRT500

 **Discontinued on:** Dec 31, 2016

 **Discontinued**

Main

Range Of Product	Magelis XBTRT
Display Resolution	198 x 80 pixels
Software Type	Configuration software
Software Designation	Vijeo Designer Lite
Operating System	Windows

Complementary

Display Type	Extra-bright matrix backlit LCD
Touch Panel	Matrix
Touch Sensitive Zone	11 x 5 cells
Character Font	Latin Chinese (simplified Chinese) Cyrillic Katakana Greek
Number Of Key	12
Number Of Fixed Keys	2
Number Of Customisable Keys	10
Number Of Pages	256 alarm pages 200 application pages
Memory Type	Flash
Memory Capacity	512 KB
Integrated Connection Type	Serial link female RJ45, asynchronous RS232C/RS485)point-to-point
Realtime Clock	Access to the PLC real-time clock
Range Compatibility	Modicon M340 Modicon Premium Twido Modicon TSX Micro
Product Mounting	Flush mounting
Fixing Mode	By 4 spring clips (1.5 to 6 mm thick panel)
Display Material	Polyester
Front Material	PPT
Keypad Material	Polyester
Marking	CE

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Height	4.65 in (118 mm)
Width	5.39 in (137 mm)
Depth	3.11 in (79 mm)
Cut-Out Dimensions	119.6 (+/- 0.5) x 105.2 (+/- 0.4) mm
Net Weight	1.21 lb(US) (0.55 kg)

Environment

Product Or Component Type	Small panel with touchscreen and keypad
Display Colour	Green
Display Capacity	10 lines of 33 characters maximum 2 lines of 5 characters minimum Graphic objects (bargraph, button, light...)
[Us] Rated Supply Voltage	5 V DC
Supply	From PLC (terminal port)
Downloadable Protocols	Third party protocols Uni-TE Modbus
Standards	IEC 61131-2 CSA C22.2 No 14 IEC 60068-2-27 UL 508 IEC 60068-2-6
Product Certifications	UL 1604 ATEX zone 2/22 CSA Class 1 Division 2 UL Class 1 Division 2
Ambient Air Temperature For Operation	32...131 °F (0...55 °C)
Ambient Air Temperature For Storage	-4...140 °F (-20...60 °C)
Relative Humidity	0...85 % without condensation
Ip Degree Of Protection	IP20 IEC 60529 rear panel) IP65 IEC 60529 front panel)
Nema Degree Of Protection	NEMA 4X front panel indoor use)
Shock Resistance	15 gn 11 ms IEC 60068-2-27
Vibration Resistance	+/- 3.5 mm 2...8.45 Hz)IEC 60068-2-6 1 gn 8.45...150 Hz)IEC 60068-2-6
Resistance To Electromagnetic Fields	9.14 V/m (10 V/m) IEC 61000-4-3

Ordering and shipping details


Category	22570-MAGELIS TEXT DISPLAYS & ACCESS
Discount Schedule	MC2
Gtin	00785901603009
Returnability	No
Country Of Origin	CN

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings


Dimensions

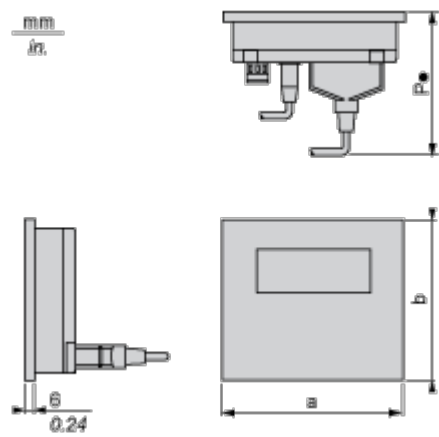

a		a1 (1)		b		b1 (1)		P1 (2)		P2 (3)		P3 (4)		P4 (5)	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
137	5.39	160	6.29	118	5	146	6	79	3.11	104	4.09	58	2.28	104	4.09
<div><div>(1) With fixing clips (included with product)</div><div>(2) P1: depth with RJ45 cable XBTZ9780 (for Twido, TSX Micro and Premium)</div><div>(3) P2: depth with 25-way SUB-D cable XBTZ938 (for TeSys model U and ATV 61/71 drives)</div><div>(4) P3: depth with 25-way SUB-D angled cable XBTZ9680 (for Twido, TSX Micro and Premium) or XBTZ998 (for Modicon STB)</div><div>(5) P4: depth with 25-way SUB-D cable XBTZ68/Z9681(for Twido, TSX Micro and Premium)</div></div>															

Mounting and Clearance

Cut-out for Flush Mounting



Panel thickness = 1.5...6 mm / 0.05...0.23 in.

H		G		r max.	
±0.4 mm	±0.02 in.	±0.5 mm	±0.02 in.	mm	in.
105.2	4.14	119.6	5	1.5	0.05