Product data sheet

Specification





safety controller, Harmony XPS MC, 24V DC, 32 inputs, 48 LEDs signalling, Profibus

XPSMC32ZP

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 2,940.00 USD

Main

Range Of Product	Preventa Safety automation
Product Or Component Type	Configurable safety controller
Safety Module Name	XPSMC
Safety Use Category	Category 4 maximum EN 954-1/EN/ISO 13849-1 PLE maximum ISO 13849-1 SIL 3 maximum IEC 61508
Type Of Start	Configurable
Standards	EN 954-1/EN/ISO 13849-1 IEC 61496-1 IEC 61508 IEC 60204-1 EN 1760-1/ISO 13856-1 EN 574/ISO 13851 IEC 60947-5-1
Product Certifications	CSA UL TÜV
[Us] Rated Supply Voltage	24 V DC - 2020 %
Number Of Inputs	32
Communication Port Protocol	Modbus 1 RJ45, serial link 1200 bps, 2400 bps, 4800 bps, 9600 bps or 19200 bps Profibus 1 SUB-D 9-pin female, serial link 12 Mbps
Safety Level	Can reach PL e/category 4 EN 954-1/EN/ISO 13849-1 Can reach SIL 3 IEC 61508

Complementary

Function Of Module	Dynamic monitoring of hydraulic valves on linear presses Eccentric press
	Emergency stop monitoring, with or without time delay, 1 or 2-channel wiring
	Enabling switch monitoring, 2 or 3 contacts
	Foot switch monitoring
	Guard monitoring for injection presses and blowing machines
	Guard monitoring with 1 or 2 limit switches
	Hydraulic press
	· ·
	Magnetic switch monitoring category 4 EN/IEC 61496
	Monitoring safety stop at top dead centre on eccentric press category 3 EN 574/ISO
	13851
	Muting function of light curtains
	Position selector
	Safety mat monitoring
	Safety time delays
	Shaft/chain breaking monitor
	Zero speed detection
	Light curtain monitoring category 4 IEC 61496
	Two-hand control category 3 EN 574/ISO 13851

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Synchronisation Time Between Inputs	Depending on configuration selected
Power Consumption In W	12 W
Input Protection Type	External fuse 16 A
[Uc] Control Circuit Voltage	28.8 V
Maximum Line Resistance	100 Ohm <6561.68 ft (2000 m)
Output Type	2 relays, 2 NO contacts (4 NO total) Solid state, 6, volt-free
Breaking Capacity	180 VA holding AC-15 C300 relay output 1800 VA inrush AC-15 C300 relay output
Breaking Capacity	2 A 24 V static output circuit 1.5 A 24 V DC-13)50 ms relay output
Output Thermal Current	4 A for both outputs simultaneously 6 A for 1 output and 2 A for the other relay output
[Ith] Conventional Free Air Thermal Current	16 A relay output 6.5 A static output circuit
Associated Fuse Rating	16 A gL power supply 4 A gL relay output 6 A fast blow relay output
Minimum Output Current	10 mA relay output
Minimum Output Voltage	17 V relay output
Response Time	Configurable : 20 ms or 30 ms with software XPSMCWIN
[Ui] Rated Insulation Voltage	300 V 2)IEC 60647-5-1, DIN VDE 0110 part 1
[Uimp] Rated Impulse Withstand Voltage	4 kV III IEC 60647-5-1, DIN VDE 0110 part 1
Method Of Access	Slave
Exchange Size	14 words
Number Of Addresses	1125 Profibus 1247 Modbus
Parity	Even Modbus No Modbus Odd Modbus
Data Format	1 start bit/8 data bits 1 stop bit even or odd 2 stop bits without parity RTU (Remote Terminal Unit) mode
Supported Modbus Function	01 8-bit output data/32-bit input data 02 32-bit input data/8-bit output data 03 information and errors
Local Signalling	48 LEDs
Mounting Support	Mounting plate
Depth	6.02 in (153 mm)
Height	5.96 in (151.5 mm)
Width	2.91 in (74 mm)
Net Weight	1.85 lb(US) (0.84 kg)

Environment

Ip Degree Of Protection	IP20 conforming to IEC 60529
Ambient Air Temperature For Operation	14131 °F (-1055 °C)
Ambient Air Temperature For Storage	-13185 °F (-2585 °C)

Ordering and shipping details

Category	US1SAF222477
Discount Schedule	SAF2
Gtin	3389119010290
Returnability	Yes
Country Of Origin	FR

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.74 in (9.500 cm)
Package 1 Width	7.09 in (18.000 cm)
Package 1 Length	10.28 in (26.100 cm)
Package 1 Weight	2.84 lb(US) (1.288 kg)
Unit Type Of Package 2	S04
Number Of Units In Package 2	6
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	15.75 in (40.000 cm)
Package 2 Length	23.62 in (60.000 cm)
Package 2 Weight	18.87 lb(US) (8.560 kg)

Contractual warranty

May 29, 2024

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


Ø	Mercury Free	
	Rohs Exemption Information	Yes
②	Pvc Free	

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	End of Life Information
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Dimensions Drawings

Dimensions

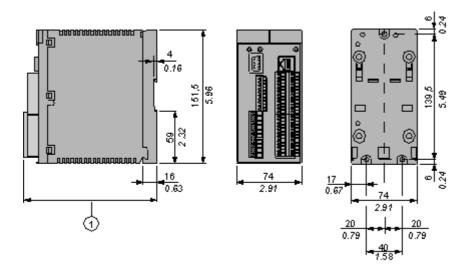

When using XPSMCTS+ connectors this dimension is 153 mm (6.02 in) When using XPSMCTC• connectors this dimension is 151,5 mm (5.96 in) Mounting and Clearance

Installation

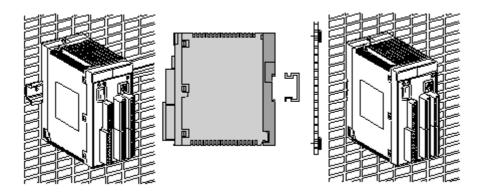

Metal adaptor for fixing on metal: DIN rail 35 mm/1.38 in.

XPSMC32ZP

Connections and Schema


Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:



XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC
Download XPSAC5121 product datasheet

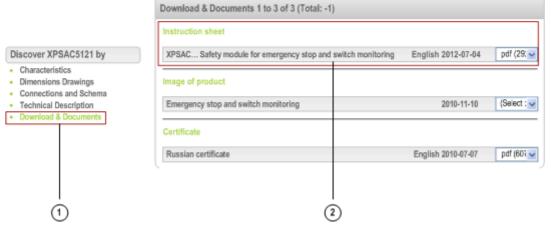


- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.

XPSMC32ZP

Technical Description

Safety Functions

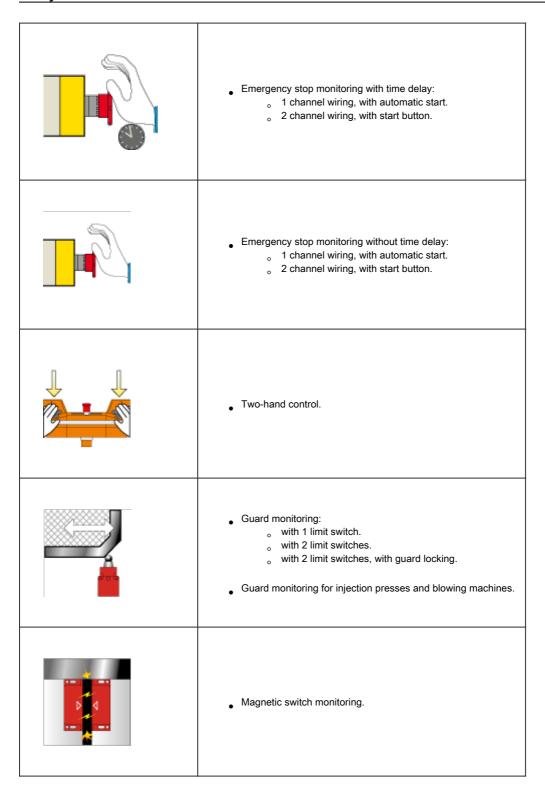

Product data sheet

XPSMC32ZP

• Sensing mat monitoring.
 Light curtains monitoring: Relay output type. Solid-state output type. "Muting" function for light curtains.
Zero speed detection.
Dynamic monitoring of hydraulic valves on linear presses.
• Safety time delays.
Monitoring safety stop at top dead centre on eccentric press. Hydraulic press. Eccentric press.

Product data sheet

XPSMC32ZP



- Enabling switching monitoring:
 - 2 contact type.3 contact type.

Other functions:

- Foot switch monitoring
- Chain shaft breakage monitoring
- Position selector