Product data sheet

Main





Complete beacon, Harmony XVB Universal, yellow strobe

XVBL8M8

Discontinued on: Jun 30, 2023

Product availability: Non-Stock - Not normally stocked in distribution facility

① Discontinued

Range of Product	Harmony XVB Universal	
Product or Component Type	Complete beacon	
Beacon or indicator bank unit type	Base unit direct or tube fixing Illuminated unit	
Signalling type	Flashing	
Mounting diameter	2.8 in (70 mm)	
Component name	XVBL	
Material	Glass reinforced polyamide: base unit Polycarbonate: illuminated unit	
Light source	Integral flash discharge tube, yellow	
Bulb type	Flash discharge tube	
[Us] rated supply voltage	230 V AC	

Complementary

Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm² with cable end	
[Ui] rated insulation voltage	250 V IEC 60947-1	
Nominal voltage limit	0.851.1 Un IEC 60947-5-1	
Current consumption	< 280 mA AC	
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1	
Flash energy	10 J	
Flashing frequency	1 Hz	
CAD overall width	2.8 in (70 mm)	
CAD overall height	9.1 in (232 mm)	
CAD overall depth	2.8 in (70 mm)	
Terminals description ISO n°1	(COM-1)PW (GND)GROUND	
Net Weight	1.01 lb(US) (0.46 kg)	

Environment

Product Certifications	CCC
	EAC
	CSA C22-2 No 14
	UL 508

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Life Is On Schneider Aug 12, 2024

Standards	EN/IEC 60947-5-1	
protective treatment	TC	
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)	
Electrical shock protection class	S Class I on support tube IEC 61140 Class II on base unit IEC 61140	
IP degree of protection	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529	
NEMA degree of protection	Type 4X UL indoor)	

Ordering and shipping details

Category	US100XV22611	
Discount Schedule	00XV	
GTIN	3389110845013	
Returnability	No	
Country of origin	FR	

Packing Units

Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	9.9 in (25.2 cm)	
Package 1 Width	3.1 in (8.0 cm)	
Package 1 Length	3.1 in (8.0 cm)	
Package 1 Weight	16.2 oz (460.0 g)	
Unit Type of Package 2	S03	
Number of Units in Package 2	12	
Package 2 Height	11.8 in (30.0 cm)	
Package 2 Width	11.8 in (30.0 cm)	
Package 2 Length	15.7 in (40.0 cm)	
Package 2 Weight	13.741 lb(US) (6.233 kg)	

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

XVBL8M8

Dimensions Drawings

Illuminated Beacon with "Flash" Discharge Tube Unit

Dimensions

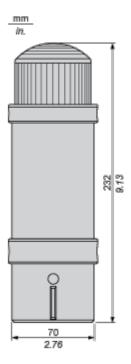

Product data sheet

XVBL8M8

Connections and Schema

Illuminated Beacon

Wiring Diagram

