


# XVC1B5SK

## 100mm Tower ROGBC Base Mount Buzzr Flash



Product availability: Non-Stock - Not normally stocked in distribution facility



### Main

Range of product	Harmony XVC1
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	3.94 in (100 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green LED steady or flashing blue LED steady or flashing clear
[Us] rated supply voltage	24 V
Supply circuit type	DC
Noise level	60...85 dB continuous or intermittent tone)1 m

### Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94-V0) top cover
Product mounting	On base
Cable cross section	0.00 In <sup>2</sup> (0.83 mm <sup>2</sup> ) 0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22 AWG 18
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	550 mA
Flashing frequency	0.7...3 Hz
Net weight	3.31 lb(US) (1.5 kg)
Height	20.79 in (528 mm)

### Environment

Standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3 EN/IEC 61000-6-4
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	-22...122 °F (-30...50 °C)
Electrical shock protection class	Class II EN/IEC 61140
IP degree of protection	IP54 EN/IEC 60529

## Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901811107
Package weight(Lbs)	2.54 kg (5.6 lb(US))
Returnability	No
Country of origin	JP

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

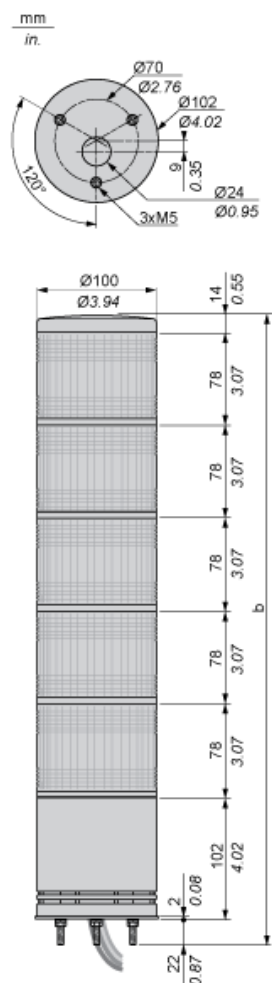

No. of illuminated units	b in mm	b in in.
1	216	8.50
2	294	11.57
3	372	14.65
4	450	17.72
5	528	20.79

---

Pre-assembled and Pre-wired Tower Light

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

