

Product availability: Non-Stock - Not normally stocked in distribution facility



### Main

Range of product	Harmony XVC1
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	2 illuminated units
Sound signalling	Without
Mounting diameter	3.94 in (100 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange
[Us] rated supply voltage	100...240 V
Supply circuit type	AC

### Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94-V0) top cover
Product mounting	On base
Cable cross section	0.00 In <sup>2</sup> (0.33 mm <sup>2</sup> ) 0.00 in <sup>2</sup> (0.83 mm <sup>2</sup> )
AWG gauge	AWG 18 AWG 22
Cable length	19.69 in (500 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	4 kV
Current consumption	120 mA
Flashing frequency	0.7...3 Hz
Net weight	2.65 lb(US) (1.2 kg)
Height	11.57 in (294 mm)

### Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	-22...122 °F (-30...50 °C)
Electrical shock protection class	Class I EN/IEC 61140
IP degree of protection	IP54 EN/IEC 60529

### Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	00785901713616
Package weight(Lbs)	1.68 kg (3.7 lb(US))
Returnability	No
Country of origin	JP

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


## Contractual warranty

Warranty	18 months
----------	-----------

## Pre-assembled and Pre-wired Tower Light

## Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

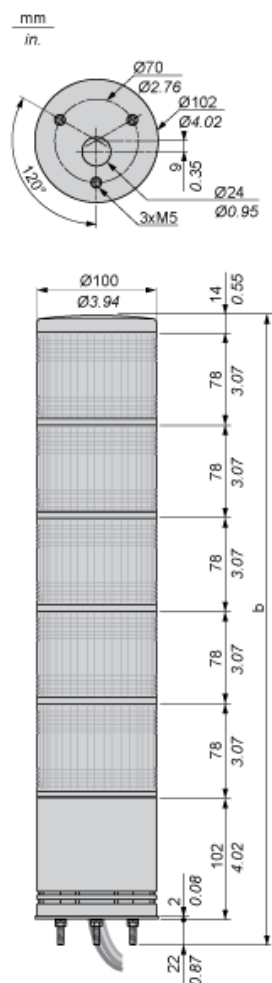

No. of illuminated units	b in mm	b in in.
1	216	8.50
2	294	11.57
3	372	14.65
4	450	17.72
5	528	20.79

---

Pre-assembled and Pre-wired Tower Light

---

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

